


**AURORA™
NO-CALK®
SOLAR FLASHINGS**



Engineering Specification: Oatey Aurora No-Calk Solar Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the piping for solar mounting system is required. Low profile flashing collar design provides a clean finished appearance. Solar Flashings are available in Soft Aluminum, Aluminum and Galvanized Bases.

Job Reference

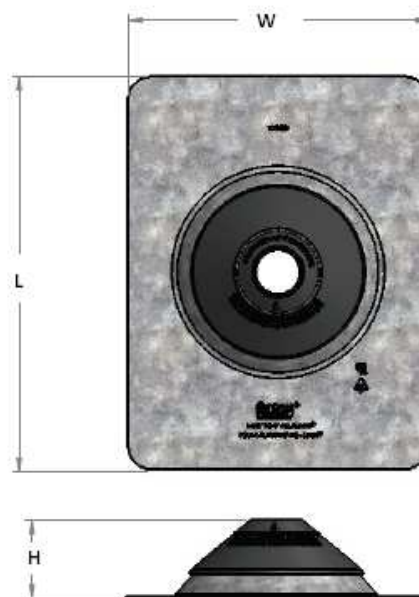

(All dimensions in inches)

- ♦ Solar Flashing slides over piping penetrations
- ♦ Non-fading sealing collar
- ♦ Not for hot-mopped or built-up installations
- ♦ Do not use paint or petroleum based products on rubber collars

✓	Product No.	Description	Length (L)	Width (W)	Height (H)	PACK	Ctn. Weight (lbs.)
	11831	½" – 1" Galvanized No-Calk Solar Flashing	18	18	2.4	12	23
	11833	½" - 1" Soft Aluminum No-Calk Solar Flashing	18	18	2.4	12	15
	12801	½" – 1" Galvanized No-Calk Solar Flashing	12-½	9-½	1.4	12	9
	12803	1-½" – 3" Galvanized No-Calk Solar Flashing	12-½	9-½	2.4	12	10
	12802	½" – 1" Aluminum No-Calk Solar Flashing	12-½	9-½	1.4	12	5
	12804	1-½" – 3" Aluminum No-Calk Solar Flashing	12-½	9-½	2.4	12	5



Data is subject to manufacturing tolerances.