

Fast Trak™ 1.3i

Submittal Information
Revision B: June 27, 2011

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:


Manufacturer's Representative:

Approved By:

Technical Data

Material: Black polystyrene, expanded polystyrene

Panel coverage: 12.1 sq. ft.

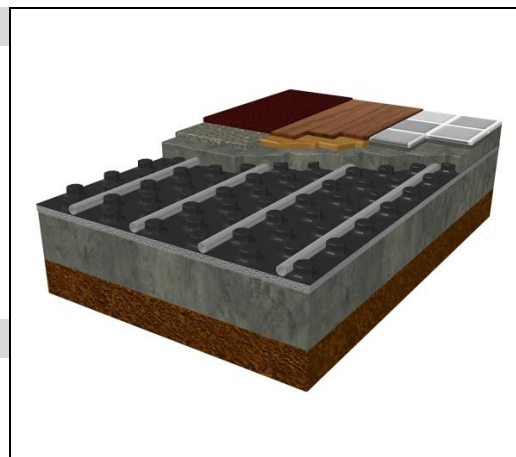

Product Information and Application Use

Fast Trak™ 1.3i is an overpour installation method for remodel and retrofit applications. The preformed knobbed panels are designed for installing 3/8" or 1/2" crosslinked polyethylene (PEX) tubing for radiant floor heating and cooling systems. Fast Trak 1.3i panels feature insulation in the mat.

✓ Description	Part Number	Insulation R-value	Length	Width	Height	Weight
Fast Trak 1.3i	A5090500	1.7	57.1"	33.5"	1.28"	2.0 lbs.

Installation

Fast Trak 1.3i panels are designed for overpour applications. To install the panels, first apply Fast Trak Edge Strips (A5091000) along the walls to prevent overpour from seeping under the panels and to protect the surrounding structure from moisture damage and expansion forces. Lay Fast Trak panels directly on the subfloor and snap PEX tubing between the knobs. After connecting PEX tubing to the manifold and pressure testing the system, install the overpour according to manufacturer's recommendations or local code. For further information, see the Fast Trak Installation Guide.

Standards

N/A

Codes

N/A

Listings

N/A

Related Applications

Radiant Heating and Cooling Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
2000 Argenta Road, Plaza 1, Suite 200
Mississauga, ON L5N 1W1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca