



PF92370 Thermoplastic Sump Pump

Product Features

- Tough thermoplastic construction
- SJE Rhombus tethered float switch
- 1-1/2" NPT Discharge
- Handles up to 3/8" solids
- Clog resistant impeller
- Carrying handle attached
- 10' power supply cord
- Built-in thermal overload protection for safety
- Permanent split capacitor continuous duty motor
- 4.1 amps, 492 Watts
- 3450 RPM




PF92370

Motor Performance

- 1/3HP 120 Volt AC (4.1 amps)

Performance Chart						
Lift	0'	5'	10'	15'	20'	25'
GPM	48	44	40	36	23	16
GPH	2880	2640	2400	2160	1380	960

Product Specifications

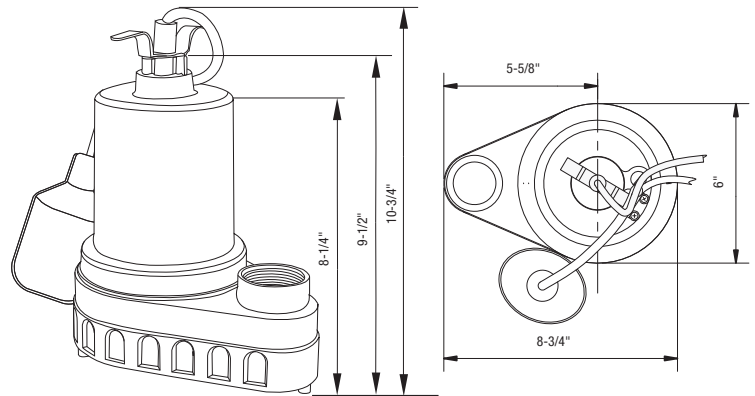

* All measurements are nominal. Please verify before actual installation.

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO sump pump carries a 3 year warranty when installed in residential applications. See owners manual for warranty details.

This PROFLO sump pump carries a 3 year limited warranty. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless it is agreed in writing to do otherwise.



PROFLO.COM