

900 Series

COPPERLOC Non-Removable Copper Push End Coupling With Stop CxC (1/2" through 1")

SUBMITTAL SHEET



| | |
|------------------|--|
| Job Name: | |
| Job Location: | |
| Engineer: | |
| Contractor: | |
| Tag: | |
| PO#: | |
| Rep: | |
| Wholesale Dist.: | |

DESCRIPTION

The CopperLoc® 900 Non-Removable Push Coupling With Stop features a lead-free dezincification resistant copper body, a stainless steel grab ring, a nylon separation ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly made In the USA.

FEATURES

- Sizes: 1/2", 3/4", 1"
- Lead free construction
- No special tools required

PERFORMANCE RATING

- Maximum Pressure: 200 psi (13.7 bar)
- Temperature Range: 32°F - 250°F, (0°C - 121°C)

APPROVALS


- cUPC® Compliant
- ARRA Compliant
- NSF/ANSI 372 Lead Free
- NSF/ANSI 61 Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

| | |
|--------------|------------------------------|
| Body | UNS C12200 Copper |
| Grab Ring | Stainless Steel |
| Support Ring | Nylon |
| O-Ring | EPDM |
| Lubrication | Silicone, ANSI/NSF-61 Listed |

DIMENSIONS

| ITEM NO. | SIZE (IN.) | DIMENSIONS (IN.) | | | | | | | WT. (LBS.) |
|----------|-------------|------------------|------|------|------|--------|-------|-------|------------|
| | | A | B | C | D | HEIGHT | WIDTH | DEPTH | |
| 10170700 | 900 1/2 CXC | 1.53 | 0.90 | 0.66 | 0.15 | 0.90 | 1.53 | 0.90 | 0.06 |
| 10170705 | 900 3/4 CXC | 1.63 | 1.18 | 0.72 | 0.13 | 1.18 | 1.63 | 1.18 | 0.10 |
| 10170710 | 900 1 CXC | 1.57 | 1.47 | 0.78 | 0.11 | 1.48 | 1.57 | 1.48 | 0.14 |

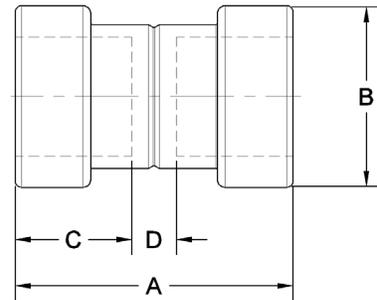

* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.