
UNDER-CABINET

A discreet, European-style, professional-looking range hood, Gust adds fashion to under-cabinet installations. With its mechanical controls neatly tucked away below the canopy, Gust provides the subtlety its owners re-

quire. Its perfectly curved corners and understated top-mounted return-air louver offer further evidence that Gust spares nothing when it comes to quality construction. Available with optional recirculating kit and baffle filters.









TOP





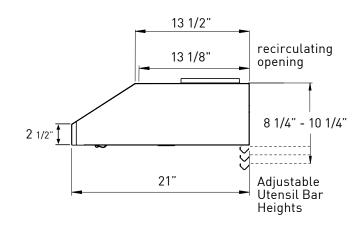

SIDE

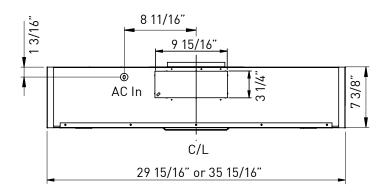

UNDER-CABINET



ZYU CFM AC POWEK	12UV, 6UHz at Max. 1.55A	12UV, OUTIZ AT MAX. 1.55A
DUCT SPECIFICATIONS Vertical Internal Blower Horizontal Internal Blower 400 CFM AC POWER 290 CFM AC POWER	7" Round or 3-1/4" x 10" 3-1/4" x 10" 120V, 60Hz at Max. 1.7A 120V, 60Hz at Max. 1.55A	7" Round or 3-1/4" x 10" 3-1/4" x 10" 120V, 60Hz at Max. 1.7A 120V, 60Hz at Max. 1.55A
Recirculating Option	Baffle x2 (AK7100AS-BF) Yes	Baffle x2 (AK7136AS-BF) Yes
Dual-Level Lighting Filters	Yes Aluminum Mesh x2	Yes Aluminum Mesh x2
Lighting	Halogen, 50W x2	Halogen, 50W x2
Auto Delay-Off	No	No
FEATURES Controls Speed Levels	Mechanical Slide	Mechanical Slide
290 Sones (Min Max.)	1.1 - 3.2	1.1 - 3.2
290 CFM (Min Max.)	120 - 290	120 - 290
Size Blower CFM (Min Max.) Sones (Min Max.)	30" 210 - 400 2 - 5	36" 210 - 400 2 - 5

^{*}Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

