Models: SM-11

STEAMIST®


Steam Generator

Features

Limited Lifetime warranty - 2-year labor in home labor warranty where available Generator typically can be installed up to 25 ft. from the bathing area Diagnostic LED Displays Stainless Steel Construction Solid-State Circuitry

Codes/Standards

UL 499 UL/CUL Listed City of LA - Approved City of New York - M.E.A Approved State of Mass. Approved



Steam Generator Specification Chart						
Model Number	Product Number	KW Rating	*Max. Cu. Ft. Range	Volts/Phase/ Max. Amps	Line Fuse	Dimensions L x W x H
SM-11	1100 1101 1102 1103	11	500	240/1/46 208/1/53 240/3/27 208/3/31	60 70 40 40	17¾" x 7½" x 15½"

Refer to sizing guidelines to accurately determine the proper size generator for the installation.
90°C copper wire is required for generator connection. Installation shall be in accordance with NEC and local electrical codes.

Required Equipment

SMC-120, SMC-150, TC-110, TC-135, TC-125, TC-150, DSC-425, or DSP Controls

Required Electrical Service

Dedicated circuit required: See Specification Chart for proper electrical requirements

Product Information

Water Supply - %" Compression Fitting, 120 PSI Max Steam Line - ¾" Brass BPT male thread

Pressure Relief Valve - ¾" NPT female thread

Drain Line - Capped $\frac{1}{2}$ " Brass NPT male thread.

Generator

Weight - 40 lbs.

Installation Notes

Steam Generators can be typically mounted within 25 ft. of the bathing area.

Steam Generators should be accessible for service.


Do not install generators outside, in moist, humid area or in an area where parts may freeze or corrode.

Steamhead to be mounted 18" above floor or 6" above rim of tub and as far from the seating area as possible.

Rough-in Notes

Access: 28" W x 18" D x 22" H (35" W with Auto Drain)

Specifications

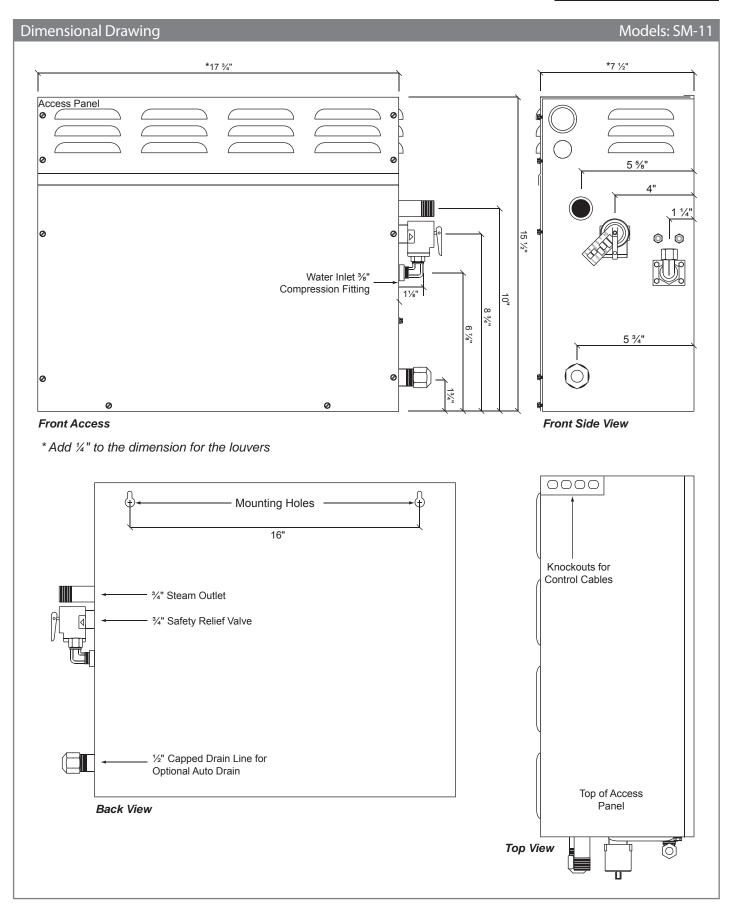

STEANIST[®] East Coast Office: 25 E. Union Ave., East Rutherford, NJ 07073 • Tel: 800-577-6478 • Fax: 201-933-0746 West Coast Office: Tel: 800-355 (172) 5

West Coast Office: Tel: 800-355-6478 • Fax: 661-940-1617