



135-125
Alto™

Elongated Front, Vitreous China,
Two-Piece Toilet

Features

- Contemporary design
- Superior boxed rim, siphon jet SmartFlush™ technology
- 1.6 gpf / 6.0 lpf low water consumption
- Two-inch glazed trapway
- 14" Rough-in
- Large 8-1/16" x 9-5/16" water surface
- Available in White, Standard Colors: Biscuit, Classic Bone and Designer Colors: Black, Classic Silver
- Model 40 chrome plated plastic trip lever (Consult Price Book for additional finishes)
- Upgrade with a color-match SmartClose™ or Primo™ toilet seat
- Meets or exceeds ANSI/ASME A112.192 and A112.19.6
- Meets or exceeds Canadian Standards Association B45.0
- Outstanding protection — The Mansfield® limited lifetime warranty



Elongated Front



Model 135-125
Shown with SB1200
Primo™ toilet seat

Model No.	Description	Approx. Wt.
135-125	Elongated front, (1.6 gpf/6.0 lpf) two-piece toilet. 14" rough-in. Includes tank trim and chrome plated plastic trip lever. Less toilet seat and supply. Specify color.	78 lbs. (35.1 kg)
135	Elongated front, toilet bowl only. 12" rough-in. Less toilet seat. Specify color.	47 lbs. (21.1 kg)
125	Tank and cover only, with left hand, chrome plated, plastic trip lever. 14" rough-in. Less supply. Specify color.	33 lbs. (15 kg)
SB400	Elongated, SmartClose™ toilet seat.	5.5 lbs. (2 kg)
SB1200	Elongated, Primo™ toilet seat.	5.5 lbs. (2 kg)



135-125

Alto™

Elongated Front, Vitreous China, Two-Piece Toilet

Features & Upgrades

Three-Point Cushioned Tank-to-Bowl Connection

This assures perfect tank alignment in every direction. It permits fast, accurate, leakproof tank-to-bowl connections. Protects against tank breakage... can't be rocked loose... saves installation time. Furnished with brass nuts and bolts.




211 Flush Valve

The 211 flush valve provides 1.6 gpf – 6.0 lpf water conservation efficiency with non-corrosive, long-life dependability. It seals tight every time. Won't rust or corrode.



88 Anti-Siphon Ballcock

The 88 anti-siphon ballcock affords efficient toilet tank operation at high or low pressures. Adjustment screw allows water level adjustment without bending the float rod. Completely non-electrolytic and non-corrosive.



Add a Toilet Seat


With a simple touch, Mansfield's SmartClose™ toilet seat gently and quietly. Or upgrade your toilet with a popular Primo™ toilet seat. Made of durable, high impact, heavy-duty plastic. For all applications - Get More, Get Mansfield®.



Technical Information

Specifications

Material	Vitreous China
Water Pressure Range	20 to 80 P.S.I.
Flush System	SmartFlush™ Flushing Technology
Water Usage	1.6 gpf / 6.0 lpf
Water Surface Area	8-1/16" x 9-5/16"
Trap Diameter	2"
Trap Seal	2-5/8"
Rough-in	12" (14" Option)
Shipping Dimensions	Model 135 27-1/4" x 14-7/8" x 15-1/2" (692 mm x 378 mm x 394 mm) Model 125 20" x 11" x 14-3/4" (5018 mm x 280 mm x 375 mm)
Shipping Weight	Model 135 - 46.9 lbs (21kg) Model 125 - 36.1 lbs (16 kg)
Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

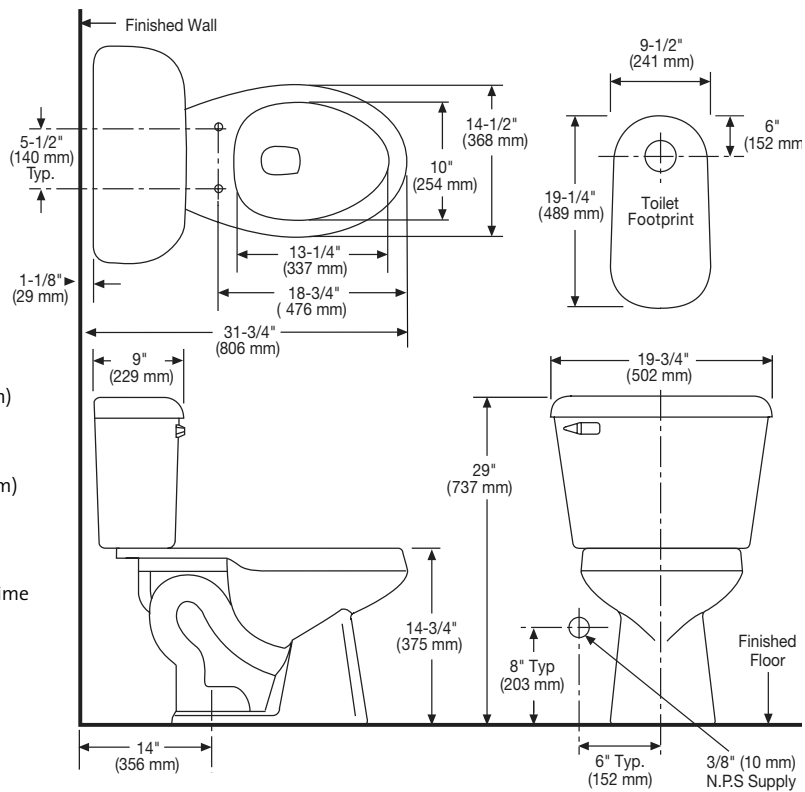

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet or exceed, ANSI/ASME A112.19.2, standards and CSA B45 standard, and other state and local codes.

NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

