Z84300-XL SERIES
AQUASPEC SINK FAUCETS

✓ Z843M1CSRC

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

TECHNICAL INFORMATION

MAXIMUM PRESSURE: 125 PSI
MAXIMUM TEMPERATURE: 160°F
HANDLE NUT TORQUE: 15-20 FT - LBS.
CARTRIDGE STYLE: QUARTER TURN CERAMIC DISK

INSTALLATION INSTRUCTIONS

1. 1/2_IP nipple should protrude 3/8_from the wall on 8_centers. Supply pipes should be secured to support the faucet.

2. Apply pipe sealant to 1/2_threads of supply pipe and screw supply arm assembly (Item #2) onto pipe. Postion supplies so that the body connections end up at 8" centers on a horizontal plane.

3. Insert sink faucet body (Item #1D) to supply arms, placing gasket (Item #2A) between body and supply arm.

4. Assemble spout to body using hardware.

5. Install wall brace by screwing the support rod into the threaded spout connection. Adjust the support rod to desired length and secure to finished wall using the two wood screws provided.

NOTE: Support for finished wall is recommended where wall brace mounts for maximum support.

6. Turn water supply ON and operate faucet, checking for leaks.

7. It may be necessary to shut water OFF and remove cartrridges to clean supply lines. Cartridges can be removed by first removing the handles. Color indexes can be removed by inserting a pin into the hole on the underside of the handle. After the handles have been removed, unscrew the handle nuts and pull out the cartridge.

8. Replace cartridges in body and hand tighten handle nuts. Place handles on the cartridge stem and locate them as desired. Tighten handle nuts.

9. Replace handle screws and color index button.

10. If necessary, install aerator onto spout and hand tighten. It may be necessary to unscrew and clean aerator at start-up.

CAUTION-FOR INSTALLATION WITH ATMOSPHERIC VACUUM BREAKERS (AVB'S).
THIS DEVICE SHOULD NEVER BE USED IN INSTALLATIONS THAT ARE UNDER CONTINUOUS PRESSURE WHEN INSTALLED WITH SPOUTS HAVING ATMOSPHERIC VACUUM BREAKERS (AVB'S). THEREFORE, NEVER PLACE A SELF-CLOSING, SHUT-OFF VALVE DOWNSTREAM OF AN AVB.

SERVICE INSTRUCTIONS

1. Your Zurn Aquaspec faucet is furnished with integral supply stops to provide a complete shut-off of the water supply. Turn screw stops into body using 5/16" hex key wrench until water shuts off completely. Turn stop no more than three (3) complete turns to activate water flow.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
⚠ADVERTENCIA: C®ncer y da¿o reproductivo - www.P65Warnings.ca.gov
⚠AVERTISSEMENT: Cancer et effets n¶fastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Light Commercial
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 XPh. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 XPh. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 5/9/2018
C.N. No. 140014
Form No. CF1576

Z84300-XL SERIES
AQUASPEC SINK FAUCETS

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

MAINTENANCE

1. Your Zurn Aquaspec faucet has a highly polished Nickel Chrome plated finish. Clean with soap and water or a mild cleaner which is safe for chrome plating. Do Not use acids or toilet bowl cleaner as they will damage the finish.


2. Aquaspec faucets contain ceramic disc cartridges which require no maintenance. To remove the cartridge, shut the water off, loosen the handle nuts and pull up on the cartridge.

REPLACEMENT PARTS


Cold Water Cartridge	59517005
Hot Water Cartridge	59517006
Index Buttons	G60500


Z843M1-XL PICTURED

SWING SPOUT CONFIGURATION



RIGID SPOUT CONFIGURATION



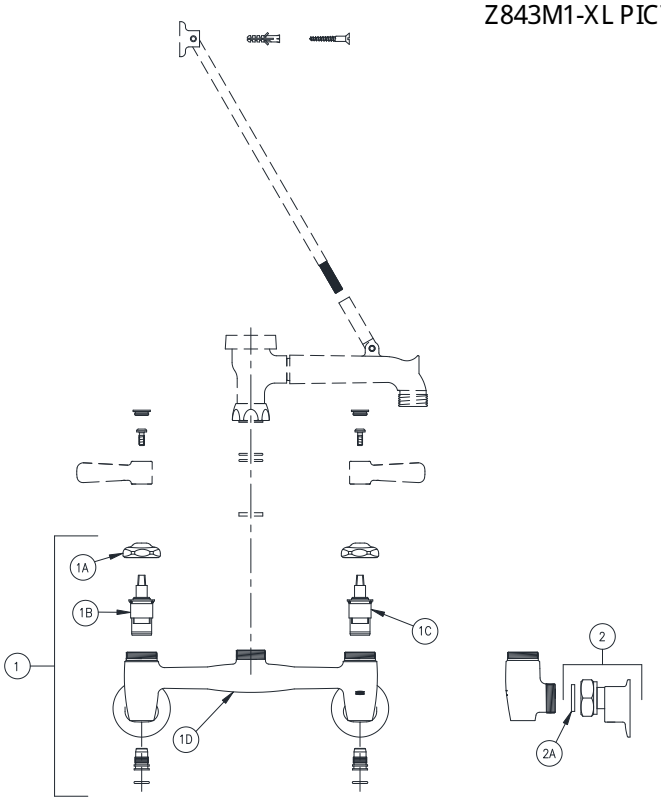


Z84300-XL Parts List			
Item	Part No.	Description	Qty
1	G67998	Sink Body Assembly XL	1
1A	59440001	Handle Nut	2
1B	59517005	Short Cold Cartridge XL	1
1C	59517006	Short Hot Cartridge XL	1
1D	N/A	Sink Body XL	1
2	G67882	Short Supply Arm Assembly	2
2A	59748001	Gasket	2

Zurn Industries, LLC | Light Commercial
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 XPh. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 XPh. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 5/9/2018
C.N. No. 140014
Form No. CF1576

SINK FAUCET

Z843M1-XL Parts List

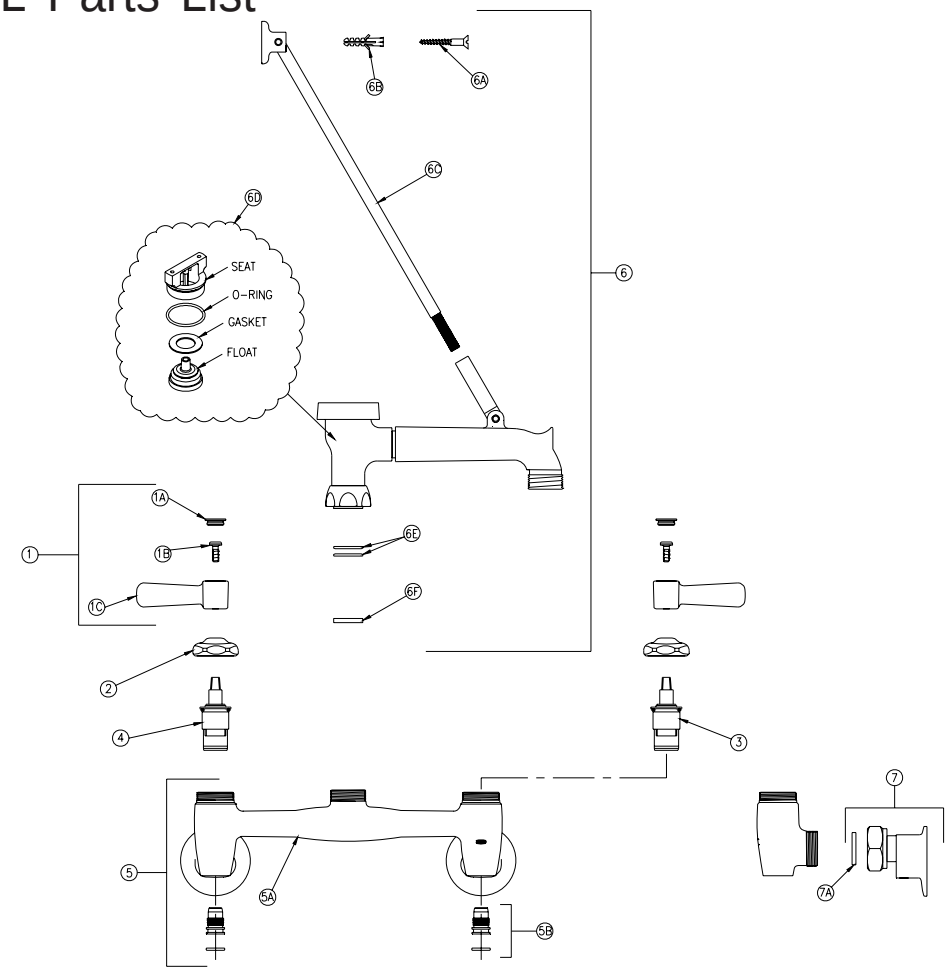

Item	Part Number	Description	Qty.
1	G60501	2-1/2" [64mm] Vandal-Resistant Metal Lever Handles	1
1A	G60500	Hot/Cold Color-Coded Indexes	1
	59454001	Hot Index	1
	59454002	Cold Index	1
1B	62464001	10-32 Screw	2
1C	59487001	Lever Handle	2
2	59440001	Handle Nut	2
3	59517005	Short Cold Cartridge XL	1
4	59517006	Short Hot Cartridge XL	1
5	66168005	Sink Body Assembly XL	1
5A	66156005	Sink Body XL	1
5B	G67978	Stop Plug Assembly XL	2
	92913002	Stop Plug XL	1
	58155013	O-Ring	1
6	G67945	5-3/4" 'M' Vacuum Breaker Spout Assembly XL	1
6A	62358001	Flat Head Wood Screw	2
6B	62359001	Plastic Anchor	2
6C	92377001	Wall Bracket/Rod Assembly	1
6D	62301001	Vacuum Breaker Repair Kit	1
6E	58155018	O-Ring	2
6F	59436001	Spacer Washer	1
7	G67882	Short Supply Arm Assembly XL	2
7A	59748001	Gasket	2

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733
Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

AquaSpec® is a registered trademark of Zurn Industries, LLC
©2010 Zurn Industries, LLC

Rev. Date: 8/24/10 C.N. No. 126817
Form No. CF1484 Product No. Z843M1-XL