

SCLI

The SCLI is the best fixture for applications that require an exit sign and a set of emergency lights. Combining the two safety lighting fixtures satisfies two fire code requirements.

- Combines two emergency fixtures into one unit
- LED technology consumes less than 5 watts electricity
- Push-to-test button with LED charging indicator
- Works for single and double face applications

HOUSING 5VA flame retardant, UV stabilized poly-carbonate in white, black or gray finish. High impact resistant,

ILLUMINATION Two fully adjustable 5.4 watt, glare-free lamp heads. Smooth thermoplastic reflector and plastic lens for optimal light distribution. Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination.

ELECTRICAL Dual 120/277V voltage. Charge rate/power on LED indicator light and push-to-test switch for mandated code compliance testing. LVD (low voltage disconnect) prevents battery from deep discharge.

TRANSFER/CHARGING CIRCUITRY Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY 6V maintenance-free, rechargeable sealed lead acid battery.

MOUNTING EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

OPTIONS **SD:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and Life Safety Codes. **REM:** Remote capacity option available. **HTR:** Optional internal heater for cold temperature applications.

LISTINGS Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA and Local and State Codes. UL Listed for damp locations (20°C – 40°C). Certified to CEC under Title 20 Regulations.

WARRANTY 5 year warranty on all electronics and housing. Battery pro-rated for two years.



SCLI Series Ordering Configuration


SERIES	FACES	LETTER COLOR	HOUSING COLOR	OPTIONS	ACCESSORIES
SCLI	2 = Universal Single/Double face	R = Red G = Green	W = White B = Black	HTR = Internal Heater ¹ REM = Remote Capacity SD = Self Diagnostic	PS1 = Vandal Shield SW2 = Wire Guard

¹Not available with RC units.

REM Series Ordering Configuration

SERIES	NUMBER OF HEADS	OPTIONS
REM = Remote 5.4W Incandescent Head	1 = One 2 = Two	WP = Weatherproof 5 = 5.4W lamps 7 = 7.2W lamps 9 = 9W lamps

Dimensions

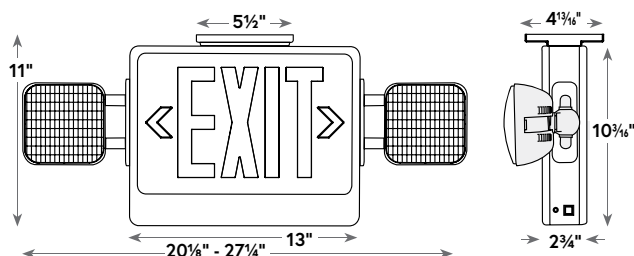

Accessories



PS1



SW2

Electrical Data

Model	Input Wattage (W)		Input Amps (A)	
	120V	277V	120V	277V
SCLI SD	10	10	0.10	0.05
SCLI RC SD	15	15	0.12	0.06

Remote Lamp Compatibility

Model	Battery	Remote Capacity	Compatible Remote Head Family	
			REM	
			6V	12V
SCLI RC	6V	11W	X	