

For Residential and Commercial Applications


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

G2PR19 1/4 Turn Angle Stop – CPVC x Compression

Use: For use in potable water distribution systems. Not intended for recirculating systems that produce continuous use temperatures above 115° F. For those applications, use BrassCraft's KT series ball stop

Design Features:

- **One-Piece shut-off mechanism** provides smooth on-off operation without freeze ups even after long periods of non-use
- **Positive 1/4 turn shut-off**
- **Full-flow operation** with no waterway obstructions
- **Corrosion-resistant handle** is plated in an attractive chrome finish
- **Machined one-piece brass body** provides strength, durability and long-lasting performance
- **Easy-to-remove handle** with screw attachment protects accidental operation during rough-ins
- **100% leak tested**

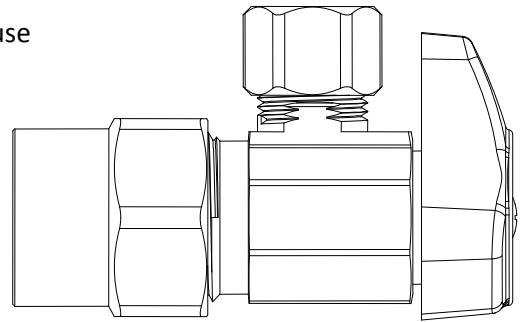

Patents 7,178,786
7,036,793 &
Design Patent 462,111

Operating Specifications:

Temperature: 40° - 140° F

Pressure: 125 psi maximum



MATERIAL SPECIFICATIONS	
Valve Body	C36000 brass
Stem Barrel	Santoprene
Stem Shaft	Glass-filled polypropylene
Stem O-ring	EPDM rubber
Handle	Chrome-plated zinc die cast
Screw	Zinc-plated steel
CPVC Insert	CPVC 23447-B
CPVC Washer	EPDM rubber
CPVC Nut	C36000 brass
Compression Sleeve	C36000 brass
Compression Nut	C36000 brass

Standard Part Listing:

- ☐ G2PR19 C 1/2" Nom. CPVC x 3/8" OD Compression, chrome plated
- ☐ G2PR19 CD 1/2" Nom. CPVC x 3/8" OD Compression, chrome plated, carded

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

400.56 G2PR19 1/4 Turn Angle Stop – CPVC x Compr Rev. 01/11

BrassCraft®

© 2011, 2010 Brass-Craft Mfg.

G2PR19 1/4 Turn Angle Stop – CPVC x Compression

Standard Part Listing (con't):


- ☐ G2PR19 C1 1/2" Nom. CPVC x 3/8" OD Compression, chrome plated, window tray
- ☐ G2PR19 R 1/2" Nom. CPVC x 3/8" OD Compression, rough brass
- ☐ G2PR19L1 CB 1/2" Nom. CPVC x 3/8" OD Compression, less outlet nut, chrome plated, bulk

Compliant Part Listing:

Currently not available in compliant brass, please contact your BrassCraft sales representative for more information.

PART DIMENSIONS (Inches)

Model	DIM. A	DIM. B
G2PR19	1.06	2.65
G2PR19L1	0.77	2.65

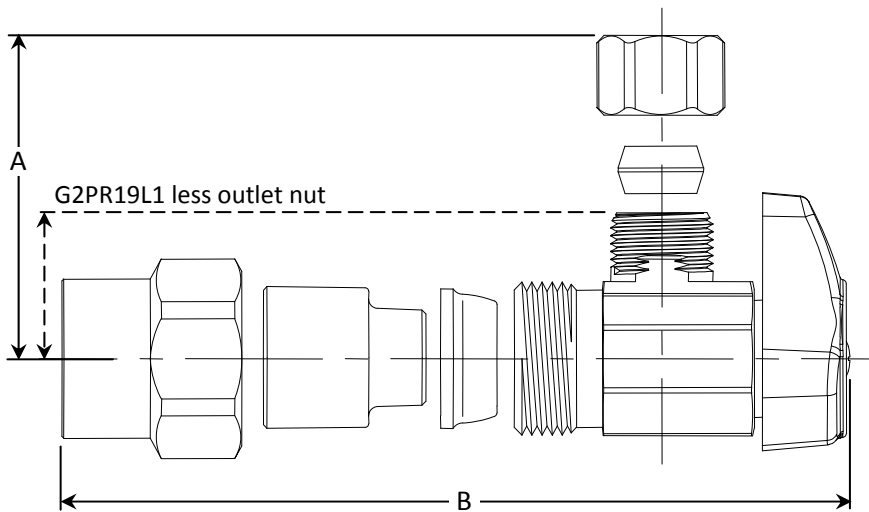

Listings & Certifications:

- IAPMO listed to ASME A112.18.1-05 / CSA B125.1-05 (File # 0645)
- CSA listed to ASME A112.18.1-05 / CSA B125.1-05 (File # 204593)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft