For Residential and Commercial Applications

Job Name:	Engineer/Architect:
Job Location:	Wholesaler:
Submittal Date:	Contractor:

G2PR14X 1/4 Turn Straight Stop – CPVC x Compression

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use temperatures above 115° F. For those applications, use our KTTM series ball stop.

Design Features:

- One-piece shut-off mechanism provides smooth on-off operation
- Positive 1/4 turn shut-off
- **Corrosion-resistant handle is** plated in an attractive chrome finish
- Machined one-piece brass body provides strength, durability, and long-lasting performance
- **Easy-to-remove handle** with screw attachment helps protect against accidental operation during rough-ins
- 100% leak tested



Operating Specifications:

40°-160° F Temperature:

Pressure: 125 PSI maximum


MACHINED AND
HED.
MB/FS
W THE USA



MACHINEU AND	
), — , , , , , , , , , , , , , , , , , ,	
¥EMB _L	
W THE USA	
· THE OS	

STOP MATERIAL SPECIFICATIONS		
Body	Brass, plated	
Stem Barrel	TPE	
Stem Shaft	Glass-filled polypropylene	
Stem O-ring	Rubber	
Handle	ABS, plated or zinc die cast, plated	
Screw	Steel, zinc plated	
CPVC Insert	CPVC	
CPVC Washer	Rubber	
CPVC Nut	Brass, plated	
Compression Sleeve	Brass	
Compression Nut	Brass, plated	

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
G2PR14X	1.14	2.65

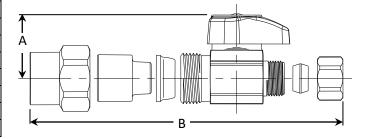


Part Listing:

Ш	G2PR14X C	1/2" nom CPVC x 3/8" OD compression, chrome plated
	G2PR14X CD	1/2" nom CPVC x 3/8" OD compression, chrome plated, carded
	G2PR14X C1	1/2" nom CPVC x 3/8" OD compression, chrome plated, window tray

Listings & Certifications:

■ IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)







This specification and all information contained herein is the confidential and exclusive property of