





VALVES

1/2" Pressure Balanced Shower Valve

OS36TPR

SPECIFICATIONS AND DIMENSIONS


5.8 GPM @ 50 PSI

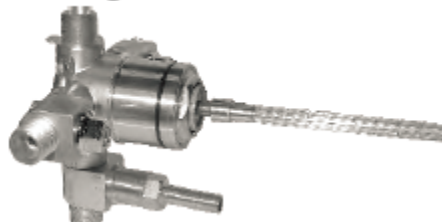

| | |
|----------------------------|--|
| Minimum operating pressure | 20 psi (140Kpa) |
| Maximum operating pressure | 125 psi (1000 Kpa) |
| Max hot water inlet temp: | 180 °F / 80°C |
| Hot and cold water inlets | 1/2" female |
| Shower outlet | 1/2" female |
| Tub outlet | 1/2" male NPT |
| Flow capacity | 5.8 USGPM@ 50 psi 22 l/min@ 345 Kpa |

Codes and Standards

- ASME A112.18.1/CSA B125, 1-11
- IAPMO US AND CANADA

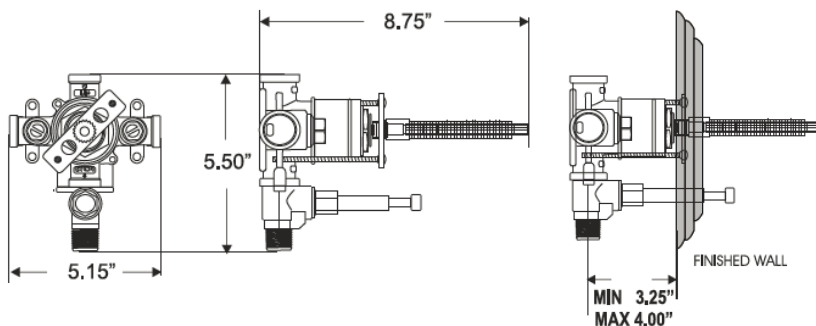

ALTMANS RESERVES THE RIGHT TO
MODIFY AND CHANGE SPECIFICATIONS
AT ANY TIME. PLEASE VERIFY DIMEN-
SIONS PRIOR TO INSTALLATION

Features and Benefits

- Brass Construction
- 5.8GPM@50PSI
- 1/2 Inch Valve