



see what Delta can do™

SHOWER HEAD

■ Single Spray Setting Shower Head

STANDARD SPECIFICATIONS

- Maximum 1.5 gpm @ 80 psi, 5.7 L/min @ 550 kPa for 52653-PK
- Maximum 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa for 52667-PK
- 2 1/4" diameter spray face: 52653-PK
- 2 1/2" diameter spray face: 52667-PK

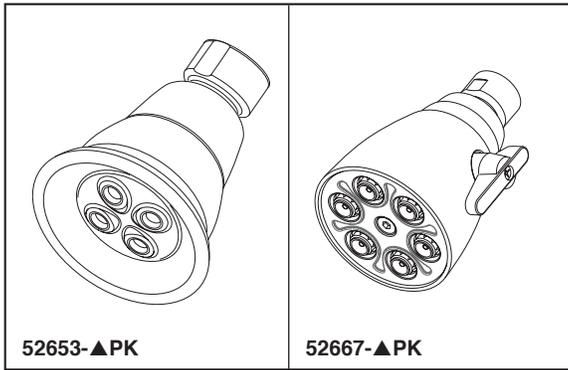
WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - Applies to 52653-PK & 52667-15-BG only





Submitted Model No.: _____

Specific Features: _____

52653-▲PK 1.5 GPM Shower Head




High-Efficiency
Spray

52667-▲PK 2.5 GPM Shower Head
52667-▲15-BG 1.5 GPM Shower Head



Adjustable
Full Spray

▲ Designate proper finish suffix