

CADDY ROD LOCK

Threaded Rod Mounting System



CADDY ROD LOCK

Prefabrication is the process that allows for parts to arrive at a job site preassembled. More and more, contractors are leveraging the efficiencies provided by prefabrication, including:

- cost savings
- better time management
- safer installations

These benefits apply to a variety of projects, regardless of size or scope.

Historically, complex assemblies were built on-site at the location where they were to be mounted. Installers, therefore, required constant access to the job site in order to keep a project moving according to schedule.

With prefabrication, assembly is completed in a space devoted to the production and storage of components. By completing these tasks off-site, contractors can mass-produce assemblies used in similar projects, and on-site installers can focus exclusively on mounting the finished product.

Today, contractors can leverage a range of emerging solutions that allow for new and unique ways to prefabricate. While the process may require a new approach to processes such as purchasing, creating and installing assemblies—as well as hardware used during the mounting of a finished piece—prefabrication yields countless benefits.

In today's competitive construction market, contractors must provide quality work while lowering labor costs and project time and adhering to safety standards.


CADDY ROD LOCK "Push-to-Install" technology allows prefabrication of complex assemblies off-site or on the ground. Large assemblies can simply then be lifted and locked into place.

The process requires less time on the job site, allowing for more tasks to be completed in a controlled off-site facility. As a result, prefabrication reduces installation costs, enables schedule flexibility and improves safety.

While results may vary based on specific product and application, studies have shown the unique features of the CADDY ROD LOCK system help reduce the installation time of threaded rod by up to **52 percent** compared to conventional fasteners.

“Prefabrication is vital to this project both to deal with the delays, and also to help manage the materials. [...] And, we expect labor savings by moving work into the controlled environment of the shop.”

Will Vranich - Smith & Oby
(United States)



"Push-to-install" Technology

For both contractors and their clients, prefabrication offers a host of benefits—chief among these is time savings. In fact, prefabrication makes schedule compression possible by as much as 18 percent. While this includes the ability to complete a job more quickly, other time-related perks should be noted.

More Lead Time

Contractors can plan for projects sooner, and installers can prepare pieces in advance at the prefab shop. They can then quickly install assemblies, requiring less time at the job site.

Less Downtime


Workers can fill gaps in their schedules with projects in the prefab shop. Contractors and installers can rely on more consistent and efficient work schedules.

Schedule Flexibility

To combat restrictions of job site schedules or city ordinances, a majority of prefab work can be completed off-site. Prefab shops can run anytime day or night, allowing for quicker turnaround and enabling the contractor to have greater control over the team's project schedule.

Internal studies have indicated time savings of up to 69% with one person installing a 2-tier trapeze with CADDY ROD LOCK Strut (compared to traditional installation).

STRUCTURE

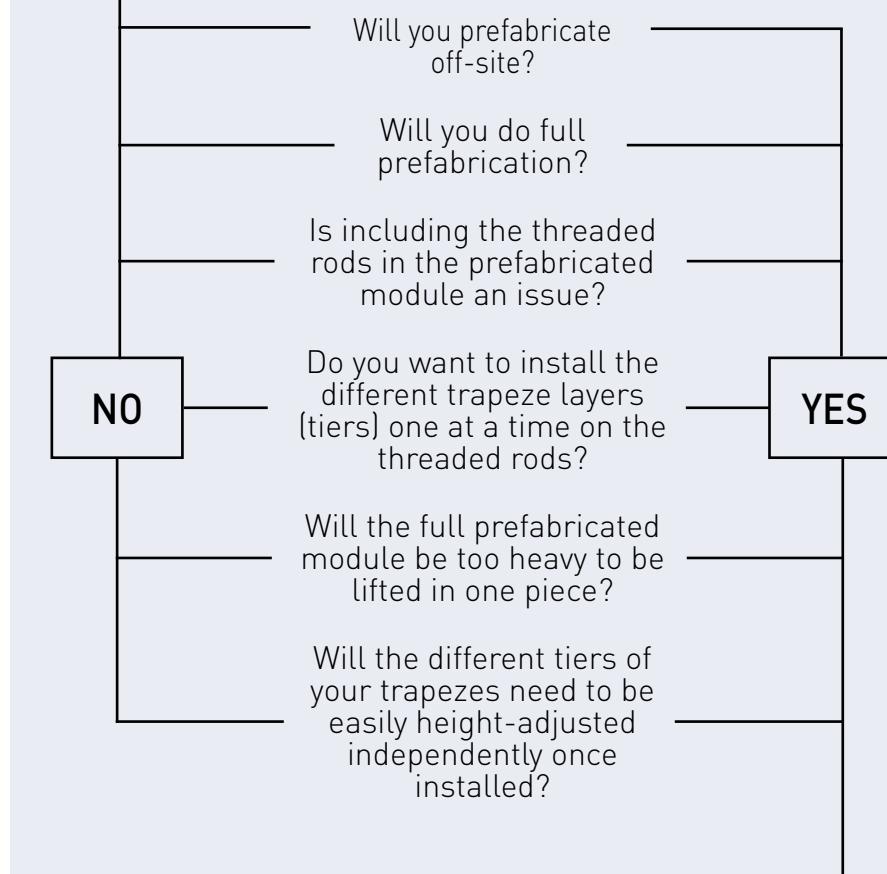

VS. LOAD





Structure vs. Load

Having the right hardware can make a prefabrication assembly even more efficient during installation.

Structural attachments are ideal for on-site (partial) prefabrication projects, reducing the time spent in the air. Additionally, they are height-adjustable at the structure, but different trapezes can be more difficult to readjust. These attachments are most often used on heavier modules.

Supports are ideal for off-site (full) prefabrication projects. They are height-adjustable at the load, and the height for each tier can easily be altered. These are lighter modules, offering easier transportation. Additionally, they allow for prefab using fire-rating structural attachments

Installation at Structure	CADDY ROD LOCK Product	Beam Clamp (1/8" - 3/8")	Beam Clamp, Thick Flange (3/8" - 3/4")	Anchor Screw	Bar Joist Hanger	Metal Decking Preset Anchor	Plywood Form Preset Anchor	L-Bracket	Coupler	Coupler with Rod		
		Page	14	14	15	15	16	16	18	17	17	
Application												
Is the assembly being attached to concrete - wall?												
Is the assembly being attached to concrete - ceiling (pre-pour)?												
Is the assembly being attached to concrete - ceiling (post-pour)?												
Is the assembly being attached to I-Beam or flange?												
Is the assembly being attached to Bar-Joist?												
Is the assembly being attached to existing/already installed threaded rods or male anchors?												
Is the assembly being attached to existing/already installed female anchors?												



Conduit / Pipe Rack Installation

Known Rod Spacing

When installing to a specific rod spacing, the best option is CADDY ROD LOCK Strut. The conduit runs can be easily lifted and locked into place using CADDY ROD LOCK "Push-to-Install" technology. It is available for widths of 16-52", and ordered in advance to the desired pre-cut length – eliminating the need for handling long lengths of strut and all the cumbersome activities associated to it.

Unknown Rod Spacing

To install with unknown rod spacing, contractors should use the CADDY ROD LOCK Telescoping Strut Replacement. The part has CADDY ROD LOCK hardware at each end of the bar, but can telescope between 12.5-20", and eliminates the need for cutting strut.

Retrofitting

When prefabricating retrofit runs of conduit, attach conduit to a TSR1220R. This retrofit version of the Telescoping Strut Replacement can be placed above an existing trapeze and held in place with four CADDY SN Nuts.

Conduit / Pipe Rack Installation	CADDY ROD LOCK Product	Channel Nut	Strut Nut	Strut	Telescoping Strut Replacement
					
Page	22	23	21	20	
Application		   			
Out-of-the-box support				✓	✓
Accommodates strut with its open side facing down	✓				
Accommodates strut with its open side facing up	✓	✓	✓	✓	
Accommodates large variances in threaded rod location	✓				✓
Height adjustable		✓	✓	✓	✓
Ability to lock the "push-to-install" system		✓	✓	✓	✓



CADDY

"As a specialist for drainage pipe systems we count on CADDY ROD LOCK when it comes to install roof drainage systems. I, as a project leader, appreciate most the time- and with that the cost-savings achieved thanks to the use of "CADDY ROD LOCK."

Karl Konarzewski - DWD Group GmbH (Germany)



The spacing between conduits across the channel needs to be the same so that they meet up with each other when the individual runs are installed. It is recommended that installers use custom wooden jigs with notches at the spacing for each piece. They can be easily made on the jobsite with pieces of wood and customized for individual situations.

The channel is laid next to the jig and the conduit is attached to it. A variety of CADDY fasteners can be used to hold the conduit to the channel. This process is repeated based on the number of runs needed for the total length of conduit on the project.

The threaded rod is attached at structure in advance.




Light Installation

CADDY ROD LOCK Product	Channel Nut	Strut Nut
		
Page	22	23
Application	 	
Accommodates strut with its open side facing down	✓	✓
Accommodates large variances in threaded rod location	✓	
Height adjustable		✓
Ability to lock the "push-to-install" system		✓

Prefabricated Module Installation

CADDY ROD LOCK Product	L-Bracket	Channel Nut	Strut Nut
			
Page	18	22	23
Application			
Compatible with strut frame		✓	✓
Compatible with non-strut frame	✓		✓
No extra hardware needed		✓	✓
Accommodates strut with its open side facing down		✓	
Accommodates large variances in threaded rod location	✓	✓*	✓*
Height adjustable	✓		✓
Ability to lock the "push-to-install" system	✓		✓

* For non-strut frame only. Holes must be drilled in frame.

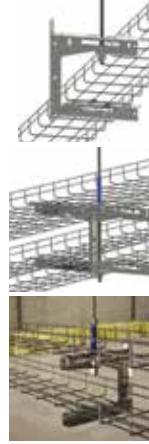Cable Tray Installation	CADDY ROD LOCK Product	L-Bracket	Wire Basket Support Clip	Universal Tray Support	Strut	Telescoping Strut Replacement	Channel Nut	Strut Nut
								
	Page	18	26	27	21	20	22	23
	Application	 		 				
	Basket tray		✓	✓	✓	✓	✓	✓
	Perforated tray	✓		✓	✓	✓	✓	✓
	Cable ladder	✓			✓	✓	✓	✓
	Lay-in cable / wire			✓				
	Multi-tier assemblies	✓	✓	✓	✓	✓	✓	✓
	Out-of-the-box support		✓	✓	✓	✓		
	Material cost independent of tray width	✓	✓			✓		
	No restriction on tray width	✓	✓		✓		✓	✓
	Standard version available for using CADDY ROD LOCK technology at the structure	✓		✓		✓		
	Accommodates 1/2" threaded rod				✓			
	Accommodates strut with open side facing down						✓	✓
	Accommodates large variances in threaded rod locations					✓	✓	✓
	Height adjustable	✓	✓	✓	✓	✓		
	Ability to lock the "push-to-install" system	✓	✓	✓	✓	✓		





Air Duct Installation

CADDY ROD LOCK Product	Channel Nut	Strut Nut	Bottom-Mount Duct Bracket	Bottom-Mount Duct Bracket, Narrow	Strut	Telescoping Strut Replacement
Page	22	23	19	19	21	20
Application						
Out-of-the-box support			✓	✓	✓	✓
Material cost independent of duct width			✓	✓		✓
Material cost independent of duct height						
Recognized by SMACNA			✓	✓		
Support duct wider than 60" without engineering analysis	✓	✓			✓	
Install hanger to the duct on the ground		✓	✓	✓		
Does not penetrate the duct with screws	✓	✓			✓	✓
Accommodates strut with open side facing down	✓					
Accommodates large variances in threaded rod locations	✓		✓			✓
Height adjustable		✓	✓	✓	✓	✓
Ability to lock the "push-to-install" system		✓	✓	✓	✓	✓


Air Duct Installation

Rectangular duct can be prefabricated two ways: attaching directly to the duct or attaching the duct to strut. In both situations, CADDY ROD LOCK "push-to-install" technology enables easy installation of preassembled pieces.

When attaching directly to the duct, installers should screw CADDY ROD LOCK Duct Brackets into the side of the duct. Threaded rod should be attached at structure, and the duct assemblies are easily lifted and locked into place.

In strut mounted applications, duct is attached to CADDY ROD LOCK Strut and the strut is pushed onto the threaded rods.



Goal-post Installation	CADDY ROD LOCK Product	SNSW Flanged Nut	Nut	Strut	Telescopic Strut Replacement	Channel Nut	Strut Nut
							
Page	25	23	21	20	22	23	
Application							
Out-of-the-box support			✓	✓			
Material cost independent of goal-post length				✓			
No loose hardware when installed onto strut channel			✓	✓	✓	✓	✓
Accommodates strut with open side facing down	✓	✓				✓	
Accommodates large variances in threaded rod locations				✓	✓		
Height adjustable	✓	✓	✓	✓			✓
Ability to lock the "push-to-install" system			✓	✓			✓
"Push-to-install" system		✓	✓	✓	✓	✓	✓
Easy and fast uninstallation	✓						



Retrofit Installation	Product	TSR1220R + SN Nuts	ISSP + SN Nuts
			
Page	24	24	
Application			
Accommodates strut with open side facing down	✓		
Accommodates strut with open side facing up	✓		✓
Suitable for trapeze with threaded rod >20"			✓
Material cost independent of trapeze length	✓		
Height adjustable	✓		✓
Tool-free	✓		




CADDY ROD LOCK Beam Clamps

- Prefabricated assemblies easily lift and lock into place, helping to save time and money
- Easy "push-to-install" design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Lock nut can be finger tightened, locking the rod in place
- Works with slightly damaged threads and minor burrs on the threaded rod
- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI®/MSS-SP-58 (Type 19 and 23)

Fast, easy solution for attaching threaded rod assemblies to metal beam structures.



CADDY ROD LOCK Beam Clamp

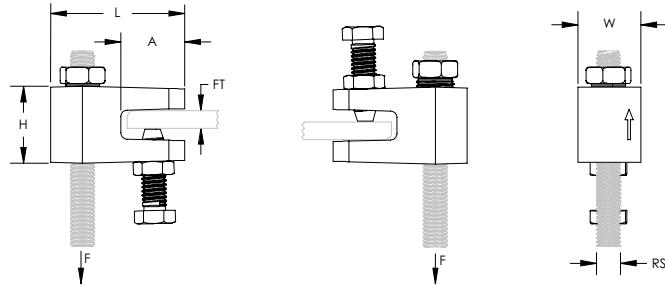

"I would never buy a normal beam clamp again after seeing this. It is so much faster to install this."

Sean Daley - Total Electric
(United States)



Material: Cast Iron
Finish: Electrogalvanized


Part Number	Rod Size RS	Flange Thickness FT	Height H	Length L	Width W	A	Static Load 1 F1	Static Load 2 F2
CRLB37EG	3/8"	1/8" - 3/8"	1 3/16"	2.06"	1"	0.98"	250 lb	500 lb

For use on plain and electro zinc plated hardware only.

Static Load 1 represents 1/8" to 3/16" (3 mm to 5 mm) flange thickness. Static Load 2 represents 1/4" to 3/8" (6 mm to 10 mm) flange thickness.

Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the I-beam and then an additional 1/2 turn added.

CADDY ROD LOCK Beam Clamp, Thick Flange

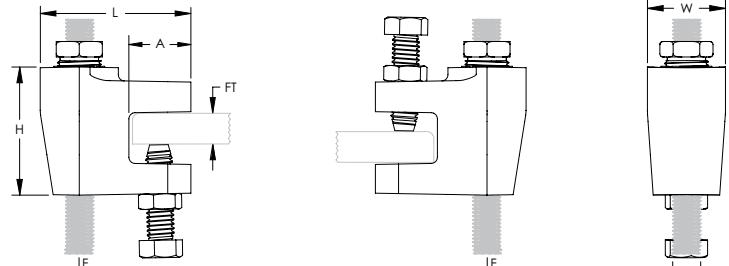

Material: Cast Iron
Finish: Electrogalvanized

Part Number	Rod Size RS	Flange Thickness FT	Height H	Length L	Width W	A	Static Load 2 F2
CRLB50EG	1/2"	3/8" - 3/4"	2.1"	2.4"	1.3"	1"	1,100 lb

For use on plain and electro zinc plated hardware only.

FM® Approved in the bottom mount orientation only.


Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the I-beam and then an additional 1/2 turn added.



CADDY ROD LOCK Bar Joist Hanger

- Easily installs from underneath the bar joist
- Plastic protection cap prevents dirt or structural coatings from obstructing the "push-to-install" mechanism
- Prefabricated assemblies easily lift and lock into place, helping to save time and money
- Easy "push-to-install" design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Works with slightly damaged threads and minor burrs on the threaded rod

Fast, easy solution for attaching threaded rod assemblies to bar joists.

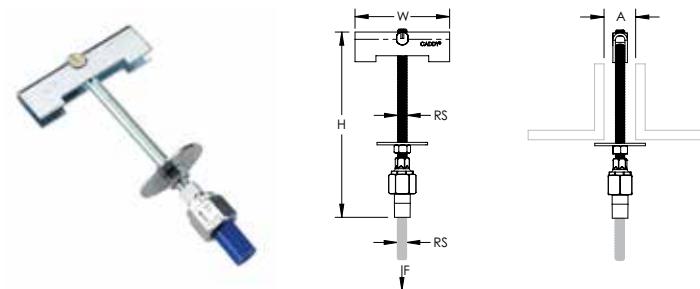

Material: Steel

Finish: Electrogalvanized

Static Load Safety Factor: 3.5:1



Part Number	Rod Size RS	Height H	Width W	A	Wrench Size 1	Wrench Size 2	Static Load F
CRLJ37EG	3/8"	7.4"	3.7"	5/8" - 1 1/4"	9/16"	15/16"	1,000 lb

Wrench Size 1 represents hex nut size used to tighten to bar joist. Wrench Size 2 represents CADDY ROD LOCK hex nut size.

CADDY ROD LOCK Anchor Screw

- For use with concrete and solid brick
- Prefabricated assemblies easily lift and lock into place, helping to save time and money
- Works with slightly damaged threads and minor burrs on the threaded rod

Push-to-install threaded rod support for concrete or brick.



Material: Steel
Finish: Electrogalvanized

Part Number	Rod Size RS	A	B	C	Drill Bit Diameter	Drill Hole Depth	Static Load F
CRLA37EG	3/8"	2 7/8"	1 1/4"	7/8"	5/16"	2"	652 lb

For use on plain and electro zinc plated hardware only.

Tested in 3,000 psi (20.68 MPa) concrete and soft or hard wood with a 9/32" pilot hole.



CADDY ROD LOCK Preset Anchors


- Eliminate overhead drilling into building structure – CADDY ROD LOCK Preset Anchors are cast in place
- Easy “push-to-install” design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Works with slightly damaged threads and minor burrs on the threaded rod
- Prefabricated assemblies easily lift and lock into place, helping to save time and money
- Plastic flange acts as insert locator when the forms are removed
- CADDY ROD LOCK Preset Anchors have a pending evaluation to AC446, Acceptance Criteria for Headed Cast-In Specialty Inserts in Concrete

Preset anchors for concrete that allow complex prefabricated threaded rod assemblies to be easily pushed into place.



CADDY ROD LOCK Metal Decking Preset Anchor

- Set in place through a drilled hole in the metal decking before the concrete is poured
- Can be used in lower and upper flute installations

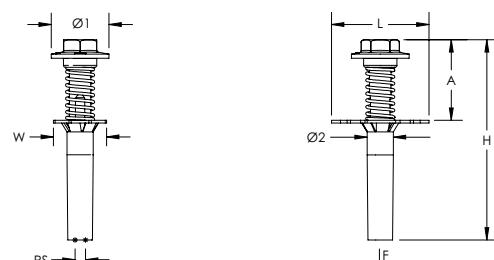


Material: Steel
Finish: Electrogalvanized

Part Number	Rod Size RS	Diameter 1 Ø1	Diameter 2 Ø2	Height H	Length L	Width W	A	Drill Bit Diameter	Static Load F
CRLM37EG	3/8"	1.65"	0.7"	5.6"	2.8"	1 1/2"	2.3"	3/4"	830 lb
CRLM50EG	1/2"	1.95"	0.8"	5.7"	2.8"	1 1/2"	2.4"	7/8"	830 lb

CADDY ROD LOCK Plywood Form Preset Anchor

- Nails hold the anchor in place during the pour and easily break off with a strike of a hammer once the plywood forms are removed

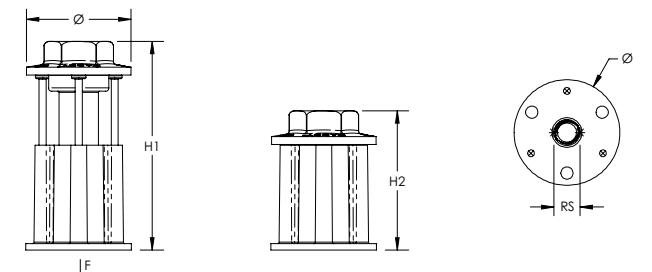

Material: Steel
Finish: Electrogalvanized


Part Number	Rod Size RS	Diameter Ø	Height 1 H1	Height 2 H2	Static Load F
CRLW37EG	3/8"	1.65"	3.2"	2.4"	1,407 lb
CRLW50EG	1/2"	1.90"	3.3"	2.5"	1,618 lb



CADDY ROD LOCK Coupler

- Joins two sections of threaded rod by an easy “push-to-install” mechanism
- Can be easily installed at the end of a threaded rod, or to any existing male thread
- Plastic protection cap prevents dirt or structural coatings from obstructing the “push-to-install” mechanism
- Prefabricated assemblies easily lift and lock into place, helping to save time and money
- Works with slightly damaged threads and minor burrs on the threaded rod

An ideal replacement for traditional threaded rod couplers in applications where traditional CADDY ROD LOCK structural attachments are unsuitable due to the application of structural coatings that would obstruct the push-to-install mechanism.



Material: Steel
Finish: Electrogalvanized
Static Load Safety Factor: 3.5:1


Part Number	Rod Size RS	Height H	Wrench Size 1	Wrench Size 2	Static Load F
CRLC37EG	3/8"	2.4"	1/2"	15/16"	1,000 lb

Wrench Size 1 represents hex size used to tighten to threaded rod from structure. Wrench Size 2 represents CADDY ROD LOCK hex nut size.

CADDY ROD LOCK Coupler with Rod

- Easily installs into any traditional structural threaded rod attachment
- Allows simple installation of threaded rod assemblies by an easy “push-to-install” mechanism
- Plastic protection cap prevents dirt or structural coatings from obstructing the “push-to-install” mechanism
- Prefabricated assemblies easily lift and lock into place, helping to save time and money
- Works with slightly damaged threads and minor burrs on the threaded rod

A coupler attached to precut lengths of threaded rod, allowing for installation in to any traditional threaded rod attachment including beam clamps, preset concrete anchors, and post drill concrete anchors.

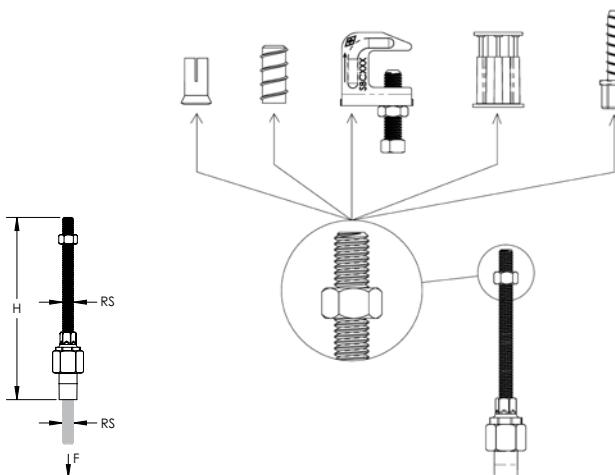

Material: Steel
Finish: Electrogalvanized
Static Load Safety Factor: 3.5:1

Part Number	Rod Size RS	Height H	Wrench Size 1	Wrench Size 2	Static Load F
CRLC37L1	3/8"	6.3"	9/16"	15/16"	1,000 lb

Wrench Size 1 represents hex nut size used to tighten to structural attachment. Wrench Size 2 represents CADDY ROD LOCK hex nut size.

CADDY ROD LOCK L-Bracket


- Easy “push-to-install” design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Prefabricated assemblies easily lift and lock into place, helping to save time and money
- Multiple attachment holes support the use of either self-drilling screws or bolts, offering installation options for concrete, wood, and steel structures
- Lock nut can be finger tightened, locking the rod in place
- Integrated adjustment nut enables fine tuning the system height up or down
- Extremely useful in tight spaces where wrenches are difficult to use
- Conforms with Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI®/MSS-SP-58 (Type 19 and 23)

A versatile solution that can be used as a **Structural Attachment** or as a **Load Attachment**:

- At Structure - Attach to concrete/wood beam or to a wall
- At Load - Attach to the side of cable ladder, perforated tray, prefabricated modules, etc.



Material: Cast Iron
Finish: Electrogalvanized

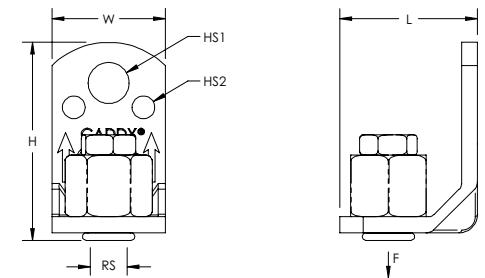

Part Number	Rod Size RS	Height H	Length L	Width W	Hole Size 1 (HS1)	Hole Size 2 (HS2)	Wrench Size	Static Load F
CRL37EG	3/8"	2.41"	1.7"	1.4"	0.51"	0.28"	11/16"	700 lb

Follow fastener manufacturer's recommended shear and pull-out strength when fastening to the structure. Fastener not included.

Install in accordance with applicable code.

CADDY ROD Duct Brackets

- Easy “push-to-install” design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Ready to use out of the box and eliminates the need for cutting and preparing sections of strut, angle iron, or strap
- Integrated adjustment nut enables fine tuning the system height up or down
- Lock nut can be finger tightened, locking the rod in place
- Ideal for modular assembly – allows attachment of brackets to sections of duct while safely on the ground
- Extremely useful in tight spaces where wrenches are difficult to use
- Includes self-tapping sheet metal screws to attach bracket to duct

Elegant solutions to facilitate pre-fabrication of rectangular duct while eliminating the need for strut.




CADDY ROD LOCK Bottom-Mount Duct Bracket

- Slotted holes in bracket allow for horizontal adjustment of the bracket relative to the duct




Material: Steel
Finish: Electrogalvanized

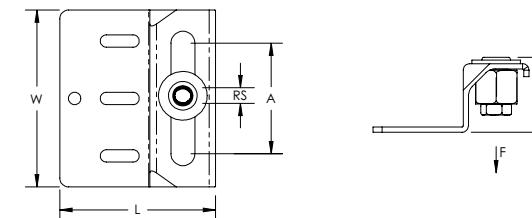

Part Number	Rod Size RS	Height H	Length L	Width W	A	Static Load F
CRL37BEG	3/8"	1.7"	3 1/2"	4"	2 1/2"	650 lb

CADDY ROD LOCK Bottom-Mount Duct Bracket, Narrow

- Non-slotted bracket allows for attachment after the final horizontal position of the duct is achieved



Material: Steel
Finish: Electrogalvanized

Part Number	Rod Size RS	Height H	Length L	Width W	Static Load F
CRL37BNNEG	3/8"	1.9"	4.1"	2.1"	1,400 lb



CADDY ROD LOCK Telescoping Strut Replacement

- Easy “push-to-install” design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Telescopes to the desired length and is locked in place by snapping closed a spring retainer clip
- Standard strut profile runs the entire length of the part, allowing most standard fittings to be placed anywhere between the rods
- Allows installers to prefabricate complex assemblies and quickly lift and lock them into place
- Lock nut can be finger tightened, locking the rod in place
- Allows for the quick creation, installation, and adjustment of multi-level trapeze assemblies
- Captive threaded nuts enable fastening to threaded rod supports without loose parts
- Integrated ruler displays space between hanger rods in inches and centimeters
- Supports up to six 2" (50 DN) conduits, six 2" (50 DN) water filled pipes at 10' (3 m) spacing, or up to 18" (450 mm) cable tray
- Conduit can be supported on the top and bottom, eliminating the need for double sided strut
- Conduit and pipe can be placed directly on the strut profile, saving vertical space in buildings with limited room for installation

Extremely fast and simple solution for multi-tiered trapeze installations. The Telescoping Strut Replacement is compatible with all of your favorite strut accessories.



Material: Steel
Finish: Pregalvanized

Part Number	Rod Size RS	Thickness T	A	B	C	D	E	Static Load 1 F1	Static Load 2 F2
TSR122038RL	3/8"	0.04"	12 1/2" - 20"	14" - 21 1/2"	1 5/8"	7/8"	1 3/8"	300 lb	200 lb

Static Load 1 represents a distributed load for 12" - 20" (300 - 500 mm) installations and a point load for 12" - 16" (300 - 400 mm) installations.



Static Load 2 represents a point load for 16" - 20" (400 - 500 mm) installations.



CADDY ROD LOCK Strut

- Allows for the quick creation, installation, and adjustment of multi-level trapeze assemblies
- Ready to use out of the box and eliminates the need for cutting and preparing sections of strut
- Easy “push-to-install” design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Integrated adjustment nut enables fine tuning the system height up or down
- Accommodates slight variances in rod-to-rod position of the trapeze
- No loose parts or special tools needed for installation
- Lock nut can be finger tightened, locking the rod in place
- Works with all accessories that fit standard A or C type strut channels

“Internal studies have indicated time savings of up to 69% when installing a two-tier trapeze with one person”
(compared to traditional installation).



Material: Steel

Finish: Electrogalvanized; Pregalvanized




Part Number	Rod Size RS	Strut Type	Length L	Thickness T	A	B	X
CRLP237L14	3/8"	A (1 5/8" x 1 5/8")	16"	12 GA	14"	7/8"	9/16" x 1 1/8"
CRLP237L18	3/8"	A (1 5/8" x 1 5/8")	20"	12 GA	18"	7/8"	9/16" x 1 1/8"
CRLP237L22	3/8"	A (1 5/8" x 1 5/8")	24"	12 GA	22"	7/8"	9/16" x 1 1/8"
CRLP237L26	3/8"	A (1 5/8" x 1 5/8")	28"	12 GA	26"	7/8"	9/16" x 1 1/8"
CRLP237L38	3/8"	A (1 5/8" x 1 5/8")	40"	12 GA	38"	7/8"	9/16" x 1 1/8"
CRLP237L50	3/8"	A (1 5/8" x 1 5/8")	52"	12 GA	50"	7/8"	9/16" x 1 1/8"
CRLP137L14	3/8"	C (13/16" x 1 5/8")	16"	14 GA	14"	7/8"	9/16" x 1 1/8"
CRLP137L18	3/8"	C (13/16" x 1 5/8")	20"	14 GA	18"	7/8"	9/16" x 1 1/8"
CRLP137L22	3/8"	C (13/16" x 1 5/8")	24"	14 GA	22"	7/8"	9/16" x 1 1/8"
CRLP137L26	3/8"	C (13/16" x 1 5/8")	28"	14 GA	26"	7/8"	9/16" x 1 1/8"
CRLP137L38	3/8"	C (13/16" x 1 5/8")	40"	14 GA	38"	7/8"	9/16" x 1 1/8"
CRLP250L14	1/2"	A (1 5/8" x 1 5/8")	16"	12 GA	14"	7/8"	9/16" x 1 1/8"
CRLP250L18	1/2"	A (1 5/8" x 1 5/8")	20"	12 GA	18"	7/8"	9/16" x 1 1/8"
CRLP250L22	1/2"	A (1 5/8" x 1 5/8")	24"	12 GA	22"	7/8"	9/16" x 1 1/8"
CRLP250L26	1/2"	A (1 5/8" x 1 5/8")	28"	12 GA	26"	7/8"	9/16" x 1 1/8"
CRLP250L38	1/2"	A (1 5/8" x 1 5/8")	40"	12 GA	38"	7/8"	9/16" x 1 1/8"
CRLP250L50	1/2"	A (1 5/8" x 1 5/8")	52"	12 GA	50"	7/8"	9/16" x 1 1/8"
CRLP150L14	1/2"	C (13/16" x 1 5/8")	16"	14 GA	14"	7/8"	9/16" x 1 1/8"
CRLP150L18	1/2"	C (13/16" x 1 5/8")	20"	14 GA	18"	7/8"	9/16" x 1 1/8"
CRLP150L22	1/2"	C (13/16" x 1 5/8")	24"	14 GA	22"	7/8"	9/16" x 1 1/8"
CRLP150L26	1/2"	C (13/16" x 1 5/8")	28"	14 GA	26"	7/8"	9/16" x 1 1/8"
CRLP150L38	1/2"	C (13/16" x 1 5/8")	40"	14 GA	38"	7/8"	9/16" x 1 1/8"

CADDY ROD LOCK Strut must be installed with the open side of the channel facing up.
For indoor applications only.

CADDY ROD LOCK Channel Nut

- Provides fast universal attachment of threaded rod and hardware to standard strut profiles
- Can be used to prefabricate assemblies which can be quickly pushed onto previously installed threaded rods
- Works with slightly damaged threads and minor burrs on the threaded rod

Simple solution for multi-tiered trapeze installations or wall mount strut applications. Designed for open-side-up or open-side-down strut configurations



Material: Cast Iron
Finish: Electrogalvanized

Part Number	Rod Size RS	A	B	C	D	Static Load F	Standard Packaging Quantity
CRLS37EG	3/8"	0.91"	1.4"	0.769"	0.53"	750 lb	100 pc
CRLS37EGR2	3/8"	0.91"	1.4"	0.769"	0.53"	750 lb	20 x 2 pc

For use on plain and electro zinc plated hardware only.


“CADDY ROD LOCK”
Channel Nut is inserted into the strut, and once on-site, we lift the racks in place with some expected labor savings. The entire project includes about 350 racks of pipe.”

Will Vranich - Smith & Oby
(United States)



CADDY ROD LOCK Strut Nut

- Allows for the quick creation, installation, and adjustment of multi-level trapeze assemblies
- Installs in strut profiles without the need to insert fingers or tools into the strut
- Easy “push-to-install” design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Integrated adjustment nut enables fine tuning the system height up or down
- Lock nut can be finger tightened, locking the rod in place
- Accommodates slight variances in rod-to-rod position of the trapeze
- Can be used to prefabricate assemblies which can be quickly pushed onto previously installed threaded rods
- Works with slightly damaged threads and minor burrs on the threaded rod

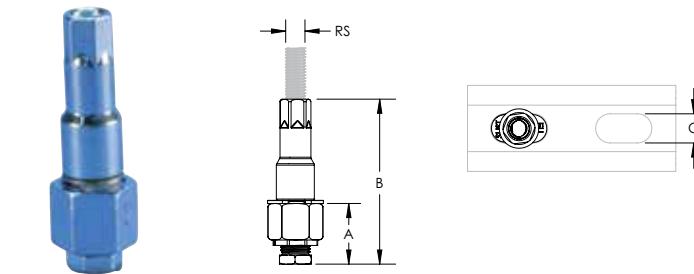

Material: Steel
Finish: Electrogalvanized

Part Number	Strut Type	Rod Size RS	A	B	C	Wrench Size 2	Wrench Size 2
CRLSL37EG	A [1 5/8" x 1 5/8"]	3/8"	1.19"	3.23"	9/16"	15/16"	14 mm

Wrench Size 1 represents CADDY ROD LOCK hex nut size. Wrench Size 2 represents stem nut size.



Must be installed with the open side of the strut channel facing up.

CADDY ROD LOCK Strut Nuts must be installed at a minimum of 1" (25.4 mm) from both ends of the strut channel.

CADDY ROD LOCK Nut

- Easy “push-to-install” design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Fast installation onto long threaded rods – push the nut in place instead of threading it up the rod
- Excellent alignment and easy fine adjustment by spinning the nut
- Extremely useful in tight spaces where wrenches are difficult to use

An innovative nut that you push into place on threaded rod.






Material: Steel
Finish: Electrogalvanized

Part Number	Rod Size RS	Height H	Width W	Wrench Size	Torque TQ	Static Load F
CRLN37EG	3/8"	0.8"	1.1"	15/16"	5 ft lb	1,350 lb

Static Load based on Grade 2 threaded rod.

SN Series Nut

- Allows side mounting of nut to threaded rod
- Reduces the need for threading compared to standard nuts and washers
- Ideal for retrofit projects, such as trapeze installations, where disassembly of the support system is not desired
- Works with slightly damaged threads and minor burrs on the threaded rod
- Reduces installation time up to 50%

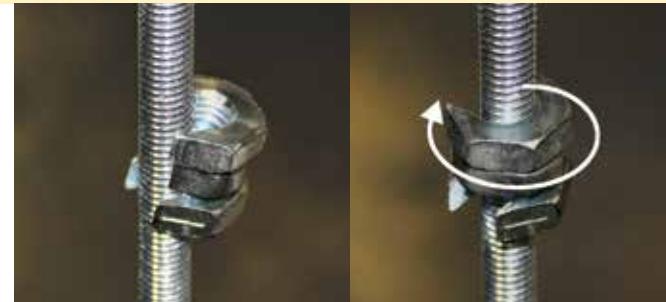

Material: Cast Iron
Finish: Electrogalvanized

Part Number	Rod Size RS	A	B	Static Load F
SN25	1/4"	0.55"	5/8"	500 lb
SN37	3/8"	0.75"	3/4"	1,350 lb
SN50	1/2"	0.90"	1"	2,250 lb

For use on plain and electro zinc plated hardware only.

“Using CADDY ROD LOCK products on a large bus bar installation did not only significantly reduce our installation time, it also improved safety by making installation easier in hard to reach places.”

Adam Stahl - Bravida Sverige AB
(Sweden)



ALSO AVAILABLE: [REDACTED]



Strut Trapeze Attachment Plate

- Creates fast install trapeze brackets
- Includes hex bolt and strut nut




Material: Steel
Finish: Electrogalvanized

Part Number	Rod Size RS
ISSP375	3/8"

SNSW Flanged Nut

- Ideal for retrofit projects, such as trapeze installations, where disassembly of the support system is not desired
- Use as a stopper when installing CADDY ROD LOCK assemblies
- Can be easily installed, removed, and repositioned at any location along the threaded rod
- Ready to use out of the box and eliminates multiple pieces of standard hardware
- Functions as a hex nut and flat washer combined
- Washer is wide enough to work with standard strut channel profiles

A combination of a slotted channel washer and nut that can be installed at any location along a threaded rod. Ideal for retrofit project where disassembly of the existing trapeze is not desired.

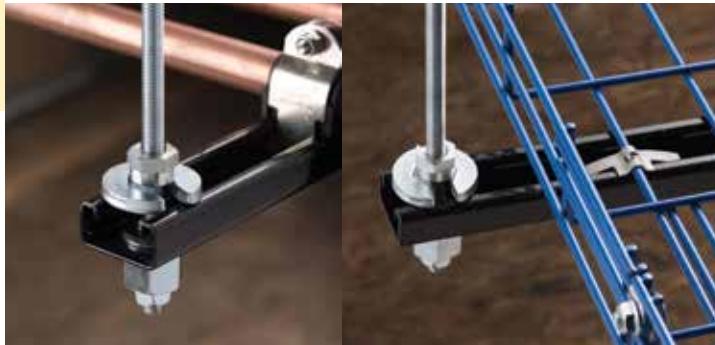

Material: Steel
Finish: Electrogalvanized
Static Load Safety Factor: 3:1

Part Number	Rod Size RS	Diameter Ø	A	B	Wrench Size	Static Load F
SNSW37	3/8"	1.67"	0.79"	1/4"	3/4"	300 lb
SNSW50	1/2"	1.90"	0.95"	1/4"	1"	300 lb

For use on plain and electro zinc plated hardware only.

ALSO AVAILABLE: [REDACTED]



CUSHION CLAMP Insulated Strut Clamp for Pipe/Tube

- Fits into open side of strut channel
- Plastic cushion is hinged to spread apart for easy installation
- Reduces noise and absorbs shock by gripping the pipe/tube firmly
- Square neck of carriage bolt prevents over-tightening
- Nylon locknut prevents loosening under vibration

Outer Diameter (OD)	6.3 mm - 114.3 mm
Copper Tube Size	1/4" - 4"
Pipe Size	1/4" - 4"
NB/DN	8 - 100




CADDY ROD LOCK Wire Basket Support Clip

- Allows wire basket to be suspended from threaded rod without the need of a strut trapeze
- Easy "push-to-install" design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Securing fingers provides superior stability, preventing damage to the cables in the basket
- Allows for pre-fabrication off site

Material: Spring Steel; Steel
Finish: CADDY ARMOUR; Electrogalvanized

Part Number	Rod Size RS	Diameter Ø	A	Static Load F
WBS37RL	3/8"	0.14" – 0.24"	1" – 1 1/4"	120 lb

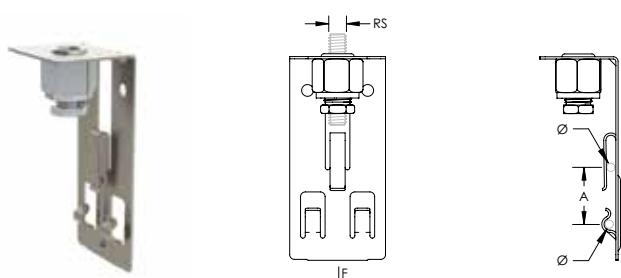

ALSO AVAILABLE:

Wire Basket Tray Clip



- Attaches wire basket tray to strut without additional hardware
- No tools required

Material: Spring Steel
Finish: CADDY ARMOUR

Part Number	Wire Size	Standard Packing Quantity
KBT	3/16" – 5/16"	100 pc


Use two clips per strut support for trays up to 12" (300mm). Use three clips per strut support for trays up to 18" (457mm) and add one clip per strut support for each additional 6" (150mm) of tray width.

No load rating, for positioning only.



CADDY ROD LOCK Universal Tray Support

- Universal design to accommodate various cable tray hanging methods including ceiling, wall, threaded rod, or cable hanging systems
- C-shape maintains accessibility to cables after installation is completed
- Easy "push-to-install" design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Strut profile on both arms allow for two runs of cable trays per bracket
- Top tab can be bent allowing for extra wide cable trays to be installed when two brackets are fastened back-to-back
- Key holes provided for wall mount applications
- Works with the KBT Wire Basket Tray Clip for securing wire basket cable tray or J-bolts for securing cable ladder

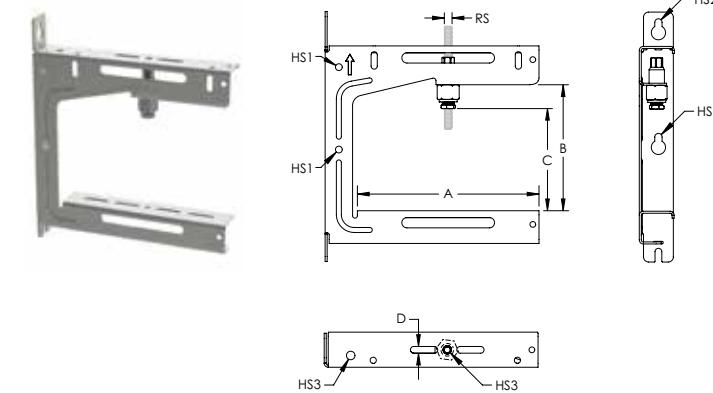

Material: Steel
Finish: Electrogalvanized

Part Number	Rod Size RS	A	B	C	D	Hole Size 1 HS1	Hole Size 2 HS2	Hole Size 3 HS3	Static Load 1 F1	Static Load 1 F1
UTS15038RL	3/8"	6.5"	6.1"	5"	0.325"	0.33"	0.33"	0.41"	100 lb	200 lb
UTS20038RL	3/8"	8.8"	6.1"	5"	0.325"	0.33"	0.35"	0.41"	100 lb	200 lb
UTS30038RL	3/8"	12.7"	6.2"	5"	0.325"	0.33"	0.33"	0.41"	100 lb	200 lb

Refer to Static Load 1 for installations with threaded rod. Refer to Static Load 2 for wall mount and 3 mm CADDY SPEED LINK installations.





WWW.ERICO.PENTAIR.COM

ANSI is a registered trademark of American National Standards Institute.; FM is a registered certification mark of FM Approvals LLC, LTD.; ICC-ES is a registered trademark of ICC Evaluation Service, LLC.; UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at www.erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2010, 2011, 2013, 2014, 2017 Pentair. All Rights Reserved