

Wallmount Sink Faucet

HDF[®]
COMMERCIAL

DELTA[®]

SPECIFICATION: (EXAMPLE)

- **CAST BRASS** two handle wallmount sink faucet
- Polished chrome-plated finish
- **BRASS** swing spout
- Supplied with adjustable centers – 175 mm to 235 mm (6.87" to 9.25")
- ADA compliant color indexed 102 mm (4") metal hooded blade handles with vandal resistant screws
- Control mechanism is a 1/4 turn cylinder type with brass stem, stainless steel plate and replaceable non-metallic seats and ... with ... (add spout required)

28P4402LF



Engineer/Architect Approval	
Model Specified:	
Approval:	Date:

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

28P4202LF

Variation/Spout

- 2 = 9.4" (239 mm) Tubular swing spout
- 4 = 8.06" (205 mm) Tubular swing spout
- 9 = 8.06" (205 mm) Tubular swing gooseneck spout

Outlet

- 0 = Vandal resistant aerator outlet 1.5 gpm (5.7 L/min)

Handle

- 2 = 4" (102 mm) Hooded Blade

AVAILABLE MODELS		OUTLET/VACUUM BREAKER		
		2	4	9
		2 Tubular Swing Spout 9.4" (239 mm) 	4 Tubular Swing Spout 8.06" (205 mm) 	9 Tubular Swing Gooseneck Spout 8.06" (205 mm) 
HANDLES	2 Hooded Blade 4" (102 mm)  	28P4202LF	28P4402LF	28P4902LF

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-28P4LF Rev. B

Wallmount Sink Faucet

HDF[®]
COMMERCIAL


DELTA

APPROVALS:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- Handle No. 2
-  Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)


FLOW RATE vs PRESSURE

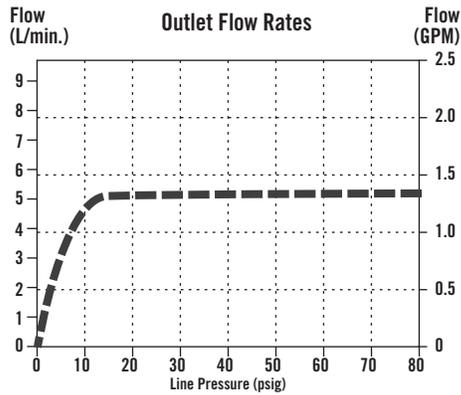


Spout Outlets

— No. 0 Aerator


FRONT VIEW

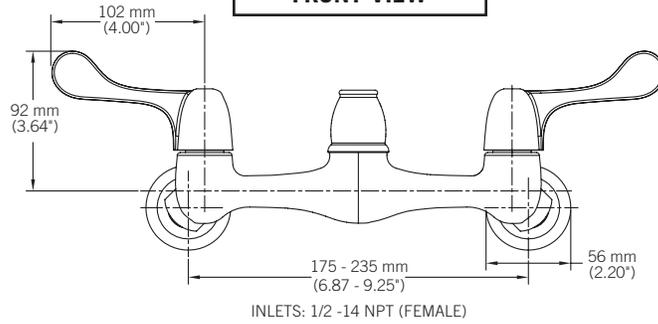


28P4202LF

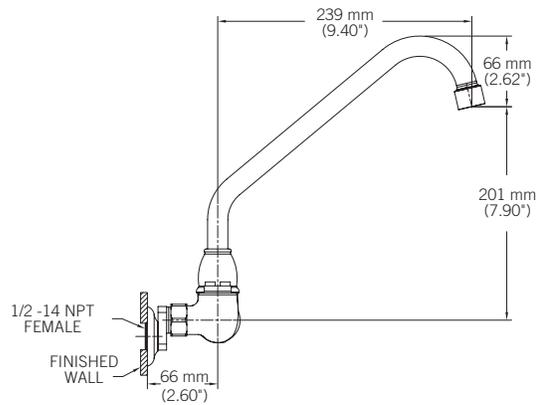

28P4402LF

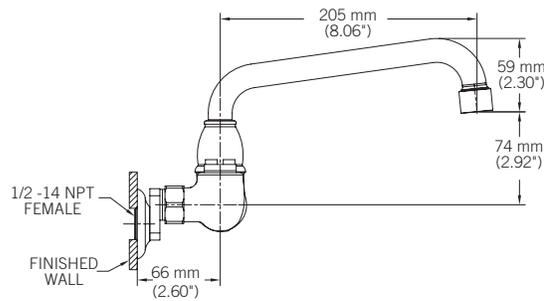

28P4902LF

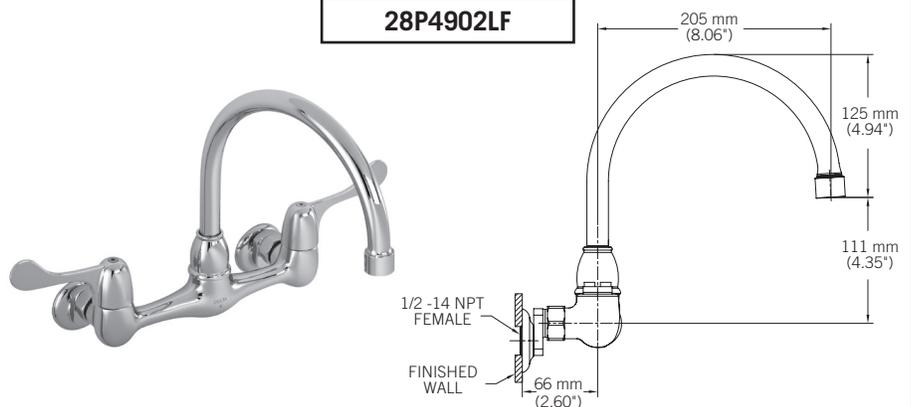

INLETS - 1/2" FIP

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.