

SUBMITTAL INFORMATION

Mechanical Joint Retainer (UFR1500R-ZA-x-I style)



3" - 6" SERIES UFR1500R RAPID INSTALL CIRCLE-LOCK MECHANICAL JOINT RESTRAINT FOR C900 AND IPS PVC WITH ACCESSORIES AND SO-EZ GASKET

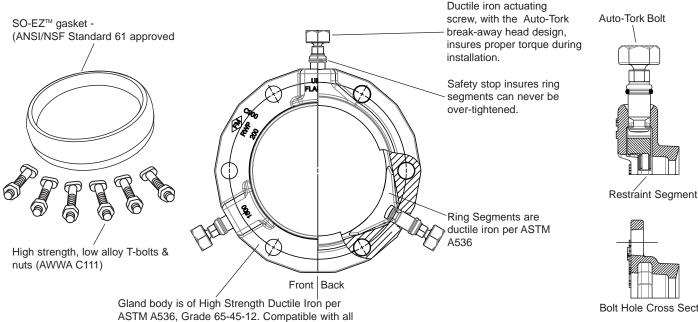

mechanical joints conforming to ANSI / AWWA C111 / A21.11.

Nом. Ріре		CATALOG	NO. OF RESTRAINT	Approx. Weight	P1*	P2	**	вс	D	PRESSURE RATING					✓ Submitted Item(s)
SIZE		NUMBER	SEGMENTS	(LBS.)		C900	IPS	BC		C900			ASTM D2241		
UIZL			OLOWILINIS	(LD3.)		C900	15			DR-14	DR-18	DR-25	SDR-21	SDR-26	
3"	3.50"	UFR1500R-ZA-3-I	2	10.70	11.50"	-	9.00"	6.19"	4.06"	-	-	-	200 PSI	160 PSI	
4"	4.50"-4.80"	UFR1500R-ZA-4-I	2	8.06	13.00"	10.25"	9.25"	7.50"	4.90"	305 PSI	235 PSI	165	200 PSI	160 PSI	
6"	6.63"-6.90"	UFR1500R-ZA-6-I	3	11.37	15.13"	12.17"	11.90"	9.50"	7.00"	305 PSI	235 PSI	165	200 PSI	160 PSI	

*Maximum O.D. of gland on pipe before Auto-Tork heads are removed (as shipped).

**Maximum O.D. of gland on pipe after Auto-Tork heads are removed.

FEATURES

- Fits C900 PVC and ASTM D2241 IPS PVC
- "Auto-Tork" actuating screws with heads specially designed to twist off at the correct installation torque, leaving a hex head in case future system maintenance or removal is required
- Restraining segments are mechanically retained in pockets
- Series 1500 eliminates the need to pour expensive and time consuming concrete thrust blocks
- FM approved for use on listed and approved C900 PVC pipe ٠
- Not approved for use on C909 PVC •
- Imported ductile iron castings ٠
- Gland, screws and segments are black epoxy coated using the e-coat process •
- Gland colored red for identification purposes •
- Assembled, inspected and packaged in the U.S.A.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

FORD

The Ford Meter Box Company, Inc. P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487 Overseas Fax: 260-563-0167 http://www.fordmeterbox.com

|--|

11/05/12

LANGE

Bolt Hole Cross Section