

### Features

- Premium construction.
- MasterClean™ spray nozzles prohibit mineral buildup for easy cleaning.
- Intended for use with Rite-Temp® or HiFlow Rite-Temp® valves.
- Diverter spout with NPT or slip-fit connection.
- 2.0 gal/min (7.6 l/min) maximum flow rate showerhead with Katalyst® Spray Technology.

### Required Accessories

- K- 11748-K Pressure-Balancing Valve w/Diverter  
or  
K- 11748-KS Pressure-Balancing Valve w/Diverter  
or  
K- 2971-KS 3/4" Pressure-balancing Valve  
or  
K- 304-CS Pressure-balancing Valve With Stops  
or  
K- 304-CX Pressure-balancing Valve Less Stops  
or  
K- 304-K Pressure-balancing Valve Less Stops  
or  
K- 304-KS Pressure-balancing Valve With Stops  
or  
K- 304-PS Pressure-balancing Valve With Stops  
or  
K- 304-PX Pressure-balancing Valve Less Steps  
or  
K- 304-US Pressure-balancing Valve With Stops  
or  
K- 304-UX Pressure-balancing Valve Less Stops

### Optional Accessories

- 88526 Thin Wall Trim Kit  
1016453 Diverter Button Kit  
1073881 Deep Rough-in Kit  
1092535 Roughing-in Kit  
1156950 Roughing-in Kit




### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

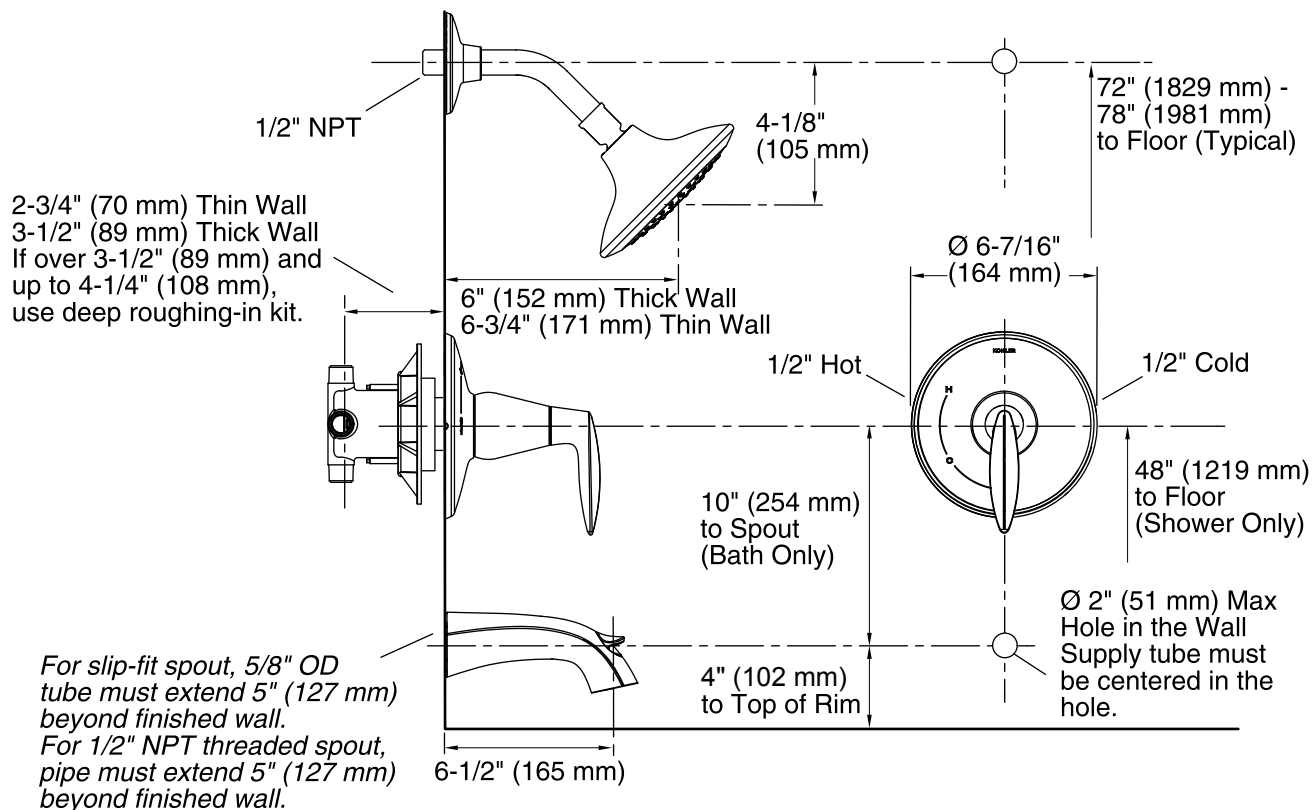

### Technical Information

All product dimensions are nominal.

Spout reach: 6-1/2" (165 mm)

### Showerhead:

Rated maximum flow: 2 gal/min (7.6 l/min)

Pressure: 80 psi (5.5 bar)

### Notes

For use with automatic compensating valves rated at 1.7 gal/min (6.4 l/min) or less.

Install this product according to the installation guide.

**NOTICE:** Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between valve and wall-mount spout.