Eemax® MiniTank™

Deliver Hot Water Wherever You Need It

Eemax MiniTank 1, 2.5, 4, and 6 are portable electric water heaters. MiniTanks provide hot water wherever a water and electrical outlet are available. Ideal for recreational vehicles, barns, food trucks and outdoor kitchens. Installed at the point-of-use they can deliver up to 6 gallons of hot water.

PERFORMANCE FEATURES

- Saves Space Compact design is up to 93% smaller than a standard electric water heater
- Installs in an upright position on the floor or wall (bracket included)
- Flexible operation with hot and cold water feeds from unit
- Status indicator lights illuminate for power and when the unit is actively heating
- Power cord connects to a grounded 120V shared outlet. No electrical work required.
- Replaceable heating element, anode rod and enameled glass-lined tank with a single weld design extends units life
- Temperature adjusting dial controls the water temperature range from 50°F 140°F (10°C 60°C)
- Includes temperature and pressure (T&P) relief valve (210°F and 150 PSI)

Electric Water Heaters

MINITANK







Tested and certified by the Water Quality Association against NSF/ANSI 372 for lead free compliance.

MINITANK SPECIFICATIONS


• Limited Warranty - 6 Years - Leaks, 2 Years - Parts

See Use and Care Manual for complete information.

WARRANTY


Model #	EMT1	EMT2.5	EMT4	EMT6
Gallons	1.6	2.6	3.8	6.1
Power (WATTS)	1440	1440	1440	1440
Voltage	120	120	120	120
Total Unit Amperage (AMPS)	12 A	12 A	12 A	12 A
Phase	1	1	1	1
Water Connections	1/2" NPT (top)	1/2" NPT (top)	½″ NPT (top)	1/2" NPT (top)
Max Water Pressure (PSI)	150	150	150	150
Dimensions	15.39"H x 9.71"W x 9.63"D	17"H x 10.91"W x 10.94"D	18.24"H x 12.28"W x 12.65"D	20.83"H x 13.86"W x 14.19"D
Weight	13.9 lbs.	17.6 lbs.	21 lbs.	27.1 lbs.
Max Recovery Time	8 minutes	15 minutes	24 minutes	37 minutes
Connection Type	Plug-in	Plug-in	Plug-in	Plug-in
T&P Relief Valve	Included	Included	Included	Included



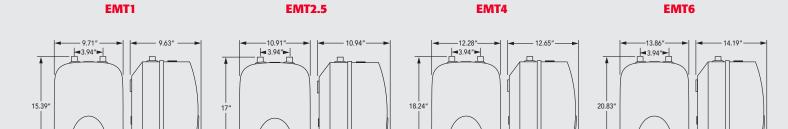


SAMPLE INSTALLATIONS


STANDALONE POINT-OF-USE HEATING APPLICATION

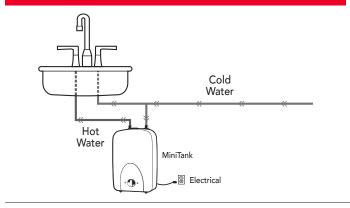

STANDALONE POINT-OF-USE MULTI FIXTURE APPLICATION



POINT-OF-USE BOOSTER HEATING APPLICATION FROM CENTRAL TANK HEATING SYSTEM

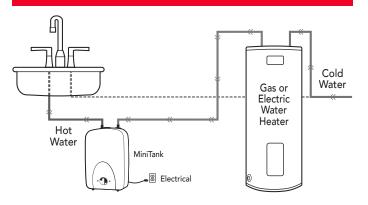

SOLUTION FOR "COLD WATER SANDWICH" GAS TANKLESS HEATING APPLICATION

