

TROPIC® TWO-HANDLE CENTERSET LAVATORY FAUCET


Continued by 19400 Pist

MODEL NUMBER:

☐ 7038.201 Tropic Two- Handle Centerset

Metal Speed Connect® pop-up drain.

Metal lever handles.

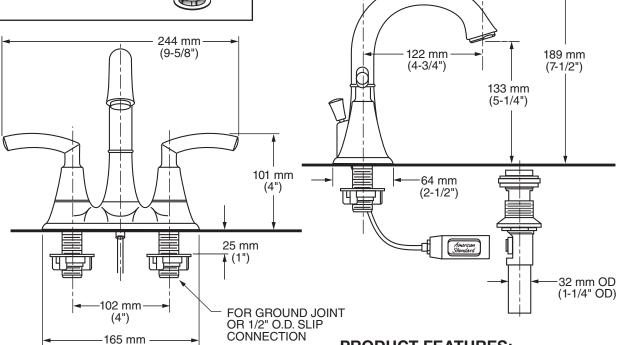

GENERAL DESCRIPTION:

Durable cast brass spout and metal lever handles. Cast brass waterway with one-half inch male inlet shanks and brass coupling nuts. 1/4 turn washerless ceramic disc valve cartridges. 20 inch (500 mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate.

(6-1/2")

PRODUCT FEATURES:

Cast Brass Spout and Waterway: Durable. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.

SUGGESTED SPECIFICATION

4" centerset lavatory faucet shall feature a cast brass spout and waterway with 1/2" male inlet shanks. Shall feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7038.201.

© 2015 AS America, Inc.

Revised 12/15




TROPIC® TWO-HANDLE CENTERSET LAVATORY FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125.1 NSF 61/Section 9 and Annex G



			Finish Options	
			Polished Chrome	PVD Satin Nickel
Product Number	Description		002	295
7038.201	Tropic Two-Handle Centerset with metal Speed Connect® pop-up drain. Metal lever handles.	E		



Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**
0.5 gpm (1.9 Lpm) PCA* Spray	F05
1.0 gpm (3.8 Lpm) PCA Aerator	F10

AVAILABLE N	Parts Suffix**	
	Less Pop-Up Drain Less Hole	LDH

Revised 12/15 © 2015 AS America, Inc.

^{*}PCA — Pressure Compensating

^{**}To modify a product, add suffix after the 4th digit (ex. 2064**F05**101.002)

^{***}Modified product models are **NOT** WaterSense certified.