

PRESSURE BALANCE BATH/SHOWER FITTING



T430.502 Bath/Shower Trim Shown


GENERAL DESCRIPTION:

TRIM KIT

All brass 6-3/4" rain showerhead. Slip-on diverter spout. Available with metal lever handle. Showerhead: 2.5/9.5L/min. max. flow rate.

ROUGH VALVE BODY

Cast brass body, washerless ceramic disc valve cartridge with back to back capability, integrated check valves and hot limit safety stop. Cycles from "off" to "cold" to "hot". Pressure balancing cartridge maintains constant output temperature in response to changes in relative hot and cold supply pressure. 1/2" inlets and outlets (choice of direct sweat, threaded, or PEX). Available with screwdriver stops. Rough-in plaster guard designed for use as thin-wall mounting adaptor.

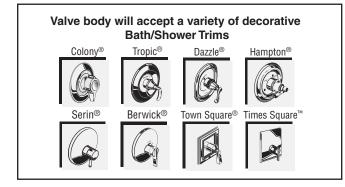

MODEL NUMBER:

TRIM KITS:

- T430.502 Berwick BATH/SHOWER Trim Kit Metal Lever Handle. L ESS Valve Body.
- T430.501 Berwick BATH/SHOWER Trim Kit Metal Lever Handle. LESS Valve Body.
- T430.500 Berwick VALVE ONLY Trim Kit Metal Lever Handle. L ESS Valve Body.

ROUGH VALVES:

- R110 Pressure Balance Rough Valve Body only Direct sweat inlets/outlets. LESS trim.
- R110SS Pressure Balance Rough Valve Body only with Screwdriver stops
 Direct sweat inlets/outlets. Screwdriver stops. LESS trim.
- R115 Pressure Balance Rough Valve Body only Female thread inlets/outlets. LESS trim.
- R115SS Pressure Balance Rough Valve Body only with Screwdriver stops
 Female thread inlets/outlets. Screwdriver stops. LESS trim.
- R117 Pressure Balance Rough Valve Body only PEX inlets/Direct sweat outlets. LESS trim.
- R117SS Pressure Balance Rough Valve Body only with Screwdriver stops

PEX inlets/Direct sweat outlets. Screwdriver stops. LESS trim.

PRODUCT FEATURES:

Rough Valve Body: Durable quality that will last a lifetime. Ideal material for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance. Allows easy control over both water temperature and volume.

Pressure Balancing Valve Cartridge: Maintains constant output temperature in response to changes in relative hot and cold supply pressure. Diaphragm system with integrated check valves engineered to eliminate cross flow. Avoids failure due to mineral deposits - ideal for use in hard water.

Back-to-Back Capability: Hot and cold can be reversed quickly and easily.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Exclusive Plaster Guard: Plaster guard is designed to protect valve during installation and serve as a mounting plate for thin-wall installations. Two piece design allows valve to be tested prior to trim installation.

Wide Rough-in Range: From 1-5/8" to 3-1/4".


Showerhead: Brass construction: durable quality that will last a lifetime.

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature all brass rain 6-3/4" showerhead with Max. 2.5gpm/9.5L/min. flow rate. Shall feature a cast brass valve body. Shall feature ceramic disc valve cartridge which is capable of back-to-back installation. Fitting shall be equipped with pressure balancing cartridge engineered to eliminate cross flow and avoid failure due to mineral deposits. Shall also feature hot limit safety stop. Fitting shall be: Rough Valve Body - American Standard Model # R11_____, Trim Kit - American Standard Model # T430.50_.____.



BERWICK® PRESSURE BALANCE BATH/SHOWER FITTING

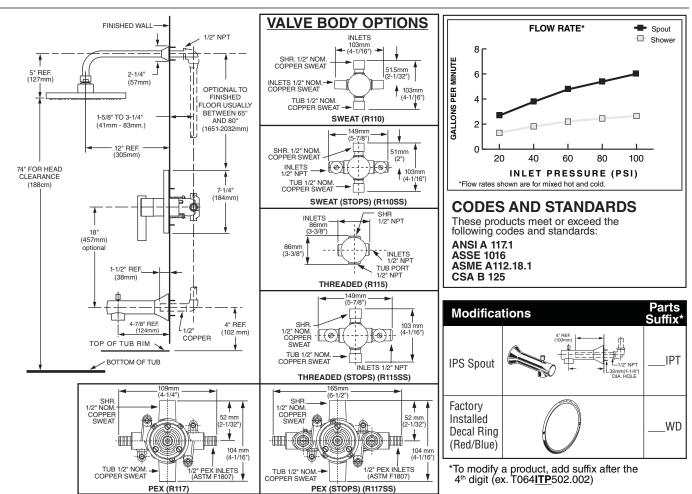

		* TRIM & ROUGH MUST BE ORDERED SEPARATELY.		Finish O	ptions
* S	Product	Thim a riodan most be onserted bet Anateen		Polished Chrome	PVD Satin Nickel
RIM	Number	Description		002	295
	T430.502	Bath/Shower Trim Kit. Metal Lever Handle. FloWise Showerhead. LESS Valve Body.	5		
	T430.501	Shower Only Trim Kit. Metal Lever Handle. FloWise Showerhead. LESS Valve Body.	5		
	T430.500	Valve Trim Only . Metal Lever Handle. LESS Valve Body.	5		

ODIES	Product Number	Description
ROUGH VALVE BOD	R110	Rough Valve Body less trim. Direct Sweat inlets/outlets.
	R110SS	Rough Valve Body less trim. Direct Sweat inlets/outlets with Screwdriver Stops.
	R115	Rough Valve Body less trim. Female Thread inlets/outlets.
	R115SS	Rough Valve Body less trim. Female Thread inlets/outlets with Screwdriver Stops.
	R117	Rough Valve Body less trim. PEX inlets/ Direct Sweat outlets.
	R117SS	Rough Valve Body less trim. PEX inlets/ Direct Sweat outlets with Screwdriver Stops.

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.