	_		
	۲	2	
	¥		
1	Ħ	_	
•	È		
	۶	5	
	`	-	
٦	t	5	
	٦		
	ď	2	
	٤		
1	Ē	5	
	Ĺ		
	ά	3	
	a	١	
	ř	5	
	η	3	
	=	5	
	٦	5	
	בטע	١	
	π	3	
	U	)	
1	÷	_	
	ā	5	
	č	_	
	ξ		
	'n	_	
	Ξ	3	
	U	2	
	ņ	,	
	۲	_	
	S C C C C		
	÷	,	
	đ	١	
	ď	2	
	-		
	ĭ	'	
	ă	ì	
	ž	Ś	
t	7	Š	
Ì		•	


	For Comm
	JOB NAME _
	LOCATION _
FLANGE USA	ENGINEER _
<i><b>FLANGE U3A</b></i>	APPROVAL

## For Commercial, Institutional or Industrial Applications

JOB NAME	CONTRACTOR
LOCATION	APPROVAL
ENGINEER	CONT PO NO

REPRESENTATIVE

## **Roll Grooved Copper Flange**

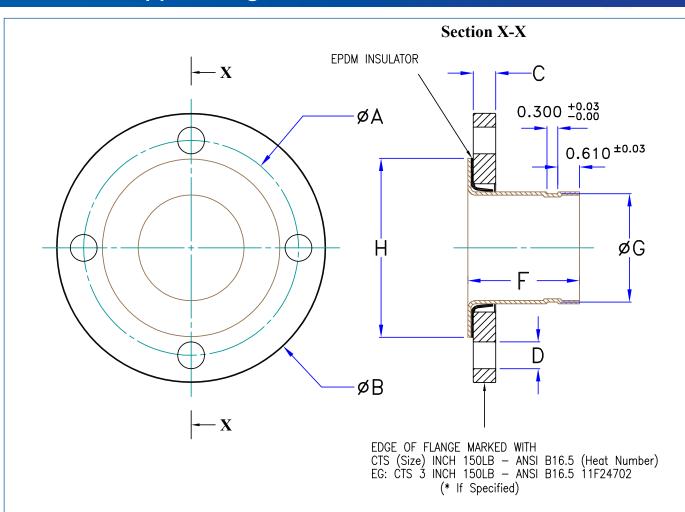

		2	2.5	3	4	5	6
		INCH	INCH	INCH	INCH	INCH	INCH
	Code	WRG1020	WRG1025	WRG1003	WRG1004	WRG1005	WRG1006
A.	Bolt Circle Diam	4.75	5.50	6.00	7.50	8.50	9.50
В.	Flange Diameter	6.00	7.00	7.50	9.00	10.0	11.0
C.	Flange Thickness	0.63	0.63	0.63	0.71	0.75	0.87
	No. Bolt Holes	4	4	4	8	8	8
D.	Bolt Hole Diam	0.75	0.75	0.75	0.75	0.87	0.87
	Cu tube End OD	2.125	2.625	3.125	4.125	5.125	6.125
F.	Cu Piece Length	2.63	2.00	2.44	2.88	3.94	4.31
G.	Groove Dia (+0/-0.02)	2.029	2.525	3.025	4.019	5.019	5.999
Н.	Cu Flange OD	3.70	4.20	5.00	6.20	7.30	8.40



THIRD ANGLE

ANSI B16.5 150LB POWDER COATED CTS FLANGE & COPPER ROLL GROOVED PIECE

Dimension Unit. Inches (Decimal)

Drawing No. USA-20170317-106

DRN BY FAS DATE: MAR 17-2017 CHK BY FAS DATE: MAR 17-2017 APR BY: FAS DATE MAR 17-2017 Rev. A

FLANGE