

Features

- 4-7/8" (124 mm) diverter bath spout with slip-fit connection.
- Slip-fit spout.
- Lever handles.
- 2.5 gallon (9.5 L) per minute flow rate.
- Trim only; requires valve to complete.

Material

- Premium construction ensures durability and reliability.

Required Accessories

- K- 304-CS Pressure-balancing Valve With Stops
or
K- 304-CX Pressure-balancing Valve Less Stops
or
K- 304-K Pressure-balancing Valve Less Stops
or
K- 304-KS Pressure-balancing Valve With Stops
or
K- 304-PS Pressure-balancing Valve With Stops
or
K- 304-PX Pressure-balancing Valve Less Steps
or
K- 304-US Pressure-balancing Valve With Stops
or
K- 304-UX Pressure-balancing Valve Less Stops

Optional Accessories

88526 Thin Wall Trim Kit

Loose component/s: Showerhead with arm and flange, faceplate, and lever handle.



Codes/Standards


ASME A112.18.1/CSA B125.1

ASSE 1016

DOE - Energy Policy Act 1992

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

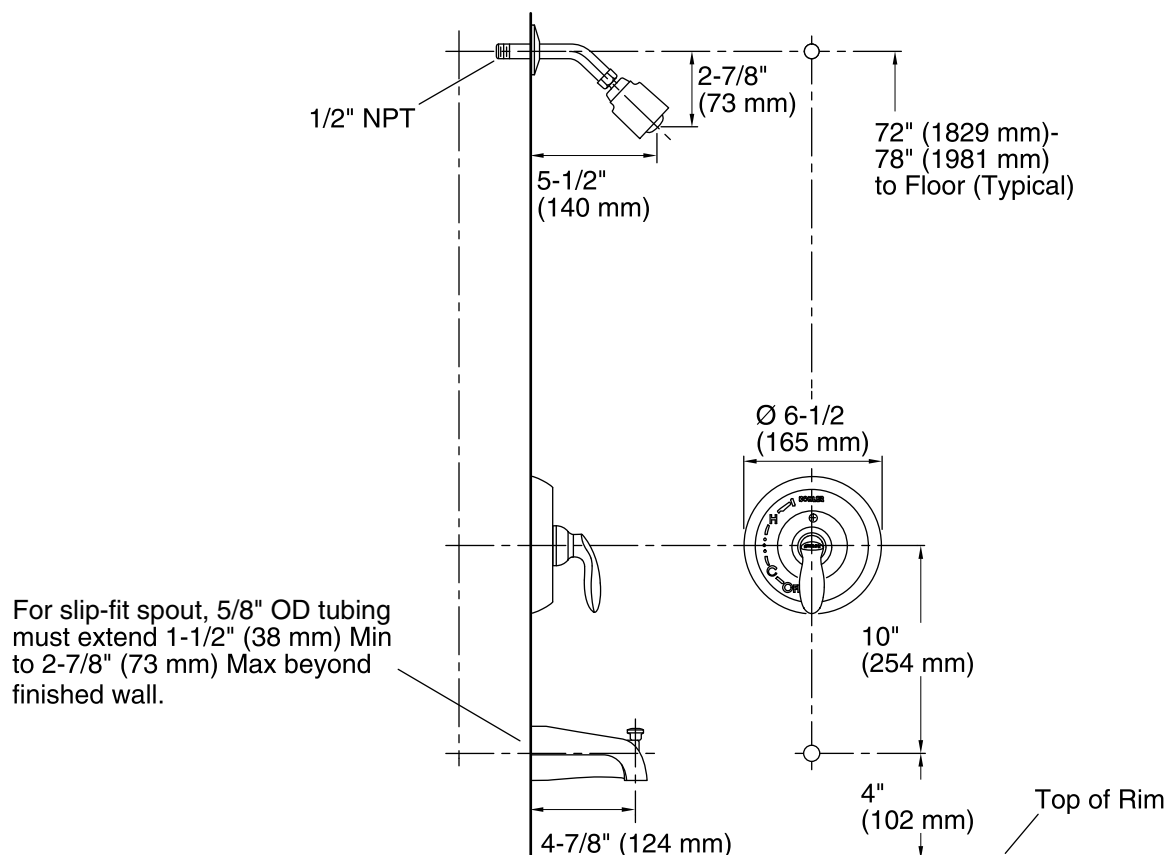

Technical Information

All product dimensions are nominal.

Showerhead:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

Notes

Install this product according to the installation guide.

NOTICE: Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

Avoid cross-flow conditions. Do not install a shut-off device on either valve outlet.

Cap the shower outlet if deck-mount spout, diverter, or handshower is connected to the spout outlet.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and wall-mount spout.