



MAXIMUM IMPACT

More Power. Less Air. Not only does the new Ingersoll Rand® 2145QiMAX Impact Wrench delivers incredible performance and industrial-grade durability, its efficient air motor also reduces air consumption — which saves you money.

MAX POWER

1350 ft-lb maximum reverse torque from a tool that weighs just 7.4 lbs and is compact enough to access tight spaces

MAX DURABILITY

Built to last and designed to withstand tough use in rugged environments; a two-year limited warranty is standard

MAX PRODUCTIVITY

An air motor that's 16% more efficient than its predecessor and an easy-to-clean inlet screen means less downtime, better tool performance, and less money spent on compressed air



Assembly and Disassembly of machinery and heavy equipment




Vehicle Service



Equipment Maintenance

	Specifications	2145QiMAX*	2155QiMAX
	Drive	3/4"	1"
	Max Torque (Reverse)	1350 ft-lb (1830 Nm)	1350 ft-lb (1830 Nm)
	Forward Torque Range	200 - 900 ft-lb (271-1220 Nm)	200 - 900 ft-lb (271-1220 Nm)
	Blows Per Minute	1150	1150
	Maximum Free Speed	7000 rpm	7000 rpm
	Sound Pressure (free speed)	91.1 dBA	91.1 dBA
I MAXIMUM	Net Weight	7.4 lb (3.4 kg)	7.4 lb (3.4 kg)
	Overall Length	8.5" (217 mm)	8.8" (225 mm)
IMPACT	Air Requirements		
	Average Air Consumption	8.5 cfm (241 L/min)	8.5 cfm (241 L/min)
	Air Consumption @ load	32 cfm (906 L/min)	32 cfm (906 L/min)
	Air Inlet	1/2" NPTF	1/2" NPTF
	Min Hose Size	1/2" (13 mm)	1/2" (13 mm)
	*Available in 3" and 6" extended	anvils.	

2145QIMAX 3/4" AIR IMPACT WRENCH

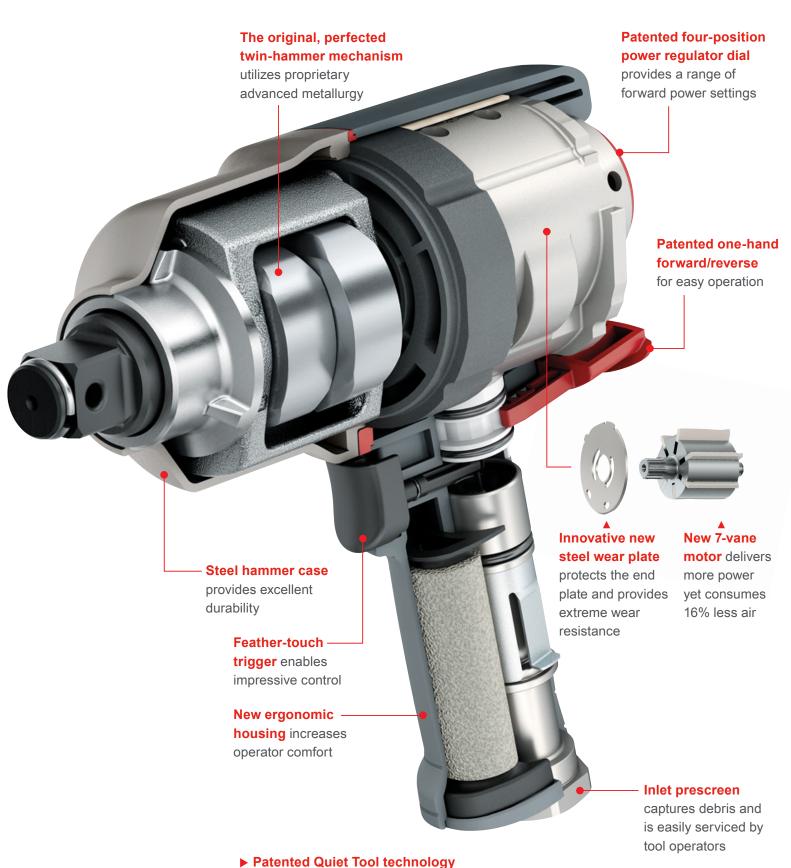

reduces sound levels without compromising best-in-class power performance





