


FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP

FUNCTION: For use in finished floors bearing foot and medium load wheeled traffic. Allows for easy floor level adjustment.

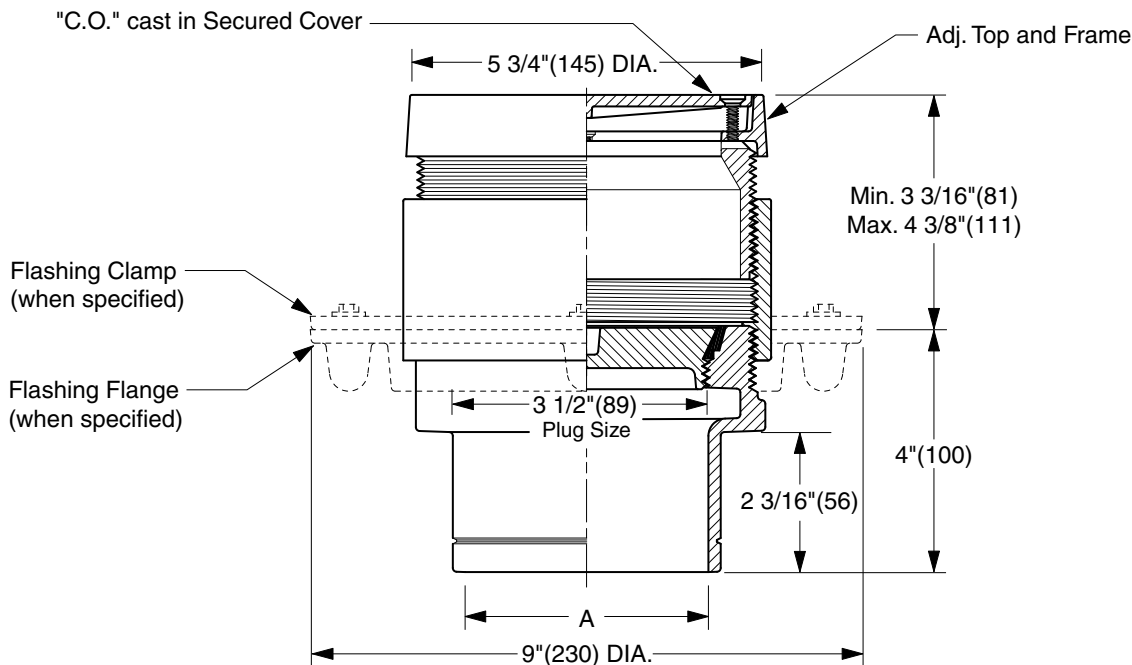

TWIS-TO-FLOOR® ADJUSTMENT

NO-HUB OUTLET

"A" (Pipe Size) = 02(50), 03(75), 04(100) or 05(125)

NOTE: For applications using core drilling, the largest diameter of the cleanout assembly is 6 5/16" (160).

- | | |
|--|---|
| | Fig. 4020S.....Gasket Seal - ABS Plug |
| | Fig. 4021S.....Gasket Seal - Bronze Plug |
| | Fig. 4023S.....Taper Thread - Bronze Plug |
| | Fig. 4024S.....Taper Thread - ABS Plug |

(Twis-to-Floor® design shown with gasketed plug.)

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Round Adjustable Scoriated Secured Nickel Bronze Top. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:

- | | |
|--|---------------------------------|
| | Flashing Flange -F |
| | Flange with Flashing Clamp -F-C |
| | Carpet Clamping Type -X |
| | Carpet Marker Type -Y |
| | Vandal Proof Top -U |
| | Wide Flange (DX) |

OPTIONAL MATERIALS:

- | | |
|--|-------------------------|
| | Galvanized Cast Iron -G |
| | Polished Bronze Top -PB |

NOTE: Dimensions shown in parentheses are in millimeters.

N	11-20-09	Revised Variations	RN	BW	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4020 SERIES
M	12/18/08	Addition to Variations	JJ	BW			
L	12/17/04	Added Core-Drilling Note	JJ	CL			
K	07/26/02	Corrected Clamp & Flange view	JJ	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			



JAY R. SMITH MFG. CO.
DIVISION OF SMITH INDUSTRIES, INC.
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com




LOCATION

FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP

FUNCTION: For use in finished floors bearing foot and medium load wheeled traffic. Allows for easy floor level adjustment.

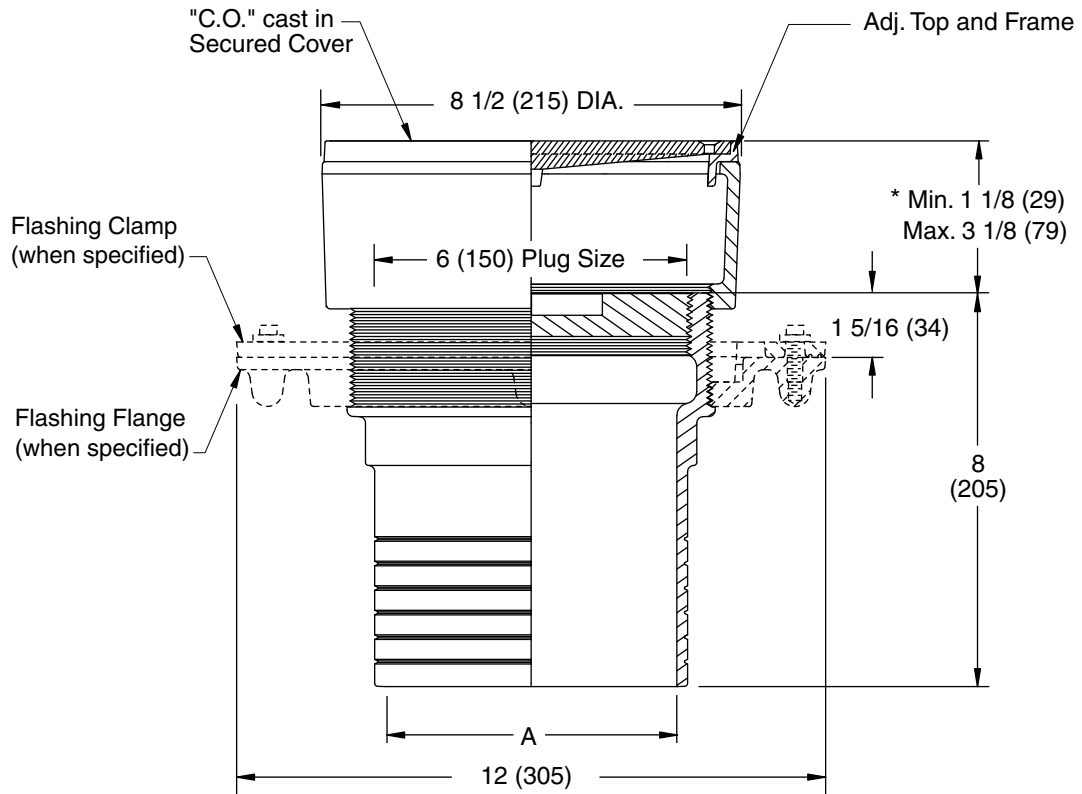

SPIGOT OUTLET▲
"A" (Pipe Size) = 06(150) & 08(200)

▲ Sized for Service Weight and/or NO-HUB.

* When Flange-F is specified Min. 1 1/8 (29) becomes 1 5/8 (41)

"TWIS-TO-FLOOR®" ADJUSTMENT
SPIGOT OUTLET▲

☐ Fig. 4023S.....Taper Thread - Bronze Plug

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Scoriated Secured Nickel Bronze Top.

VARIATIONS:

- ☐ Flashing Flange -F
- ☐ Flange with Flashing Clamp -F-C
- ☐ Carpet Clamping Type -X
- ☐ Carpet Marker Type -Y
- ☐ Vandal Proof Top -U
- ☐ Wide Flange (DX)

OPTIONAL MATERIALS:

- ☐ Galvanized Cast Iron -G
- ☐ Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S4020BS

SIZE
A

SCALE:
NONE

DATE:
5-5-06

APPROVED BY:
CEL

CHECKED BY:
CL

DRAWN BY:
RN

4023

FIGURE
NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS	VOLUME CUBIC FEET

FIGURE NUMBER
4023