



CSA6

Product Specifications

16 SEER SINGLE STAGE AIR CONDITIONER WITH OBSERVER™ COMMUNICATING CONTROL SYSTEM

1½ THRU 5 TONS SPLIT SYSTEM

208 / 230 Volt, 1-phase, 60 Hz

REFRIGERATION CIRCUIT

- Copeland Scroll® compressors on all models
- Filter-drier supplied with every unit for field installation
- External high and low refrigerant service ports
- Copper tube / aluminum fin coil

PERFORMANCE

- Communicating, self-configuring operation when used with Observer Wall Control (TSTAT0101SC)
- Outdoor temperature sensor factory installed
- Compressor sound blanket standard
- Isolation compressor grommets

EASY TO INSTALL AND SERVICE

- Text based diagnostics with Observer Communicating Wall Control
- Easy access service valves on all models
- Innovative control box design
- High and low pressure switches
- Only two screws to access control panel
- Factory charged with R-410A refrigerant

BUILT TO LAST

- High gloss, baked-on powder coat finish over galvanized steel
- Post-painted (black) coil fins
- Coated, weather-resistant cabinet screws
- Coated inlet grille with 3/8" (10mm) spacing for extra protection
- Corner posts for extra strength and style

WARRANTY*

- 5 year No Hassle Replacement™ limited warranty
- 5 year parts limited warranty (including compressor and coil)
 - With timely registration, an additional 5 year parts limited warranty (including compressor and coil)

* Applies to original purchaser/homeowner, some limitations may apply. See Warranty certificate for complete details.



TSTAT0101SC



This product has been designed and manufactured to meet ENERGY STAR criteria for energy efficiency when matched with appropriate coil components. However, proper refrigerant charge and proper air flow are critical to achieve rated capacity and efficiency. Installation of this product should follow the manufacturer's refrigerant charging and air flow instructions. Failure to confirm proper charge and airflow may reduce energy efficiency and shorten equipment life.




Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.

Model Number	Size (tons)	Nominal Btu/hr	Min. Circuit Ampacity	Max. Fuse or Breaker	Operating Dimensions height x width x depth in. (mm)	Ship / Operating Weight lbs. (kg)
CSA618GKA	1½	18,000	11.8	20	28-11/16 x 31-3/16 x 31-3/16 (729 x 792 x 792)	213 / 176 (96 / 80)
CSA624GKA	2	24,000	17.6	25	28-11/16 x 31-3/16 x 31-3/16 (729 x 792 x 792)	212 / 176 (96 / 80)
CSA630GKA	2½	30,000	16.7	25	32-1/8 x 31-3/16 x 31-3/16 (816 x 792 x 792)	223 / 187 (101 / 85)
CSA636GKA	3	36,000	18.1	30	30-1/16 x 35 x 35 (764 x 889 x 889)	243 / 200 (110 / 91)
CSA642GKA	3½	42,000	23.6	40	40-1/4 x 35 x 35 (1023 x 889 x 889)	297 / 253 (135 / 115)
CSA648GKA	4	48,000	26.1	40	40-1/4 x 35 x 35 (1023 x 889 x 889)	340 / 295 (155 / 114)
CSA660GKA	5	60,000	28.0	40	47-1/16 x 35 x 35 (1196 x 889 x 889)	374 / 327 (169 / 148)


OUTDOOR UNIT MODEL NUMBER IDENTIFICATION GUIDE (single phase)											
Digit Position:	1	2	3	4	5, 6	7	8	9	10	11	12
Example Part Number:	C	S	A	6	18	G	K	A	1	0	0
C = Day & Night Mainline N = Day & Night Entry BRANDING											
S = Single Stage Communicating KEY CHARACTERISTIC											
A = Air Conditioner H = Heat Pump TYPE											
3 = 13 SEER 4 = 14 SEER 5 = 15 SEER 6 = 16 SEER 7 = 17 SEER 8 = 18 SEER NOMINAL EFFICIENCY											
18 = 18,000 BTUH = 1½ tons 24 = 24,000 BTUH = 2 tons 30 = 30,000 BTUH = 2½ tons 36 = 36,000 BTUH = 3 tons 42 = 42,000 BTUH = 3½ tons 48 = 48,000 BTUH = 4 tons 60 = 60,000 BTUH = 5 tons NOMINAL CAPACITY											
A = Standard Grille G = Coil Guard Grille C = Coastal FEATURES											
K = 208/230-1-60 VOLTAGE											
Sales Code											
Engineering Revision											
Extra Digit											
Extra Digit											

ACCESSORIES PART NUMBER IDENTIFICATION GUIDE									
Digit Position:	1	2	3	4	5	6, 7	8, 9	10, 11	
Example Part Number:	N	A	S	A	0	01	01	CH	
N = Non-Branded									
A = Accessory PRODUCT GROUP									
S = Split System (AC & HP) KIT USAGE									
A = Original B = 2nd Generation MAJOR SERIES									
0 = Generic or Not Applicable 2 = R-22 4 = R-410A REFRIGERANT									
Product Identifier Number									
Package Quantity									
Type of Kit (Example: CH = Crankcase Heater)									

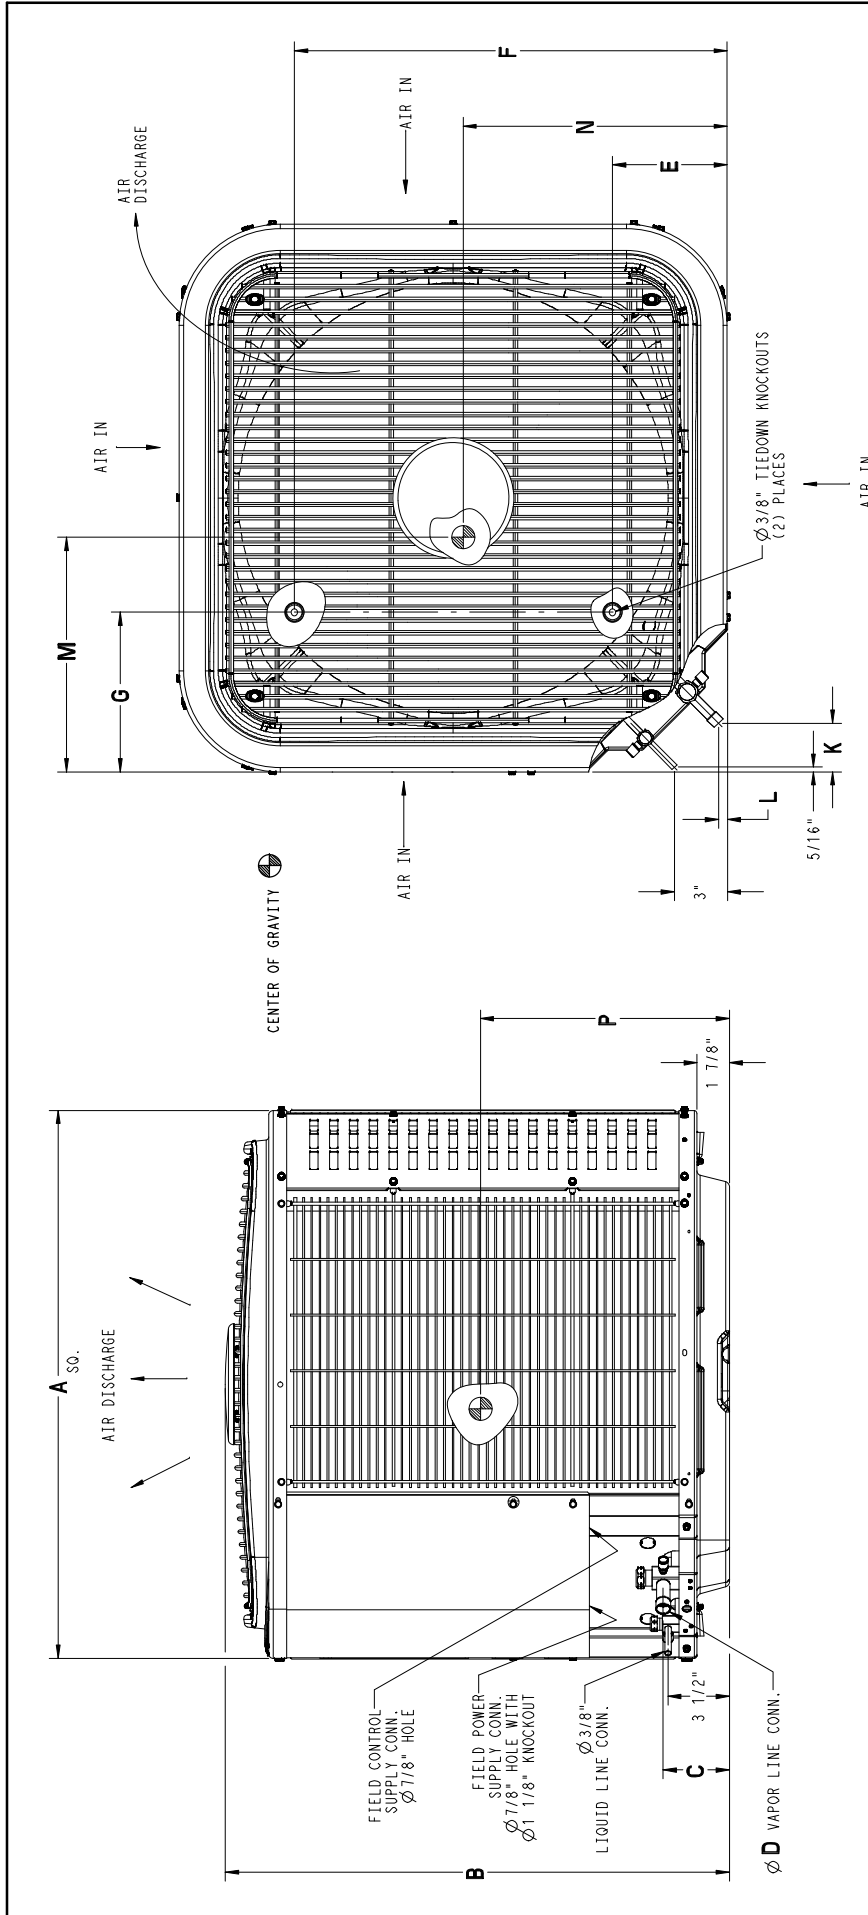

Dimensions Inches (English)

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Minimum Mounting Pad Size	Crated Dimensions L x W x H
CSA618GKA	31-3/16	28-11/16	3-3/4	3/4	6-9/16	24-11/16	9-1/8	2-13/16	1/2	15-1/2	17	14	14	14	14	14	31-1/2 x 31-1/2	32-5/16 x 35-1/2 x 36
CSA624GKA	31-3/16	28-11/16	3-3/4	3/4	6-9/16	24-11/16	9-1/8	2-13/16	1/2	16-1/4	15-1/4	14	14	14	14	14	31-1/2 x 31-1/2	32-5/16 x 35-1/2 x 36
CSA630GKA	31-3/16	32-1/8	3-3/4	3/4	6-9/16	24-11/16	9-1/8	2-13/16	1/2	15	15-3/4	14-3/4	14	14	14	14	31-1/2 x 31-1/2	32-5/16 x 35-1/2 x 39-3/8
CSA636GKA	35	30-1/16	3-7/8	7/8	6-9/16	28-7/16	9-1/8	2-15/16	5/8	17	16-3/4	14	14	14	14	14	35 x 35	36-1/8 x 39-1/4 x 36
CSA642GKA	35	40-1/4	3-7/8	7/8	6-9/16	28-7/16	9-1/8	2-15/16	5/8	17	16	18-1/2	17	16	16	18-1/2	35 x 35	36-1/8 x 39-1/4 x 46-1/8
CSA648GKA	35	40-1/4	3-7/8	7/8	6-9/16	28-7/16	9-1/8	2-15/16	5/8	17-1/2	16-1/4	18	17-1/2	16-1/4	18	18	35 x 35	36-1/8 x 39-5/16 x 46-1/8
CSA660GKA	35	47-1/16	3-7/8	7/8	6-9/16	28-7/16	9-1/8	2-15/16	5/8	17-1/2	17-1/4	21	17-1/2	17-1/4	21	21	35 x 35	36-1/8 x 39-1/4 x 50-13/16

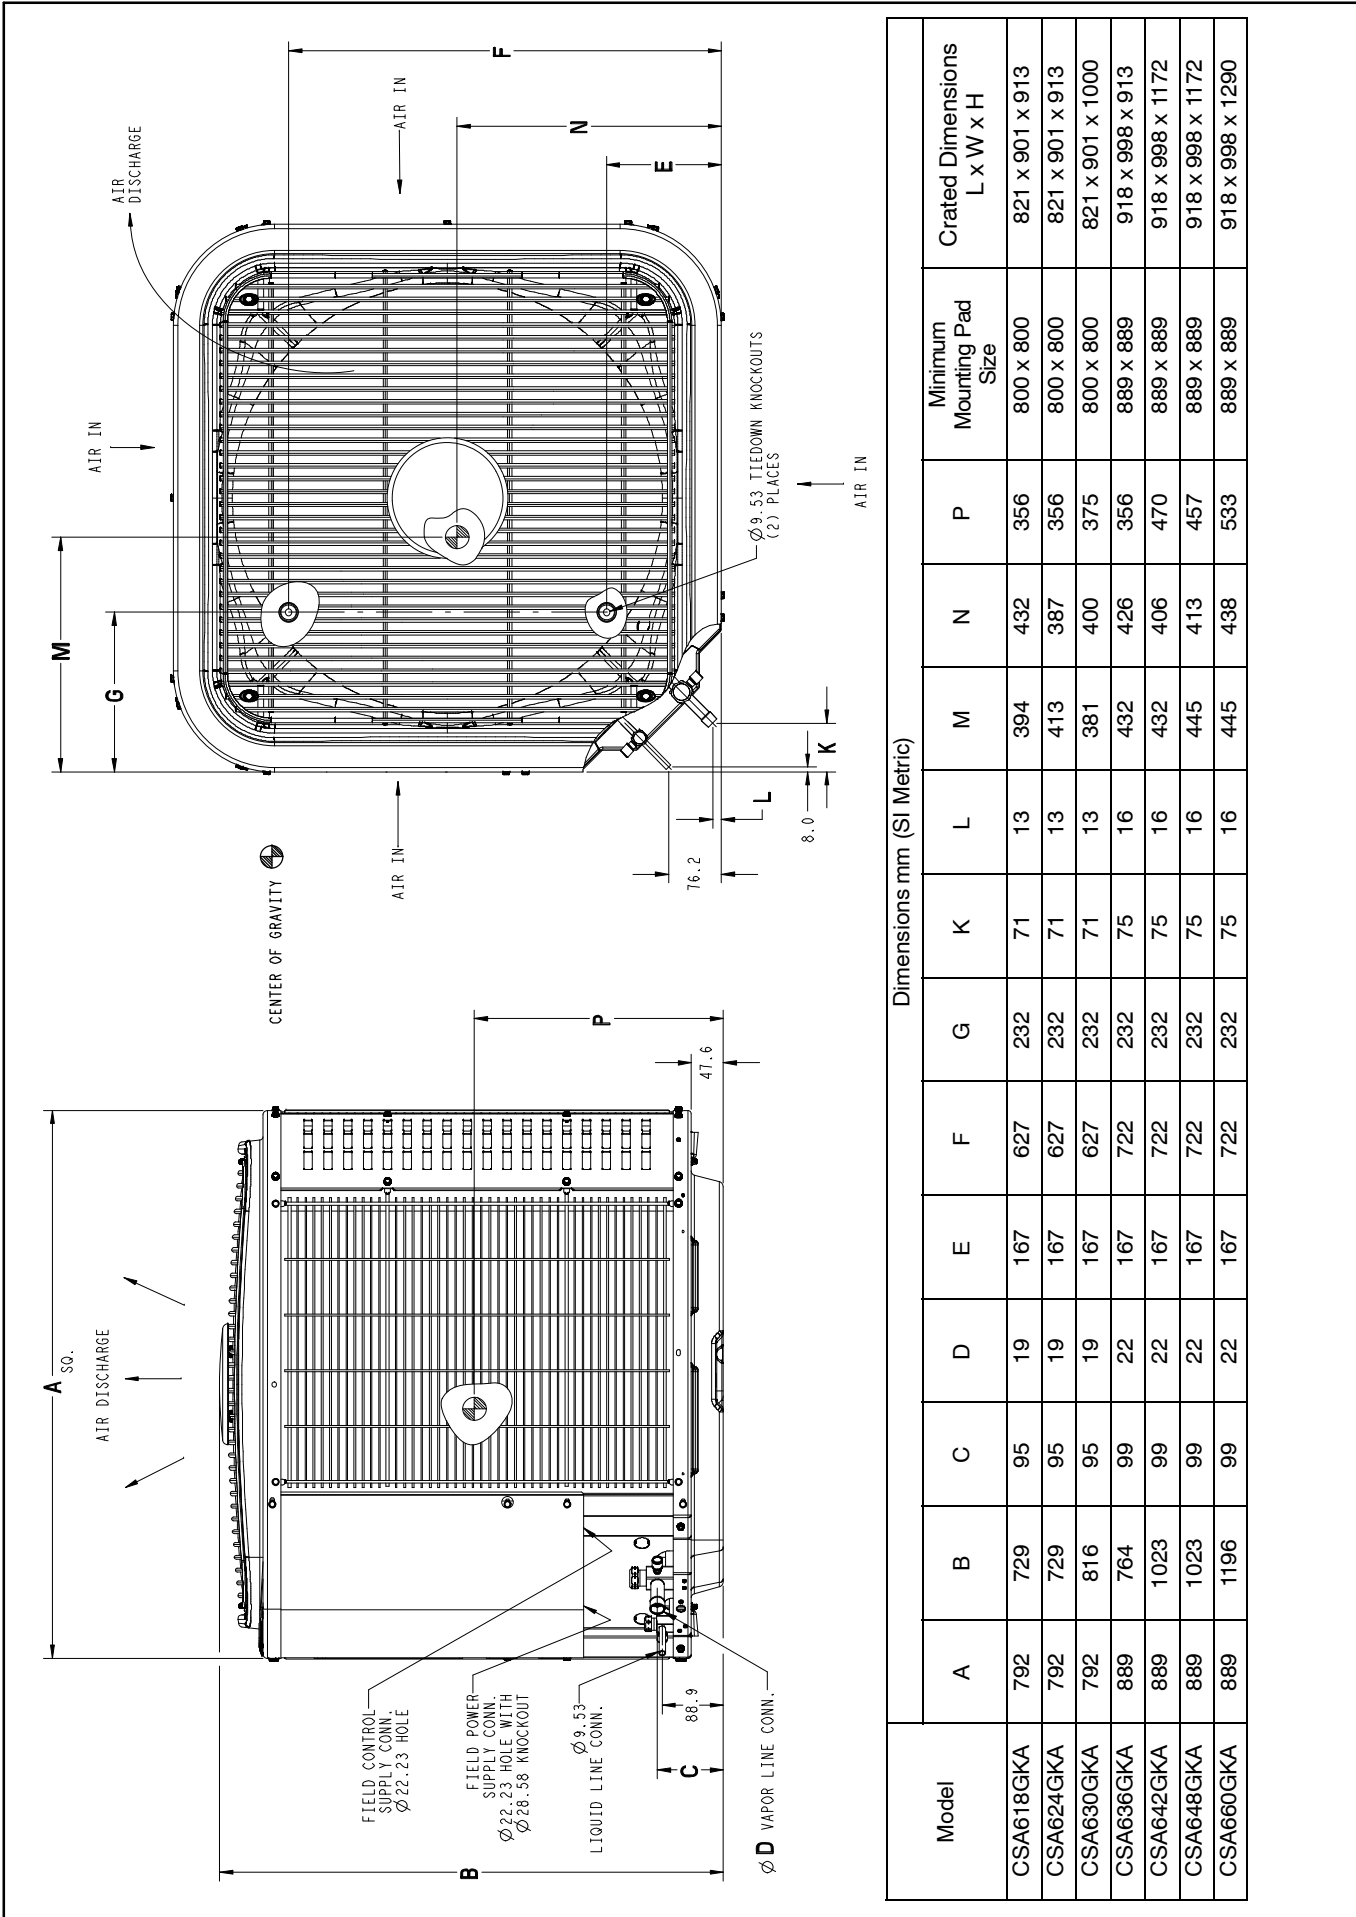

Dimensions mm (SI Metric)

Model	A	B	C	D	E	F	G	K	L	M	N	P	Minimum Mounting Pad Size	Crated Dimensions L x W x H
CSA618GKA	792	729	95	19	167	627	232	71	13	394	432	356	800 x 800	821 x 901 x 913
CSA624GKA	792	729	95	19	167	627	232	71	13	413	387	356	800 x 800	821 x 901 x 913
CSA630GKA	792	816	95	19	167	627	232	71	13	381	400	375	800 x 800	821 x 901 x 1000
CSA636GKA	889	764	99	22	167	722	232	75	16	432	426	356	889 x 889	918 x 998 x 913
CSA642GKA	889	1023	99	22	167	722	232	75	16	432	406	470	889 x 889	918 x 998 x 1172
CSA648GKA	889	1023	99	22	167	722	232	75	16	445	413	457	889 x 889	918 x 998 x 1172
CSA660GKA	889	1196	99	22	167	722	232	75	16	445	438	533	889 x 889	918 x 998 x 1290

PHYSICAL DATA							
Model Size	18	24	30	36	42	48	60
Compressor Type	Scroll						
REFRIGERANT	R-410A						
Control	TXV (R-410A Hard Shutoff)						
Charge lb (Kg)	5.25 (2.38)	6.00 (2.72)	6.81 (3.09)	6.75 (3.06)	8.62 (3.91)	13.00 (5.9)	14.50 (6.58)
COND FAN	Propeller Type, Direct Drive						
Air Discharge	Vertical						
Air Qty (CFM)	2233	2614	2614	3223	3810	4046	4046
Motor HP	1/12	1/10	1/10	1/12	1/5	1/4	1/4
Motor RPM	800	800	800	800	800	800	800
COND COIL							
Face Area (Sq ft)	15.07	15.07	17.22	17.58	25.12	25.12	30.14
Fins per In.	25	25	25	25	25	20	20
Rows	1	1	1	1	1	2	2
Circuits	3	4	4	4	6	7	8
VALVE CONNECT. (In. ID)							
Vapor	3/4	3/4	3/4	7/8	7/8	7/8	7/8
Liquid	3/8	3/8	3/8	3/8	3/8	3/8	3/8
REFRIGERANT TUBES (In. OD)							
Rated Vapor*	3/4			7/8			1-1/8
Max Liquid Line	3/8"						

*Units are rated with 25 ft (7.6 m) of lineset length. See Vapor Line Sizing and Cooling Capacity Loss table when using other sizes and lengths of lineset.

NOTE: See unit Installation Instruction for proper installation.

ELECTRICAL DATA												
UNIT SIZE	V/PH/Hz	Operating Volts*		Compressor		Fan	MCA	Min-Wire Size†	Min-Wire Size†	Max Length ft (m)‡	Max Length ft (m)‡	Max Fuse** or Ckt Brk AMPS
		Max	Min	LRA	RLA	FLA		60° C	75° C	60° C	75° C	
18	208-230/1/60	253	197	48.0	9.0	0.5	11.8	14	14	66 (20.12)	62 (18.90)	20
24				58.3	13.5	0.7	17.6	14	14	44 (13.41)	42 (12.80)	25
30				64.0	12.8	0.5	16.7	14	14	46 (14.02)	44 (13.41)	25
36				77.0	14.1	0.5	18.1	14	14	44 (13.41)	42 (12.80)	30
42				112.0	17.9	1.2	23.6	12	12	52 (15.85)	50 (15.24)	40
48				109.0	19.9	1.2	26.1	10	10	77 (23.47)	73 (22.25)	40
60				135.0	21.4	1.2	28.0	10	10	71 (21.64)	68 (20.73)	40

* Permissible limits of the voltage range at which the unit will operate satisfactorily

† If wire is applied at ambient greater than 30°C, consult table 310-16 of the NEC (NFPA 70). The ampacity of non-metallic-sheathed cable (NM), trade name ROMEX, shall be that of 60°C conditions, per the NEC (NFPA 70) Article 336-26. If other than uncoated (no-plated), 60 or 75°C insulation, copper wire (solid wire for 10 AWG or smaller, stranded wire for larger than 10 AWG) is used, consult applicable tables of the NEC (NFPA 70).

‡ Length shown is as measured one way along wire path between unit and service panel for voltage drop not to exceed 2%.

** Time-Delay fuse.

FLA - Full Load Amps

LRA - Locked Rotor Amps

MCA - Minimum Circuit Amps

RLA - Rated Load Amps

NOTE: Control circuit is 24-V on all units and requires external power source. Copper wire must be used from service disconnect to unit.

All motors/compressors contain internal overload protection.

Complies with 2007 requirements of ASHRAE Standards 90.1

A-WEIGHTED SOUND POWER (dBA)								
UNIT SIZE - SERIES	STANDARD RATING	TYPICAL OCTAVE BAND SPECTRUM (without tone adjustment)						
		125	250	500	1000	2000	4000	8000
18	69	53.0	58.0	62.5	63.0	60.5	58.0	48.5
24	69	49.0	57.0	62.5	62.5	59.0	56.5	49.5
30	70	53.5	56.0	62.5	64.5	62.0	57.0	49.5
36	70	54.5	64.5	69.5	70.0	68.0	65.5	60.0
42	72	61.0	67.5	72.5	73.5	71.0	67.5	62.0
48	72	56.5	60.0	63.5	64.5	61.0	58.5	51.0
60	72	55.0	63.0	67.5	71.5	68.0	64.0	60.5

NOTE: Tested in accordance with AHRI Standard 270-08 (not listed in AHRI).

REFRIGERANT PIPING LENGTH LIMITATIONS

Liquid Line Sizing and Maximum Total Equivalent Lengths[†] for Cooling Only Systems with R-410A Refrigerant:

The maximum allowable length of a residential split system depends on the liquid line diameter and vertical separation between indoor and outdoor units.

See Table below for liquid line sizing and maximum lengths :

Maximum Total Equivalent Length Outdoor Unit BELOW Indoor Unit

Size	Liquid Line Connection	Liquid Line Diam. w/ TXV	AC with R-410A Refrigerant Maximum Total Equivalent Length [†] : Outdoor unit BELOW Indoor Vertical Separation ft (m)								
			0-5 (0-1.5)	6-10 (1.8-3.0)	11-20 (3.4-6.1)	21-30 (6.4-9.1)	31-40 (9.4-12.2)	41-50 (12.5-15.2)	51-60 (15.5-18.3)	61-70 (18.6-21.3)	71-80 (21.6-24.4)
18 AC with R-410A	3/8	1/4	150	150	125	100	100	75	--	--	--
		5/16	250*	250*	250*	250*	250*	250*	250*	225*	150
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
24 AC with R-410A	3/8	1/4	75	75	75	50	50	--	--	--	--
		5/16	250*	250*	250*	250*	250*	225*	175	125	100
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
30 AC with R-410A	3/8	1/4	30	--	--	--	--	--	--	--	--
		5/16	175	225*	200	175	125	100	75	--	--
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
36 AC with R-410A	3/8	5/16	175	150	150	100	100	100	75	--	--
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
42 AC with R-410A	3/8	5/16	125	100	100	75	75	50	--	--	--
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	150
48 AC with R-410A	3/8	3/8	250*	250*	250*	250*	250*	250*	230	160	--
60 AC with R-410A	3/8	3/8	250*	250*	250*	225*	190	150	110	--	--

* Maximum actual length not to exceed 200 ft (61 m)

† Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

-- = outside acceptable range

Maximum Total Equivalent Length Outdoor Unit ABOVE Indoor Unit

Size	Liquid Line Connection	Liquid Line Diam. w/ TXV	AC with R-410A Refrigerant Maximum Total Equivalent Length [†] : Outdoor unit ABOVE Indoor Vertical Separation ft (m)								
			25 (7.6)	26-50 (7.9-15.2)	51-75 (15.5-22.9)	76-100 (23.2-30.5)	101-125 (30.8-38.1)	126-150 (38.4-45.7)	151-175 (46.0-53.3)	176-200 (53.6-61.0)	
18 AC with R-410A	3/8	1/4	175	250*	250*	250*	250*	250*	250*	250*	250*
		5/16	250*	250*	250*	250*	250*	250*	250*	250*	250*
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
24 AC with R-410A	3/8	1/4	100	125	175	200	225*	250*	250*	250*	250*
		5/16	250*	250*	250*	250*	250*	250*	250*	250*	250*
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
30 AC with R-410A	3/8	1/4	30	--	--	--	--	--	--	--	--
		5/16	250*	250*	250*	250*	250*	250*	250*	250*	250*
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
36 AC with R-410A	3/8	5/16	225*	250*	250*	250*	250*	250*	250*	250*	250*
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
42 AC with R-410A	3/8	5/16	175	200	250*	250*	250*	250*	250*	250*	250*
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
48 AC with R-410A	3/8	3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
60 AC with R-410A	3/8	3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*

* Maximum actual length not to exceed 200 ft (61 m)

† Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

-- = outside acceptable range

CHARGING SUBCOOLING (TXV-TYPE EXPANSION DEVICE)

UNIT SIZE-SERIES	REQUIRED SUBCOOLING °F (°C)
18	10 (5.6)
24	10 (5.6)
30	10 (5.6)
36	10 (5.6)
42	9 (5.0)
48	10 (5.6)
60	9 (5.0)

REFRIGERANT CHARGE ADJUSTMENTS

Liquid Line Size	R-410A Charge oz/ft (g/m)
3/8	0.60 (17.74) (Factory charge for lineset = 9 oz / 266.16 g)
5/16	0.40 (11.83)
1/4	0.27 (7.98)

Units are factory charged for 15 ft (4.6 m) of 3/8" liquid line. The factory charge for 3/8" lineset 9 oz. When using other length or diameter liquid lines, charge adjustments are required per the chart above.

Charging Formula:

$[(\text{Lineset oz/ft} \times \text{total length}) - (\text{factory charge for lineset})] = \text{charge adjustment}$

Example 1: System has 15 ft of line set using existing 1/4" liquid line. What charge adjustment is required?

Formula: $(.27 \text{ oz/ft} \times 15\text{ft}) - (9 \text{ oz}) = (-4.95) \text{ oz.}$

Net result is to remove 4.95 oz of refrigerant from the system

Example 2: System has 45 ft of existing 5/16" liquid line. What is the charge adjustment?

Formula: $(.40 \text{ oz/ft.} \times 45\text{ft.}) - (9 \text{ oz.}) = 9 \text{ oz.}$

Net result is to add 9 oz of refrigerant to the system

LONG LINE APPLICATIONS

An application is considered Long Line, when the refrigerant level in the system requires the use of accessories to maintain acceptable refrigerant management for systems reliability. See Accessory Usage Guideline table for required accessories. Defining a system as long line depends on the liquid line diameter, actual length of the tubing, and vertical separation between the indoor and outdoor units. For Air Conditioner systems, the chart below shows when an application is considered Long Line.

AC WITH R-410A REFRIGERANT LONG LINE DESCRIPTION ft (m)

Beyond these lengths, long line accessories are required

Liquid Line Size	Units On Same Level	Outdoor Below Indoor	Outdoor Above Indoor
1/4	No accessories needed within allowed lengths	No accessories needed within allowed lengths	175 (53.3)
5/16	120 (36.6)	50 (15.2) vertical or 120 (36.6) total	120 (36.6)
3/8	80 (24.4)	35 (10.7) vertical or 80 (24.4) total	80 (24.4)

Note: See Long Line Guideline for details

VAPOR LINE SIZING AND COOLING CAPACITY LOSS

Acceptable vapor line diameters provide adequate oil return to the compressor while avoiding excessive capacity loss. The suction line diameters shown in the chart below are acceptable for AC systems with R-410A refrigerant:

Vapor Line Sizing and Cooling Capacity Losses — R-410A Refrigerant 1-Stage Air Conditioner Applications

Unit Nominal Size (Btuh)	Maximum Liquid Line Diameters (In. OD)	Vapor Line Diameters (In. OD)	Cooling Capacity Loss (%) Total Equivalent Line Length ft. (m)								
			26-50 (7.9-15.2)	51-80 (15.5-24.4)	81-100 (24.7-30.5)	101-125 (30.8-38.1)	126-150 (38.4-45.7)	151-175 (46.0-53.3)	176-200 (53.6-61.0)	201-225 (61.3-68.6)	226-250 (68.9-76.2)
018 1 Stage AC with R-410A	3/8	1/2	1	2	3	5	6	7	8	9	11
		5/8	0	1	1	1	2	2	2	3	3
		3/4	0	0	0	0	1	1	1	1	1
024 1 Stage AC with R-410A	3/8	5/8	0	1	2	2	3	3	4	5	5
		3/4	0	0	1	1	1	1	1	2	2
		7/8	0	0	0	0	0	1	1	1	1
030 1 Stage AC with R-410A	3/8	5/8	1	2	3	3	4	5	6	7	8
		3/4	0	0	1	1	1	2	2	2	3
		7/8	0	0	0	0	1	1	1	1	1
036 1 Stage AC with R-410A	3/8	5/8	1	2	4	5	6	8	9	10	12
		3/4	0	1	1	2	2	3	3	4	4
		7/8	0	0	0	1	1	1	1	2	2
042 1 Stage AC with R-410A	3/8	3/4	0	1	2	2	3	4	4	5	6
		7/8	0	0	1	1	1	2	2	2	3
		1 1/8	0	0	0	0	0	0	0	0	0
048 1 Stage AC with R-410A	3/8	3/4	0	1	2	3	4	5	5	6	7
		7/8	0	0	1	1	2	2	2	3	3
		1 1/8	0	0	0	0	0	0	0	1	1
060, 061 1 Stage AC with R-410A	3/8	3/4	1	2	4	5	6	7	9	10	11
		7/8	0	1	2	2	3	4	4	5	5
		1 1/8	0	0	0	1	1	1	1	1	1

Applications in this area may be long line and may have height restrictions. See the Residential Piping and Long Line Guideline.

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA618GKA	*EN(A,D)4X19*17**	18800	TXV		14.5		12.2	
	FCM4X24****	18800	TDR&TXV	16.5			13.5	
	FEA4X18**A*	18600	TDR&TXV	16			13	
	FEA4X24**A*	18900	TDR&TXV	16.5			13.5	
	FEA4X30**A*	18800	TDR&TXV	16			13	
	FEA4X36**A*	18900	TDR&TXV	16			13	
	FEM4P18**A*	18600	TDR			16	13	
	FEM4P24**A*	18600	TDR			16	13	
	FEM4P30**A*	18700	TDR			15	12.5	
	FEM4X18****	18800	TDR&TXV	16.5			13.5	
	FEM4X24****	18800	TDR&TXV	16			13.5	
	FS(M,U)4P18**A*	18500	TDR			15	12.5	
	FS(M,U)4P24**A*	18600	TDR			15	12.5	
	FSA4X18**A*	18300	TDR&TXV	14			12	
	FSA4X24**A*	18500	TDR&TXV	14.5			12	
	FVM4X24****	18800	TDR&TXV	16.5			13.7	
	FXM4X18**A*	19000	TDR&TXV	16.5			13.5	
	FXM4X24**A*	19000	TDR&TXV	16.5			13.5	
	FXM4X30**A*	19000	TDR&TXV	16			13	
	EA*4X18*14A*	18000	TDR&TXV	15.5			13	*8MV*0701412**
	EA*4X18*14A*	18300	TDR&TXV	16			13	*8MX*0451408**
	EA*4X18*14A*	18100	TDR&TXV	15			12.7	*9MV*0401410A**
	EA*4X18*14A*	17900	TDR&TXV	15			12.7	*9MX*0401410A**
	EA*4X18*14A*	18200	TDR&TXV	16			13.2	MV08B15**B*
	EA*4X18*14A*	18200	TXV		14.2		12	
	EA*4X24*14A*	18400	TDR&TXV	16			13	*8MV*0701412**
	EA*4X24*14A*	18800	TDR&TXV	16			13.5	*8MX*0451408**
	EA*4X24*14A*	18500	TDR&TXV	15.5			13	*9MV*0401410A**
	EA*4X24*14A*	18400	TDR&TXV	15.5			13	*9MX*0401410A**
	EA*4X24*14A*	18600	TDR&TXV	16.5			13.5	MV08B15**B*
	EA*4X24*14A*	18600	TXV		14.5		12	
	EA*4X24*17A*	18400	TDR&TXV	16			13	*8MV*0701412**
	EA*4X24*17A*	18400	TDR&TXV	16			13.5	*8MV*0901716**
	EA*4X24*17A*	18800	TDR&TXV	16			13.5	*8MX*0451408**
	EA*4X24*17A*	18400	TDR&TXV	16			13	*9MA*0601714A**
	EA*4X24*17A*	18300	TDR&TXV	16			13	*9MA*0801714A**
	EA*4X24*17A*	18600	TDR&TXV	15.5			13	*9MV*0401410A**
	EA*4X24*17A*	18800	TDR&TXV	16			13.2	*9MV*0601714A**
	EA*4X24*17A*	19000	TDR&TXV	16.5			13.5	*9MV*0801716A**
	EA*4X24*17A*	18400	TDR&TXV	15.5			13	*9MX*0401410A**
	EA*4X24*17A*	18600	TDR&TXV	16.5			13.5	MV08B15**B*
	EA*4X24*17A*	19200	TDR&TXV	16			13.2	*9MPV050
	EA*4X24*17A*	19200	TDR&TXV	16			13.2	*9MPV075
	EA*4X24*17A*	18800	TDR&TXV	16			13	OLV098A12A
	EA*4X24*17A*	18900	TDR&TXV	16			13.5	OMV098J12A

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE							
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .							
New ratings may be listed online before Specification Sheets are updated.							
Model Size	Indoor Model	AHRI STANDARD RATINGS					Furnace Model
		COOLING 95° F (35° C)					
		Capacity	Factory Enhance	SEER		EER	
Standard	TDR						
CSA618GKA	EA*4X24*17A*	18600	TXV		14.5	12	
	EA*4X30*14A*	18600	TDR&TXV	15.5		13	*9MV*0401410A**
	EA*4X30*14A*	18400	TDR&TXV	15.5		13	*9MX*0401410A**
	EA*4X30*17A*	18400	TDR&TXV	16		13	*9MA*0601714A**
	EA*4X30*17A*	18300	TDR&TXV	16		13	*9MA*0801714A**
	EA*4X30*17A*	18600	TDR&TXV	15.5		13	*9MV*0401410A**
	EA*4X30*17A*	18900	TDR&TXV	16		13.5	*9MV*0601714A**
	EA*4X30*17A*	19100	TDR&TXV	16.5		13.5	*9MV*0801716A**
	EA*4X30*17A*	18400	TDR&TXV	15.5		13	*9MX*0401410A**
	ED*4X18B**	18000	TDR&TXV	15.5		13	*8MV*0701412**
	ED*4X18B**	18300	TDR&TXV	15.5		13	*8MX*0451408**
	ED*4X18B**	18100	TDR&TXV	15.2		12.7	*9MV*0401410A**
	ED*4X18B**	17900	TDR&TXV	15.2		12.7	*9MX*0401410A**
	ED*4X18B**	18200	TDR&TXV	16		13.2	MV08B15**B*
	ED*4X18B**	18200	TXV		14	11.7	
	ED*4X24B**	18400	TDR&TXV	15.5		13.2	*8MV*0701412**
	ED*4X24B**	18800	TDR&TXV	16		13.5	*8MX*0451408**
	ED*4X24B**	18500	TDR&TXV	15.5		13	*9MV*0401410A**
	ED*4X24B**	18400	TDR&TXV	15.5		13	*9MX*0401410A**
	ED*4X24B**	18600	TDR&TXV	16		13.5	MV08B15**B*
	ED*4X24B**	18600	TXV		14.5	12	
	ED*4X24F**	18400	TDR&TXV	16		13.5	*8MV*0901716**
	ED*4X24F**	18400	TDR&TXV	16		13.2	*9MA*0601714A**
	ED*4X24F**	18300	TDR&TXV	16		13.2	*9MA*0801714A**
	ED*4X24F**	18800	TDR&TXV	16		13.5	*9MV*0601714A**
	ED*4X24F**	19000	TDR&TXV	16.5		13.5	*9MV*0801716A**
	ED*4X24F**	19100	TDR&TXV	16.5		13.5	*9MV*1002116A**
	ED*4X24F**	18600	TDR&TXV	16.5		13.5	MV08B15**B*
	ED*4X24F**	19200	TDR&TXV	16		13.2	*9MPV050
	ED*4X24F**	19200	TDR&TXV	16		13.2	*9MPV075
	ED*4X24F**	19200	TDR&TXV	16		13.2	*9MVX040
	ED*4X24F**	19200	TDR&TXV	16		13.2	*9MVX060
	ED*4X24F**	18800	TDR&TXV	16		13.5	OLV098A12A
	ED*4X24F**	18900	TDR&TXV	16		13.5	OMV098J12A
	ED*4X24F**	18600	TXV		14.5	12	
	EHD4X24A**	18500	TDR&TXV	16		13.5	*8MV*0701412**
	EHD4X24A**	18600	TDR&TXV	16		13.5	*8MV*0901716**
	EHD4X24A**	18800	TDR&TXV	16		13.5	*8MX*0451408**
	EHD4X24A**	18600	TDR&TXV	16		13	*9MA*0601714A**
	EHD4X24A**	18500	TDR&TXV	16		13	*9MA*0801714A**
EHD4X24A**	18600	TDR&TXV	15.5		13	*9MV*0401410A**	
EHD4X24A**	18600	TDR&TXV	16		13	*9MV*0601714A**	
EHD4X24A**	18700	TDR&TXV	16		13.5	*9MV*0801716A**	
EHD4X24A**	18900	TDR&TXV	16		13.5	*9MV*1002116A**	
EHD4X24A**	19000	TDR&TXV	16		13.5	*9MV*1202422A**	
EHD4X24A**	18400	TDR&TXV	15.5		13	*9MX*0401410A**	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE									
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .									
New ratings may be listed online before Specification Sheets are updated.									
Model Size	Indoor Model	AHRI STANDARD RATINGS					Furnace Model		
		COOLING 95° F (35° C)							
		Capacity	Factory Enhance	SEER		EER			
				Standard	TDR				
CSA618GKA	EHD4X24A**	18800	TDR&TXV	16.5		13.7	MV08B15**B*		
	EHD4X24A**	19200	TDR&TXV	16		13.2	*9MPV050		
	EHD4X24A**	19200	TDR&TXV	16		13.2	*9MPV075		
	EHD4X24A**	19300	TDR&TXV	16		13	*9MVX040		
	EHD4X24A**	19200	TDR&TXV	16		13	*9MVX060		
	EHD4X24A**	18900	TDR&TXV	16		13	OLV098A12A		
	EHD4X24A**	19100	TDR&TXV	16		13	OMV098J12A		
	EHD4X24A**	18800	TXV			14.5	12		
	EHD4X30A**	18600	TDR&TXV	16.5			13.2	*9MA*0601714A**	
	EHD4X30A**	18600	TDR&TXV	16.5			13.5	*9MA*0801714A**	
	EHD4X30A**	18800	TDR&TXV	16			13	*9MV*0401410A**	
	EHD4X30A**	19000	TDR&TXV	16.5			13.5	*9MV*0601714A**	
	EHD4X30A**	19100	TDR&TXV	16.5			13.5	*9MV*0801716A**	
	EHD4X30A**	19200	TDR&TXV	16.5			13.5	*9MV*1002116A**	
	EHD4X30A**	19400	TDR&TXV	16.5			13.5	*9MV*1202422A**	
	EHD4X30A**	18600	TDR&TXV	16			13	*9MX*0401410A**	
	EN(A,D)4X18*14**	18300	TDR&TXV	16			13	*8MV*0701412**	
	EN(A,D)4X18*14**	18500	TDR&TXV	16			13	*8MX*0451408**	
	EN(A,D)4X18*14**	18200	TDR&TXV	15.5			12.7	*9MV*0401410A**	
	EN(A,D)4X18*14**	18100	TDR&TXV	15.5			12.7	*9MX*0401410A**	
	EN(A,D)4X18*14**	18500	TDR&TXV	16			13.5	MV08B15**B*	
	EN(A,D)4X18*14**	18500	TXV				14.5	12	
	EN(A,D)4X19*17**	18500	TDR&TXV	16			13.5	*8MV*0701412**	
	EN(A,D)4X19*17**	18600	TDR&TXV	16.5			13.5	*8MV*0901716**	
	EN(A,D)4X19*17**	19000	TDR&TXV	16.5			13.5	*8MX*0451408**	
	EN(A,D)4X19*17**	18600	TDR&TXV	16			13.2	*9MA*0601714A**	
	EN(A,D)4X19*17**	18500	TDR&TXV	16			13.5	*9MA*0801714A**	
	EN(A,D)4X19*17**	18700	TDR&TXV	16			13	*9MV*0401410A**	
	EN(A,D)4X19*17**	19000	TDR&TXV	16.5			13.5	*9MV*0601714A**	
	EN(A,D)4X19*17**	19200	TDR&TXV	16.5			13.5	*9MV*0801716A**	
	EN(A,D)4X19*17**	18500	TDR&TXV	16			13	*9MX*0401410A**	
	EN(A,D)4X19*17**	18800	TDR&TXV	16.5			13.7	MV08B15**B*	
	EN(A,D)4X19*17**	19400	TDR&TXV	16			13.5	*9MPV050	
	EN(A,D)4X19*17**	19400	TDR&TXV	16			13.5	*9MPV075	
	EN(A,D)4X19*17**	19400	TDR&TXV	16			13	*9MVX040	
	EN(A,D)4X19*17**	19500	TDR&TXV	16			13.5	*9MVX060	
	EN(A,D)4X19*17**	18900	TDR&TXV	16.5			13.5	OLV098A12A	
	EN(A,D)4X19*17**	19100	TDR&TXV	16			13.5	OMV098J12A	
	EN(A,D)4X24*14**	18400	TDR&TXV	16			13	*8MV*0701412**	
	EN(A,D)4X24*14**	18700	TDR&TXV	16			13.5	*8MX*0451408**	
	EN(A,D)4X24*14**	18500	TDR&TXV	15.5			13	*9MV*0401410A**	
	EN(A,D)4X24*14**	18300	TDR&TXV	15.5			13	*9MX*0401410A**	
EN(A,D)4X24*14**	18600	TDR&TXV	16.5			13.5	MV08B15**B*		

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.
 † For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.

New ratings may be listed online before Specification Sheets are updated.

Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA618GKA	EN(A,D)4X24*14**	18600	TXV		14.5		12	
	EN(A,D)4X24*17**	18400	TDR&TXV	16			13	*8MV*0701412**
	EN(A,D)4X24*17**	18500	TDR&TXV	16			13.5	*8MV*0901716**
	EN(A,D)4X24*17**	18700	TDR&TXV	16			13	*8MX*0451408**
	EN(A,D)4X24*17**	18400	TDR&TXV	16			13	*9MA*0601714A**
	EN(A,D)4X24*17**	18400	TDR&TXV	16			13	*9MA*0801714A**
	EN(A,D)4X24*17**	18500	TDR&TXV	15.5			13	*9MV*0401410A**
	EN(A,D)4X24*17**	18600	TDR&TXV	16			13	*9MV*0601714A**
	EN(A,D)4X24*17**	18800	TDR&TXV	16			13.5	*9MV*0801716A**
	EN(A,D)4X24*17**	18300	TDR&TXV	15.5			13	*9MX*0401410A**
	EN(A,D)4X24*17**	18600	TDR&TXV	16.5			13.5	MV08B15**B*
	EN(A,D)4X24*17**	19100	TDR&TXV	16			13.2	*9MPV050
	EN(A,D)4X24*17**	19100	TDR&TXV	16			13.2	*9MPV075
	EN(A,D)4X24*17**	19100	TDR&TXV	15.5			13	*9MVX040
	EN(A,D)4X24*17**	19100	TDR&TXV	16			13	*9MVX060
	EN(A,D)4X24*17**	18800	TDR&TXV	16			13	OLV098A12A
	EN(A,D)4X24*17**	19000	TDR&TXV	16			13	OMV098J12A
	EN(A,D)4X24*17**	18600	TXV		14.5		12	
	EN(A,D)4X30*14**	18600	TDR&TXV	15.5			13	*9MV*0401410A**
	EN(A,D)4X30*14**	18400	TDR&TXV	15.5			13	*9MX*0401410A**
	EN(A,D)4X30*17**	18400	TDR&TXV	16			13	*9MA*0601714A**
	EN(A,D)4X30*17**	18300	TDR&TXV	16			13	*9MA*0801714A**
	EN(A,D)4X30*17**	18600	TDR&TXV	15.5			13	*9MV*0401410A**
	EN(A,D)4X30*17**	18900	TDR&TXV	16			13.5	*9MV*0601714A**
	EN(A,D)4X30*17**	19100	TDR&TXV	16.5			13.5	*9MV*0801716A**
	EN(A,D)4X30*17**	18500	TDR&TXV	16			13	*9MX*0401410A**
	ENH4X24*17**	18400	TDR&TXV	16			13	*8MV*0701412**
	ENH4X24*17**	18500	TDR&TXV	16			13.5	*8MV*0901716**
	ENH4X24*17**	18700	TDR&TXV	16			13	*8MX*0451408**
	ENH4X24*17**	18400	TDR&TXV	16			13	*9MA*0601714A**
	ENH4X24*17**	18400	TDR&TXV	16			13	*9MA*0801714A**
	ENH4X24*17**	18500	TDR&TXV	15.5			13	*9MV*0401410A**
	ENH4X24*17**	18600	TDR&TXV	16			13	*9MV*0601714A**
	ENH4X24*17**	18800	TDR&TXV	16			13.5	*9MV*0801716A**
	ENH4X24*17**	18900	TDR&TXV	16			13.5	*9MV*1002116A**
	ENH4X24*17**	19000	TDR&TXV	16			13.5	*9MV*1202422A**
	ENH4X24*17**	18300	TDR&TXV	15.5			13	*9MX*0401410A**
	ENH4X24*17**	18600	TDR&TXV	16.5			13.5	MV08B15**B*
	ENH4X24*17**	19100	TDR&TXV	16			13.2	*9MPV050
	ENH4X24*17**	19100	TDR&TXV	16			13.2	*9MPV075
	ENH4X24*17**	19100	TDR&TXV	16			13	*9MVX040
	ENH4X24*17**	19100	TDR&TXV	16			13	*9MVX060
	ENH4X24*17**	18800	TDR&TXV	16			13	OLV098A12A
	ENH4X24*17**	19000	TDR&TXV	16			13	OMV098J12A
	ENH4X24*17**	18600	TXV		14.5		12	
	ENH4X30*17**	18400	TDR&TXV	16			13	*9MA*0601714A**
	ENH4X30*17**	18300	TDR&TXV	16			13	*9MA*0801714A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org . New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA618GKA	ENH4X30*17**	18600	TDR&TXV	15.5			13	*9MV*0401410A**
	ENH4X30*17**	18900	TDR&TXV	16.5			13.5	*9MV*0601714A**
	ENH4X30*17**	19100	TDR&TXV	16.5			13.5	*9MV*0801716A**
	ENH4X30*17**	19200	TDR&TXV	16.5			13.5	*9MV*1002116A**
	ENH4X30*17**	19300	TDR&TXV	16.5			13.5	*9MV*1202422A**
	ENH4X30*17**	18500	TDR&TXV	16			13	*9MX*0401410A**
* Tested Combo								
2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher. † For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device								

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA624GKA	*EN(A,D)4X31*17**	23600	TXV			14.5	12	
	FCM4X24****	23200	TDR&TXV	16			13	
	FCM4X36****	23200	TDR&TXV	16			13	
	FEA4X24**A*	23200	TDR&TXV	15			12.5	
	FEA4X30**A*	23200	TDR&TXV	15			12.5	
	FEA4X36**A*	23400	TDR&TXV	15.5			12.5	
	FEM4P24**A*	22800	TDR		15		12	
	FEM4P30**A*	23400	TDR		16		13	
	FEM4P36**A*	22800	TDR		13.5		11	
	FEM4X24****	23400	TDR&TXV	15.5			12.7	
	FEM4X30****	23600	TDR&TXV	15.5			13	
	FS(M,U)4P24**A*	23200	TDR		15		12	
	FS(M,U)4P30**A*	23400	TDR		15		12	
	FSA4X24**A*	22800	TDR&TXV	13.5			11.5	
	FSA4X30**A*	22800	TDR&TXV	13.5			11.5	
	FSA4X36**A*	23000	TDR&TXV	13.5			11.2	
	FVM4X24****	23400	TDR&TXV	16			13.2	
	FVM4X36****	23400	TDR&TXV	16			13.2	
	FXM4X24**A*	23400	TDR&TXV	16			13	
	FXM4X30**A*	23600	TDR&TXV	15.5			12.5	
	FXM4X36**A*	24000	TDR&TXV	16			13	
	EA*4X24*14A*	22800	TDR&TXV	15.5			12.5	*8MV*0701412**
	EA*4X24*14A*	23000	TDR&TXV	15.5			12.5	*8MX*0451408**
	EA*4X24*14A*	22800	TDR&TXV	14.5			12	*9MV*0401410A**
	EA*4X24*14A*	23200	TDR&TXV	14.5			12	*9MX*0401410A**
	EA*4X24*14A*	23200	TDR&TXV	16			13.2	MV08B15**B*
	EA*4X24*14A*	23000	TXV			14	11.5	
	EA*4X24*17A*	22800	TDR&TXV	15.5			12.5	*8MV*0701412**
	EA*4X24*17A*	22800	TDR&TXV	16			13	*8MV*0901716**
	EA*4X24*17A*	23000	TDR&TXV	15.5			12.5	*8MX*0451408**
	EA*4X24*17A*	23000	TDR&TXV	15.5			12.7	*9MA*0601714A**
	EA*4X24*17A*	23000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EA*4X24*17A*	23000	TDR&TXV	15			12	*9MV*0401410A**
	EA*4X24*17A*	23000	TDR&TXV	15.5			12.7	*9MV*0601714A**
	EA*4X24*17A*	23200	TDR&TXV	16			13	*9MV*0801716A**
	EA*4X24*17A*	23200	TDR&TXV	14.5			12	*9MX*0401410A**
	EA*4X24*17A*	23000	TDR&TXV	15.5			13	*9MX*0601714A**
	EA*4X24*17A*	23200	TDR&TXV	16			13.2	MV08B15**B*
	EA*4X24*17A*	23200	TDR&TXV	15.2			12.5	*9MPV050
	EA*4X24*17A*	23400	TDR&TXV	15.2			12.5	*9MPV075
	EA*4X24*17A*	23000	TDR&TXV	15.5			12.5	OLV098A12A
	EA*4X24*17A*	23200	TDR&TXV	15.5			12.5	OMV098J12A
	EA*4X24*17A*	23000	TDR&TXV	16			13	OMV112K14A
	EA*4X24*17A*	23000	TXV			14	11.5	
	EA*4X30*14A*	22800	TDR&TXV	16			13	*8MV*0701412**
	EA*4X30*14A*	23200	TDR&TXV	15.5			12.5	*8MX*0451408**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA624GKA	EA*4X30*14A*	23000	TDR&TXV	15			12	*9MV*0401410A**
	EA*4X30*14A*	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	EA*4X30*14A*	23400	TDR&TXV	16			13.2	MV08B15**B*
	EA*4X30*14A*	23200	TXV			14.2	11.7	
	EA*4X30*17A*	23000	TDR&TXV	16			13	*8MV*0701412**
	EA*4X30*17A*	23000	TDR&TXV	16			13	*8MV*0901716**
	EA*4X30*17A*	23200	TDR&TXV	16			13	*8MX*0451408**
	EA*4X30*17A*	23200	TDR&TXV	15.5			12.5	*9MA*0601714A**
	EA*4X30*17A*	23000	TDR&TXV	16			13	*9MA*0801714A**
	EA*4X30*17A*	23200	TDR&TXV	15			12	*9MV*0401410A**
	EA*4X30*17A*	23200	TDR&TXV	16			13	*9MV*0601714A**
	EA*4X30*17A*	23400	TDR&TXV	16			13	*9MV*0801716A**
	EA*4X30*17A*	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	EA*4X30*17A*	23400	TDR&TXV	16			13	*9MX*0601714A**
	EA*4X30*17A*	23400	TDR&TXV	16			13.2	MV08B15**B*
	EA*4X30*17A*	23400	TDR&TXV	16			13.2	MV12F19**B*
	EA*4X30*17A*	23400	TDR&TXV	15.5			12.7	*9MPV050
	EA*4X30*17A*	23600	TDR&TXV	15.5			12.7	*9MPV075
	EA*4X30*17A*	23200	TDR&TXV	16			13	OLV098A12A
	EA*4X30*17A*	23400	TDR&TXV	15.5			13	OMV098J12A
	EA*4X30*17A*	23000	TDR&TXV	16			13	OMV112K14A
	EA*4X30*17A*	23200	TXV			14.2	11.7	
	EA*4X36*14A*	23000	TDR&TXV	16			13	*8MV*0701412**
	EA*4X36*14A*	23200	TDR&TXV	16			13	*8MX*0451408**
	EA*4X36*14A*	23200	TDR&TXV	15			12	*9MV*0401410A**
	EA*4X36*14A*	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	EA*4X36*14A*	23200	TXV			14.2	11.7	
	EA*4X36*17A*	23000	TDR&TXV	16			13	*8MV*0701412**
	EA*4X36*17A*	23000	TDR&TXV	16			13	*8MV*0901716**
	EA*4X36*17A*	23400	TDR&TXV	16			13	*8MX*0451408**
	EA*4X36*17A*	23200	TDR&TXV	16			13	*9MA*0601714A**
	EA*4X36*17A*	23200	TDR&TXV	16			13	*9MA*0801714A**
	EA*4X36*17A*	23200	TDR&TXV	15.2			12	*9MV*0401410A**
	EA*4X36*17A*	23400	TDR&TXV	16			13	*9MV*0601714A**
	EA*4X36*17A*	23400	TDR&TXV	16			13	*9MV*0801716A**
	EA*4X36*17A*	23600	TDR&TXV	14.5			12	*9MX*0401410A**
	EA*4X36*17A*	23400	TDR&TXV	16			13	*9MX*0601714A**
	EA*4X36*17A*	23200	TXV			14.2	11.7	
	EA*4X36*21A*	23000	TDR&TXV	16			13	*8MV*0901716**
	EA*4X36*21A*	23200	TDR&TXV	16			13	*8MV*1102120**
	EA*4X36*21A*	23200	TDR&TXV	16			13	*9MA*0601714A**
	EA*4X36*21A*	23200	TDR&TXV	16			13	*9MA*0801714A**
	EA*4X36*21A*	23400	TDR&TXV	16			13	*9MA*1002120A**
	EA*4X36*21A*	23400	TDR&TXV	16			13	*9MV*0601714A**
	EA*4X36*21A*	23600	TDR&TXV	16			13	*9MV*0801716A**
	EA*4X36*21A*	23600	TDR&TXV	16			13	*9MV*1002116A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA624GKA	EA*4X36*21A*	23400	TDR&TXV	16			13	*9MX*0601714A**
	EA*4X36*21A*	23200	TXV			14.2	11.7	
	ED*4X24B**	23000	TDR&TXV	15.5			12.7	*8MV*0701412**
	ED*4X24B**	23200	TDR&TXV	15.5			12.7	*8MX*0451408**
	ED*4X24B**	22800	TDR&TXV	14.5			12	*9MV*0401410A**
	ED*4X24B**	23200	TDR&TXV	14.5			12	*9MX*0401410A**
	ED*4X24B**	23200	TDR&TXV	16			13.2	MV08B15**B*
	ED*4X24B**	23200	TXV			14	11.5	
	ED*4X24F**	23000	TDR&TXV	16			13	*8MV*0901716**
	ED*4X24F**	23000	TDR&TXV	15.5			13	*8MV*1102120**
	ED*4X24F**	23000	TDR&TXV	15.5			12.7	*9MA*0601714A**
	ED*4X24F**	23000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	ED*4X24F**	23200	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ED*4X24F**	23000	TDR&TXV	15.5			12.7	*9MV*0601714A**
	ED*4X24F**	23200	TDR&TXV	15.5			12.7	*9MV*0801716A**
	ED*4X24F**	23000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	ED*4X24F**	23000	TDR&TXV	15.5			12.7	*9MX*0601714A**
	ED*4X24F**	23200	TDR&TXV	16			13.2	MV08B15**B*
	ED*4X24F**	23200	TDR&TXV	16			13.2	MV12F19**B*
	ED*4X24F**	23200	TDR&TXV	15.2			12.5	*9MPV050
	ED*4X24F**	23400	TDR&TXV	15.2			12.5	*9MPV075
	ED*4X24F**	23200	TDR&TXV	15.2			12.5	*9MVX040
	ED*4X24F**	23400	TDR&TXV	15.2			12.7	*9MVX060
	ED*4X24F**	23200	TDR&TXV	15.5			12.7	OLV098A12A
	ED*4X24F**	23200	TDR&TXV	15.5			12.7	OMV098J12A
	ED*4X24F**	23200	TDR&TXV	16			13	OMV112K14A
	ED*4X24F**	23200	TXV			14	11.5	
	ED*4X30B**	23000	TDR&TXV	15.5			12.7	*8MV*0701412**
	ED*4X30B**	23400	TDR&TXV	15.5			12.7	*8MX*0451408**
	ED*4X30B**	23000	TDR&TXV	14.5			12.2	*9MV*0401410A**
	ED*4X30B**	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	ED*4X30B**	23400	TDR&TXV	16			13.2	MV08B15**B*
	ED*4X30B**	23400	TXV			14	11.7	
	ED*4X30F**	23200	TDR&TXV	16			13	*8MV*0901716**
	ED*4X30F**	23200	TDR&TXV	16			13	*8MV*1102120**
	ED*4X30F**	23200	TDR&TXV	15.5			12.7	*9MA*0601714A**
	ED*4X30F**	23000	TDR&TXV	15.5			13	*9MA*0801714A**
	ED*4X30F**	23400	TDR&TXV	16			13	*9MA*1002120A**
	ED*4X30F**	23200	TDR&TXV	15.5			12.7	*9MV*0601714A**
	ED*4X30F**	23400	TDR&TXV	16			13	*9MV*0801716A**
ED*4X30F**	23200	TDR&TXV	16			13	*9MV*1002116A**	
ED*4X30F**	23400	TDR&TXV	15.5			13	*9MX*0601714A**	
ED*4X30F**	23400	TDR&TXV	16			13.2	MV08B15**B*	
ED*4X30F**	23400	TDR&TXV	16			13.2	MV12F19**B*	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA624GKA	ED*4X30F**	23400	TDR&TXV	15.5			12.7	*9MPV050
	ED*4X30F**	23600	TDR&TXV	15.5			12.7	*9MPV075
	ED*4X30F**	23400	TDR&TXV	15.5			12.7	*9MVX040
	ED*4X30F**	23800	TDR&TXV	15.5			12.7	*9MVX060
	ED*4X30F**	23400	TDR&TXV	16			13	OLV098A12A
	ED*4X30F**	23400	TDR&TXV	15.5			12.7	OMV098J12A
	ED*4X30F**	23200	TDR&TXV	16			13.2	OMV112K14A
	ED*4X30F**	23400	TXV			14	11.7	
	ED*4X36F**	23200	TDR&TXV	16			13	*9MA*0601714A**
	ED*4X36F**	23200	TDR&TXV	16			13	*9MA*0801714A**
	ED*4X36F**	23400	TDR&TXV	16			13	*9MA*1002120A**
	ED*4X36F**	23400	TDR&TXV	16			13	*9MV*0601714A**
	ED*4X36F**	23400	TDR&TXV	16			13	*9MV*0801716A**
	ED*4X36F**	23400	TDR&TXV	16			13	*9MV*1002116A**
	ED*4X36F**	23400	TDR&TXV	16			13	*9MX*0601714A**
	ED*4X36F**	23200	TXV			14.2	11.7	
	EHD4X24A**	23000	TDR&TXV	15.5			13	*8MV*0701412**
	EHD4X24A**	23200	TDR&TXV	16			13	*8MV*0901716**
	EHD4X24A**	23000	TDR&TXV	15.5			12.5	*8MV*1102120**
	EHD4X24A**	23200	TDR&TXV	16			13	*8MV*1352422**
	EHD4X24A**	23200	TDR&TXV	15.5			12.5	*8MX*0451408**
	EHD4X24A**	23200	TDR&TXV	15.5			12.7	*9MA*0601714A**
	EHD4X24A**	23200	TDR&TXV	15.5			13	*9MA*0801714A**
	EHD4X24A**	23600	TDR&TXV	15.5			13	*9MA*1002120A**
	EHD4X24A**	23400	TDR&TXV	16			13	*9MA*1202422A**
	EHD4X24A**	23000	TDR&TXV	15			12	*9MV*0401410A**
	EHD4X24A**	23000	TDR&TXV	15.5			12.5	*9MV*0601714A**
	EHD4X24A**	23200	TDR&TXV	16			13	*9MV*0801716A**
	EHD4X24A**	22800	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EHD4X24A**	23000	TDR&TXV	16			13	*9MV*1202422A**
	EHD4X24A**	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	EHD4X24A**	23000	TDR&TXV	15.5			12.7	*9MX*0601714A**
	EHD4X24A**	23600	TDR&TXV	16			13.2	MV08B15**B*
	EHD4X24A**	23600	TDR&TXV	16			13.2	MV12F19**B*
	EHD4X24A**	23200	TDR&TXV	15.2			12.5	*9MPV050
	EHD4X24A**	23400	TDR&TXV	15.2			12.5	*9MPV075
	EHD4X24A**	23600	TDR&TXV	15.5			12.7	*9MPV100
	EHD4X24A**	23600	TDR&TXV	15.5			12.7	*9MPV125
	EHD4X24A**	23200	TDR&TXV	15.2			12.5	*9MVX040
	EHD4X24A**	23200	TDR&TXV	15.2			12.5	*9MVX060
	EHD4X24A**	23600	TDR&TXV	15.5			12.5	*9MVX080
	EHD4X24A**	23400	TDR&TXV	15.5			12.5	*9MVX100
	EHD4X24A**	23200	TDR&TXV	15.5			12.5	OLV098A12A
	EHD4X24A**	23400	TDR&TXV	15.5			12.5	OMV098J12A

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA624GKA	EHD4X24A**	23200	TDR&TXV	15.5			13	OMV112K14A
	EHD4X24A**	23200	TXV			14.5	12	
	EHD4X30A**	23000	TDR&TXV	16			13	*8MV*0701412**
	EHD4X30A**	23200	TDR&TXV	16			13	*8MV*0901716**
	EHD4X30A**	23200	TDR&TXV	16			13	*8MV*1102120**
	EHD4X30A**	23200	TDR&TXV	16			13	*8MV*1352422**
	EHD4X30A**	23200	TDR&TXV	16			13	*8MX*0451408**
	EHD4X30A**	23400	TDR&TXV	16			13	*9MA*0601714A**
	EHD4X30A**	23200	TDR&TXV	16			13	*9MA*0801714A**
	EHD4X30A**	23600	TDR&TXV	16			13	*9MA*1002120A**
	EHD4X30A**	23600	TDR&TXV	16			13	*9MA*1202422A**
	EHD4X30A**	23200	TDR&TXV	15			12	*9MV*0401410A**
	EHD4X30A**	23200	TDR&TXV	16			13	*9MV*0601714A**
	EHD4X30A**	23400	TDR&TXV	16			13	*9MV*0801716A**
	EHD4X30A**	23200	TDR&TXV	16			13	*9MV*1002116A**
	EHD4X30A**	23400	TDR&TXV	16			13	*9MV*1202422A**
	EHD4X30A**	23600	TDR&TXV	14.5			12	*9MX*0401410A**
	EHD4X30A**	23400	TDR&TXV	16			13	*9MX*0601714A**
	EHD4X30A**	23600	TDR&TXV	16			13.2	MV08B15**B*
	EHD4X30A**	23600	TDR&TXV	16			13.2	MV12F19**B*
	EHD4X30A**	23600	TDR&TXV	15.5			12.7	*9MPV050
	EHD4X30A**	23600	TDR&TXV	15.5			12.7	*9MPV075
	EHD4X30A**	24000	TDR&TXV	15.5			12.7	*9MPV100
	EHD4X30A**	24000	TDR&TXV	16			13	*9MPV125
	EHD4X30A**	23400	TDR&TXV	15.5			12.5	*9MVX040
	EHD4X30A**	23600	TDR&TXV	15.5			12.5	*9MVX060
	EHD4X30A**	23800	TDR&TXV	16			13	*9MVX080
	EHD4X30A**	23800	TDR&TXV	16			13	*9MVX100
	EHD4X30A**	23400	TDR&TXV	15.5			13	OLV098A12A
	EHD4X30A**	23400	TDR&TXV	15.5			12.5	OMV098J12A
	EHD4X30A**	23200	TDR&TXV	16			13	OMV112K14A
	EHD4X30A**	23200	TXV			14.5	12	
	EHD4X36A**	23400	TDR&TXV	16			13	*8MV*0701412**
	EHD4X36A**	23400	TDR&TXV	16			13	*8MV*0901716**
	EHD4X36A**	23400	TDR&TXV	16			13	*8MV*1102120**
	EHD4X36A**	23400	TDR&TXV	16			13	*8MV*1352422**
	EHD4X36A**	23600	TDR&TXV	16			13	*8MX*0451408**
	EHD4X36A**	23600	TDR&TXV	16			13	*9MA*0601714A**
	EHD4X36A**	23400	TDR&TXV	16			13	*9MA*0801714A**
	EHD4X36A**	23800	TDR&TXV	16			13	*9MA*1002120A**
EHD4X36A**	23800	TDR&TXV	16			13.2	*9MA*1202422A**	
EHD4X36A**	23600	TDR&TXV	15.2			12.5	*9MV*0401410A**	
EHD4X36A**	23600	TDR&TXV	16			13	*9MV*0601714A**	
EHD4X36A**	23800	TDR&TXV	16			13.2	*9MV*0801716A**	
EHD4X36A**	23600	TDR&TXV	16			13	*9MV*1002116A**	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA624GKA	EHD4X36A**	24000	TDR&TXV	16.5			13.2	*9MV*1202422A**
	EHD4X36A**	23800	TDR&TXV	15			12	*9MX*0401410A**
	EHD4X36A**	23800	TDR&TXV	16			13	*9MX*0601714A**
	EHD4X36A**	23600	TXV			14.5	12	
	EN(A,D)4X19*17**	23000	TDR&TXV	16			13	*8MV*0701412**
	EN(A,D)4X19*17**	23000	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D)4X19*17**	23200	TDR&TXV	16			13	*8MX*0451408**
	EN(A,D)4X19*17**	23200	TXV			14.2	11.7	
	EN(A,D)4X24*14**	22800	TDR&TXV	15.5			12.5	*8MV*0701412**
	EN(A,D)4X24*14**	23000	TDR&TXV	15.5			12.5	*8MX*0451408**
	EN(A,D)4X24*14**	22800	TDR&TXV	14.5			12	*9MV*0401410A**
	EN(A,D)4X24*14**	23200	TDR&TXV	14.5			12	*9MX*0401410A**
	EN(A,D)4X24*14**	23200	TDR&TXV	16			13	MV08B15**B*
	EN(A,D)4X24*14**	23000	TXV			14	11.5	
	EN(A,D)4X24*17**	22800	TDR&TXV	15.5			12.5	*8MV*0701412**
	EN(A,D)4X24*17**	22800	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D)4X24*17**	23000	TDR&TXV	15.5			12.5	*8MX*0451408**
	EN(A,D)4X24*17**	23000	TDR&TXV	15.5			12.7	*9MA*0601714A**
	EN(A,D)4X24*17**	23000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EN(A,D)4X24*17**	22800	TDR&TXV	14.5			12	*9MV*0401410A**
	EN(A,D)4X24*17**	22800	TDR&TXV	15.5			12.7	*9MV*0601714A**
	EN(A,D)4X24*17**	23000	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EN(A,D)4X24*17**	23200	TDR&TXV	14.5			12	*9MX*0401410A**
	EN(A,D)4X24*17**	23000	TDR&TXV	15.5			12.7	*9MX*0601714A**
	EN(A,D)4X24*17**	23200	TDR&TXV	16			13	MV08B15**B*
	EN(A,D)4X24*17**	23200	TDR&TXV	16			13	MV12F19**B*
	EN(A,D)4X24*17**	23000	TDR&TXV	15.2			12.5	*9MPV050
	EN(A,D)4X24*17**	23200	TDR&TXV	15			12.5	*9MPV075
	EN(A,D)4X24*17**	23000	TDR&TXV	15			12.5	*9MVX040
	EN(A,D)4X24*17**	23000	TDR&TXV	15			12.5	*9MVX060
	EN(A,D)4X24*17**	23200	TDR&TXV	15.5			12.5	OLV098A12A
	EN(A,D)4X24*17**	23200	TDR&TXV	15.5			12.5	OMV098J12A
	EN(A,D)4X24*17**	23000	TDR&TXV	15.5			12.5	OMV112K14A
	EN(A,D)4X24*17**	23000	TXV			14	11.5	
	EN(A,D)4X30*14**	23000	TDR&TXV	16			13	*8MV*0701412**
	EN(A,D)4X30*14**	23200	TDR&TXV	15.5			12.5	*8MX*0451408**
	EN(A,D)4X30*14**	23000	TDR&TXV	15			12	*9MV*0401410A**
	EN(A,D)4X30*14**	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	EN(A,D)4X30*14**	23400	TDR&TXV	16			13.2	MV08B15**B*
	EN(A,D)4X30*14**	23200	TXV			14.2	11.7	
	EN(A,D)4X30*17**	23000	TDR&TXV	16			13	*8MV*0701412**
	EN(A,D)4X30*17**	23000	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D)4X30*17**	23200	TDR&TXV	16			13	*8MX*0451408**
	EN(A,D)4X30*17**	23200	TDR&TXV	15.5			13	*9MA*0601714A**
	EN(A,D)4X30*17**	23000	TDR&TXV	16			13	*9MA*0801714A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor EER blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA624GKA	EN(A,D)4X30*17**	23200	TDR&TXV	15			12	*9MV*0401410A**
	EN(A,D)4X30*17**	23200	TDR&TXV	16			13	*9MV*0601714A**
	EN(A,D)4X30*17**	23400	TDR&TXV	16			13	*9MV*0801716A**
	EN(A,D)4X30*17**	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	EN(A,D)4X30*17**	23400	TDR&TXV	16			13	*9MX*0601714A**
	EN(A,D)4X30*17**	23400	TDR&TXV	16			13.2	MV08B15**B*
	EN(A,D)4X30*17**	23400	TDR&TXV	16			13.2	MV12F19**B*
	EN(A,D)4X30*17**	23400	TDR&TXV	15.5			12.7	*9MPV050
	EN(A,D)4X30*17**	23600	TDR&TXV	15.5			12.7	*9MPV075
	EN(A,D)4X30*17**	23200	TDR&TXV	15.5			12.5	*9MVX040
	EN(A,D)4X30*17**	23600	TDR&TXV	15.5			12.5	*9MVX060
	EN(A,D)4X30*17**	23200	TDR&TXV	16			13	OLV098A12A
	EN(A,D)4X30*17**	23400	TDR&TXV	15.5			13	OMV098J12A
	EN(A,D)4X30*17**	23200	TDR&TXV	16			13	OMV112K14A
	EN(A,D)4X30*17**	23200	TXV			14.2	11.7	
	EN(A,D)4X31*17**	23400	TDR&TXV	16			13	*8MV*0701412**
	EN(A,D)4X31*17**	23400	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D)4X31*17**	23800	TDR&TXV	16			13	*8MX*0451408**
	EN(A,D)4X31*17**	23600	TDR&TXV	16			13	*9MA*0601714A**
	EN(A,D)4X31*17**	23400	TDR&TXV	16			13	*9MA*0801714A**
	EN(A,D)4X31*17**	23600	TDR&TXV	15			12.5	*9MV*0401410A**
	EN(A,D)4X31*17**	23600	TDR&TXV	16			13	*9MV*0601714A**
	EN(A,D)4X31*17**	23800	TDR&TXV	16.5			13.2	*9MV*0801716A**
	EN(A,D)4X31*17**	24000	TDR&TXV	15			12	*9MX*0401410A**
	EN(A,D)4X31*17**	23800	TDR&TXV	16			13.2	*9MX*0601714A**
	EN(A,D)4X31*17**	23800	TDR&TXV	16			13.5	MV08B15**B*
	EN(A,D)4X31*17**	23800	TDR&TXV	16.5			13.5	MV12F19**B*
	EN(A,D)4X31*17**	24000	TDR&TXV	16			13	*9MPV050
	EN(A,D)4X31*17**	24000	TDR&TXV	15.5			13	*9MPV075
	EN(A,D)4X31*17**	24000	TDR&TXV	16			13	*9MVX040
	EN(A,D)4X31*17**	24000	TDR&TXV	16			13	*9MVX060
	EN(A,D)4X31*17**	23600	TDR&TXV	16			13	OLV098A12A
	EN(A,D)4X31*17**	23800	TDR&TXV	16			13	OMV098J12A
	EN(A,D)4X31*17**	23600	TDR&TXV	16			13	OMV112K14A
	EN(A,D)4X36*21**	23000	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D)4X36*21**	23000	TDR&TXV	16			13	*8MV*1102120**
	EN(A,D)4X36*21**	23200	TDR&TXV	15.5			13	*9MA*0601714A**
	EN(A,D)4X36*21**	23000	TDR&TXV	16			13	*9MA*0801714A**
	EN(A,D)4X36*21**	23400	TDR&TXV	16			13	*9MA*1002120A**
	EN(A,D)4X36*21**	23200	TDR&TXV	16			13	*9MV*0601714A**
EN(A,D)4X36*21**	23400	TDR&TXV	16			13	*9MV*0801716A**	
EN(A,D)4X36*21**	23200	TDR&TXV	16			13	*9MV*1002116A**	
EN(A,D)4X36*21**	23400	TDR&TXV	16			13	*9MX*0601714A**	
EN(A,D)4X36*21**	23200	TXV			14.2	11.7		
EN(A,D,W)4X36*17**	23000	TDR&TXV	16			13	*8MV*0701412**	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS					EER	Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER				
Standard	TDR			TXV				
CSA624GKA	EN(A,D,W)4X36*17**	23000	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D,W)4X36*17**	23200	TDR&TXV	16			13	*8MX*0451408**
	EN(A,D,W)4X36*17**	23200	TDR&TXV	15.5			13	*9MA*0601714A**
	EN(A,D,W)4X36*17**	23000	TDR&TXV	16			13	*9MA*0801714A**
	EN(A,D,W)4X36*17**	23200	TDR&TXV	15			12	*9MV*0401410A**
	EN(A,D,W)4X36*17**	23200	TDR&TXV	16			13	*9MV*0601714A**
	EN(A,D,W)4X36*17**	23400	TDR&TXV	16			13	*9MV*0801716A**
	EN(A,D,W)4X36*17**	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	EN(A,D,W)4X36*17**	23400	TDR&TXV	16			13	*9MX*0601714A**
	EN(A,D,W)4X36*17**	23200	TXV			14.2	11.7	
	ENH4X24*17**	22800	TDR&TXV	15.5			12.5	*8MV*0701412**
	ENH4X24*17**	22800	TDR&TXV	16			13	*8MV*0901716**
	ENH4X24*17**	22800	TDR&TXV	15.5			12.5	*8MV*1102120**
	ENH4X24*17**	22800	TDR&TXV	15.5			12.5	*8MV*1352422**
	ENH4X24*17**	23000	TDR&TXV	15.5			12.5	*8MX*0451408**
	ENH4X24*17**	23000	TDR&TXV	15.5			12.5	*9MA*0601714A**
	ENH4X24*17**	23000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	ENH4X24*17**	23200	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ENH4X24*17**	23200	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ENH4X24*17**	22800	TDR&TXV	14.5			12	*9MV*0401410A**
	ENH4X24*17**	22800	TDR&TXV	15.5			12.7	*9MV*0601714A**
	ENH4X24*17**	23000	TDR&TXV	15.5			12.7	*9MV*0801716A**
	ENH4X24*17**	22800	TDR&TXV	15.5			12.7	*9MV*1002116A**
	ENH4X24*17**	23000	TDR&TXV	15.5			13	*9MV*1202422A**
	ENH4X24*17**	23200	TDR&TXV	14.5			12	*9MX*0401410A**
	ENH4X24*17**	23000	TDR&TXV	15.5			12.7	*9MX*0601714A**
	ENH4X24*17**	23200	TDR&TXV	16			13	MV08B15**B*
	ENH4X24*17**	23200	TDR&TXV	16			13	MV12F19**B*
	ENH4X24*17**	23000	TDR&TXV	15.2			12.5	*9MPV050
	ENH4X24*17**	23200	TDR&TXV	15			12.5	*9MPV075
	ENH4X24*17**	23400	TDR&TXV	15.2			12.5	*9MPV100
	ENH4X24*17**	23400	TDR&TXV	15.5			12.7	*9MPV125
	ENH4X24*17**	23000	TDR&TXV	15			12.5	*9MVX040
	ENH4X24*17**	23000	TDR&TXV	15			12.5	*9MVX060
	ENH4X24*17**	23400	TDR&TXV	15			12.5	*9MVX080
	ENH4X24*17**	23200	TDR&TXV	15.5			12.5	*9MVX100
	ENH4X24*17**	23000	TDR&TXV	15.5			12.5	OLV098A12A
	ENH4X24*17**	23200	TDR&TXV	15.5			12.5	OMV098J12A
	ENH4X24*17**	23000	TDR&TXV	15.5			12.5	OMV112K14A
	ENH4X24*17**	23000	TXV			14	11.5	
ENH4X30*17**	23000	TDR&TXV	16			13	*8MV*0701412**	
ENH4X30*17**	23000	TDR&TXV	16			13	*8MV*0901716**	
ENH4X30*17**	23000	TDR&TXV	16			13	*8MV*1102120**	
ENH4X30*17**	23000	TDR&TXV	16			13	*8MV*1352422**	
ENH4X30*17**	23200	TDR&TXV	16			13	*8MX*0451408**	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor EER blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA624GKA	ENH4X30*17**	23200	TDR&TXV	15.5			13	*9MA*0601714A**
	ENH4X30*17**	23000	TDR&TXV	16			13	*9MA*0801714A**
	ENH4X30*17**	23400	TDR&TXV	16			13	*9MA*1002120A**
	ENH4X30*17**	23400	TDR&TXV	16			13	*9MA*1202422A**
	ENH4X30*17**	23200	TDR&TXV	15			12	*9MV*0401410A**
	ENH4X30*17**	23200	TDR&TXV	16			13	*9MV*0601714A**
	ENH4X30*17**	23400	TDR&TXV	16			13	*9MV*0801716A**
	ENH4X30*17**	23200	TDR&TXV	16			13	*9MV*1002116A**
	ENH4X30*17**	23600	TDR&TXV	16			13	*9MV*1202422A**
	ENH4X30*17**	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	ENH4X30*17**	23400	TDR&TXV	16			13	*9MX*0601714A**
	ENH4X30*17**	23400	TDR&TXV	16			13.2	MV08B15**B*
	ENH4X30*17**	23400	TDR&TXV	16			13.2	MV12F19**B*
	ENH4X30*17**	23400	TDR&TXV	15.5			12.7	*9MPV050
	ENH4X30*17**	23600	TDR&TXV	15.5			12.7	*9MPV075
	ENH4X30*17**	23800	TDR&TXV	15.5			12.7	*9MPV100
	ENH4X30*17**	24000	TDR&TXV	16			13	*9MPV125
	ENH4X30*17**	23200	TDR&TXV	15.5			12.5	*9MVX040
	ENH4X30*17**	23600	TDR&TXV	15.5			12.5	*9MVX060
	ENH4X30*17**	23400	TDR&TXV	16			13	*9MVX080
	ENH4X30*17**	23800	TDR&TXV	16			13	*9MVX100
	ENH4X30*17**	23200	TDR&TXV	16			13	OLV098A12A
	ENH4X30*17**	23400	TDR&TXV	15.5			13	OMV098J12A
	ENH4X30*17**	23200	TDR&TXV	16			13	OMV112K14A
	ENH4X30*17**	23200	TXV			14.2	11.7	
	ENH4X31*17**	23400	TDR&TXV	16			13	*8MV*0701412**
	ENH4X31*17**	23400	TDR&TXV	16			13	*8MV*0901716**
	ENH4X31*17**	23400	TDR&TXV	16			13	*8MV*1102120**
	ENH4X31*17**	23400	TDR&TXV	16			13	*8MV*1352422**
	ENH4X31*17**	23800	TDR&TXV	16			13	*8MX*0451408**
	ENH4X31*17**	23600	TDR&TXV	16			13	*9MA*0601714A**
	ENH4X31*17**	23400	TDR&TXV	16			13	*9MA*0801714A**
	ENH4X31*17**	23800	TDR&TXV	16			13.2	*9MA*1002120A**
	ENH4X31*17**	23800	TDR&TXV	16.5			13.2	*9MA*1202422A**
	ENH4X31*17**	23600	TDR&TXV	15			12.5	*9MV*0401410A**
	ENH4X31*17**	23800	TDR&TXV	16			13	*9MV*0601714A**
	ENH4X31*17**	23800	TDR&TXV	16.5			13.2	*9MV*0801716A**
	ENH4X31*17**	23800	TDR&TXV	16.5			13.2	*9MV*1002116A**
	ENH4X31*17**	24000	TDR&TXV	16.5			13.2	*9MV*1202422A**
	ENH4X31*17**	24000	TDR&TXV	15			12	*9MX*0401410A**
	ENH4X31*17**	23800	TDR&TXV	16			13	*9MX*0601714A**
	ENH4X31*17**	23800	TDR&TXV	16.5			13.5	MV08B15**B*
	ENH4X31*17**	23800	TDR&TXV	16.5			13.5	MV12F19**B*

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA624GKA	ENH4X31*17**	24000	TDR&TXV	16			13	*9MPV050
	ENH4X31*17**	24000	TDR&TXV	16			13	*9MPV075
	ENH4X31*17**	24000	TDR&TXV	16			13.2	*9MPV100
	ENH4X31*17**	24000	TDR&TXV	16			13.2	*9MPV125
	ENH4X31*17**	23800	TDR&TXV	16			13	*9MVX040
	ENH4X31*17**	24000	TDR&TXV	16			13	*9MVX060
	ENH4X31*17**	24000	TDR&TXV	16			13	*9MVX080
	ENH4X31*17**	24200	TDR&TXV	16			13	*9MVX100
	ENH4X31*17**	23600	TDR&TXV	16			13	OLV098A12A
	ENH4X31*17**	23800	TDR&TXV	16			13	OMV098J12A
	ENH4X31*17**	23600	TDR&TXV	16			13	OMV112K14A
	ENH4X31*17**	23600	TXV			14.5	12	
	ENH4X36*17**	23000	TDR&TXV	16			13	*8MV*0701412**
	ENH4X36*17**	23000	TDR&TXV	16			13	*8MV*0901716**
	ENH4X36*17**	23000	TDR&TXV	16			13	*8MV*1102120**
	ENH4X36*17**	23000	TDR&TXV	16			13	*8MV*1352422**
	ENH4X36*17**	23200	TDR&TXV	16			13	*8MX*0451408**
	ENH4X36*17**	23200	TDR&TXV	15.5			13	*9MA*0601714A**
	ENH4X36*17**	23000	TDR&TXV	16			13	*9MA*0801714A**
	ENH4X36*17**	23400	TDR&TXV	16			13	*9MA*1002120A**
	ENH4X36*17**	23400	TDR&TXV	16			13	*9MA*1202422A**
	ENH4X36*17**	23200	TDR&TXV	15			12	*9MV*0401410A**
	ENH4X36*17**	23200	TDR&TXV	16			13	*9MV*0601714A**
	ENH4X36*17**	23400	TDR&TXV	16			13	*9MV*0801716A**
	ENH4X36*17**	23200	TDR&TXV	16			13	*9MV*1002116A**
	ENH4X36*17**	23600	TDR&TXV	16			13	*9MV*1202422A**
	ENH4X36*17**	23400	TDR&TXV	14.5			12	*9MX*0401410A**
	ENH4X36*17**	23400	TDR&TXV	16			13	*9MX*0601714A**
	ENH4X36*17**	23200	TXV			14.2	11.7	

* Tested Combo

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA630GKA	*EN(A,D)4X31*17**	28400	TXV			14.5	12	
	FCM4X24****	28000	TDR&TXV	16			13	
	FCM4X36****	28000	TDR&TXV	16			13	
	FCM4X48****	28600	TDR&TXV	16.5			13	
	FEA4X30**A*	28000	TDR&TXV	15			12.5	
	FEA4X36**A*	28200	TDR&TXV	15			12.5	
	FEM4P30**A*	28000	TDR		15		12.5	
	FEM4P36**A*	28000	TDR		15		12.5	
	FEM4P42**A*	28400	TDR		14.5		12	
	FEM4X30****	28000	TDR&TXV	15.2			12.7	
	FEM4X36****	28600	TDR&TXV	15.2			12.5	
	FS(M,U)4P30**A*	28200	TDR		15		12.5	
	FS(M,U)4P36**A*	28000	TDR		14.5		12	
	FSA4X30**A*	27600	TDR&TXV	14			12	
	FSA4X36**A*	28000	TDR&TXV	14			12	
	FVM4X36****	28000	TDR&TXV	16			13.2	
	FXM4X30**A*	28400	TDR&TXV	15.5			13	
	FXM4X36**A*	28800	TDR&TXV	16			13	
	FXM4X42**A*	28600	TDR&TXV	15			12.5	
	EA*4X30*14A*	27600	TDR&TXV	15.5			12.5	*8MV*0701412**
	EA*4X30*14A*	27200	TDR&TXV	14			11.5	*9MV*0401410A**
	EA*4X30*14A*	27400	TDR&TXV	13.5			11.2	*9MX*0401410A**
	EA*4X30*14A*	27800	TDR&TXV	15.5			13	MV08B15**B*
	EA*4X30*14A*	27800	TXV			14	12	
	EA*4X30*17A*	27600	TDR&TXV	15.5			12.5	*8MV*0701412**
	EA*4X30*17A*	27600	TDR&TXV	16			13	*8MV*0901716**
	EA*4X30*17A*	27800	TDR&TXV	15			12.5	*8MX*0701716**
	EA*4X30*17A*	27600	TDR&TXV	15			12.5	*9MA*0601714A**
	EA*4X30*17A*	27800	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EA*4X30*17A*	27400	TDR&TXV	14			11.5	*9MV*0401410A**
	EA*4X30*17A*	27600	TDR&TXV	15.5			12.5	*9MV*0601714A**
	EA*4X30*17A*	27800	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EA*4X30*17A*	27600	TDR&TXV	13.5			11.2	*9MX*0401410A**
	EA*4X30*17A*	27800	TDR&TXV	15.5			12.5	*9MX*0601714A**
	EA*4X30*17A*	28000	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EA*4X30*17A*	27800	TDR&TXV	16			13.2	MV08B15**B*
	EA*4X30*17A*	28000	TDR&TXV	16			13.2	MV12F19**B*
	EA*4X30*17A*	27600	TDR&TXV	14.5			12.2	*9MPV050
	EA*4X30*17A*	27800	TDR&TXV	15			12	*9MPV075
	EA*4X30*17A*	27600	TDR&TXV	15.5			12.5	OLV098A12A
	EA*4X30*17A*	27800	TDR&TXV	15			12.5	OMV098J12A
	EA*4X30*17A*	27800	TDR&TXV	15.5			13	OMV112K14A
	EA*4X30*17A*	27800	TXV			14	12	
	EA*4X36*14A*	27600	TDR&TXV	15.5			12.5	*8MV*0701412**
	EA*4X36*14A*	27400	TDR&TXV	14			11.5	*9MV*0401410A**
	EA*4X36*14A*	27600	TDR&TXV	13.5			11.2	*9MX*0401410A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA630GKA	EA*4X36*14A*	28000	TDR&TXV	16			13	MV08B15**B*
	EA*4X36*14A*	27800	TXV			14	12	
	EA*4X36*17A*	27800	TDR&TXV	15.5			12.5	*8MV*0701412**
	EA*4X36*17A*	27800	TDR&TXV	16			13	*8MV*0901716**
	EA*4X36*17A*	28000	TDR&TXV	15.5			12.5	*8MX*0701716**
	EA*4X36*17A*	27600	TDR&TXV	15.5			12.5	*9MA*0601714A**
	EA*4X36*17A*	27800	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EA*4X36*17A*	27400	TDR&TXV	14			11.7	*9MV*0401410A**
	EA*4X36*17A*	27800	TDR&TXV	15			12.7	*9MV*0601714A**
	EA*4X36*17A*	27800	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EA*4X36*17A*	27600	TDR&TXV	13.5			11.2	*9MX*0401410A**
	EA*4X36*17A*	28000	TDR&TXV	15			12.5	*9MX*0601714A**
	EA*4X36*17A*	28200	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EA*4X36*17A*	28000	TDR&TXV	16			13.2	MV08B15**B*
	EA*4X36*17A*	28000	TDR&TXV	16			13.2	MV12F19**B*
	EA*4X36*17A*	27800	TDR&TXV	15			12.5	*9MPV050
	EA*4X36*17A*	27800	TDR&TXV	15			12.5	*9MPV075
	EA*4X36*17A*	27800	TDR&TXV	15.5			12.5	OLV098A12A
	EA*4X36*17A*	27800	TDR&TXV	15			12.5	OMV098J12A
	EA*4X36*17A*	28000	TDR&TXV	15.5			13	OMV112K14A
	EA*4X36*17A*	27800	TXV			14	12	
	EA*4X36*21A*	27800	TDR&TXV	16			13	*8MV*0901716**
	EA*4X36*21A*	27800	TDR&TXV	16			13	*8MV*1102120**
	EA*4X36*21A*	28000	TDR&TXV	15.5			13	*8MX*0701716**
	EA*4X36*21A*	28200	TDR&TXV	16			13	*8MX*0902116**
	EA*4X36*21A*	27800	TDR&TXV	15.5			12.5	*9MA*0601714A**
	EA*4X36*21A*	27800	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EA*4X36*21A*	28000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EA*4X36*21A*	27800	TDR&TXV	15.5			12.7	*9MV*0601714A**
	EA*4X36*21A*	28000	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EA*4X36*21A*	28000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EA*4X36*21A*	28000	TDR&TXV	15.5			12.7	*9MX*0601714A**
	EA*4X36*21A*	28200	TDR&TXV	15.5			12.7	*9MX*0801716A**
	EA*4X36*21A*	28000	TDR&TXV	16			13.5	MV12F19**B*
	EA*4X36*21A*	27800	TDR&TXV	15			12.5	*9MPV050
	EA*4X36*21A*	28000	TDR&TXV	15			12.5	*9MPV075
	EA*4X36*21A*	28200	TDR&TXV	15.5			13	*9MPV100
	EA*4X36*21A*	28000	TDR&TXV	15.5			13	OLV112A16A
	EA*4X36*21A*	27800	TXV			14	12	
	EA*4X42*21A*	28000	TDR&TXV	16			13	*8MV*0901716**
	EA*4X42*21A*	28000	TDR&TXV	16			13	*8MV*1102120**
	EA*4X42*21A*	28200	TDR&TXV	15.5			12.5	*8MX*0701716**
	EA*4X42*21A*	28200	TDR&TXV	16			13	*8MX*0902116**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE									
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .									
New ratings may be listed online before Specification Sheets are updated.									
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model	
		COOLING 95° F (35° C)							
		Capacity	Factory Enhance	SEER			EER		
Standard	TDR			TXV					
CSA630GKA	EA*4X42*21A*	27800	TDR&TXV	15.5			12.7	*9MA*0601714A**	
	EA*4X42*21A*	28000	TDR&TXV	15.5			12.7	*9MA*0801714A**	
	EA*4X42*21A*	28200	TDR&TXV	15.5			13	*9MA*1002120A**	
	EA*4X42*21A*	28000	TDR&TXV	15.5			12.7	*9MV*0601714A**	
	EA*4X42*21A*	28200	TDR&TXV	15.5			13	*9MV*0801716A**	
	EA*4X42*21A*	28000	TDR&TXV	15.5			13	*9MV*1002116A**	
	EA*4X42*21A*	28200	TDR&TXV	15.5			12.7	*9MX*0601714A**	
	EA*4X42*21A*	28400	TDR&TXV	15.5			12.7	*9MX*0801716A**	
	EA*4X42*21A*	28000	TXV				14	11.5	
	EA*4X42*24A*	28000	TDR&TXV		16			13	*8MV*1102120**
	EA*4X42*24A*	28000	TDR&TXV		16			13	*8MV*1352422**
	EA*4X42*24A*	28400	TDR&TXV		16			13	*8MX*0902116**
	EA*4X42*24A*	28200	TDR&TXV		15.5			13	*9MA*1002120A**
	EA*4X42*24A*	28200	TDR&TXV		16			13	*9MA*1202422A**
	EA*4X42*24A*	28200	TDR&TXV		15.5			13	*9MV*1002116A**
	EA*4X42*24A*	28200	TDR&TXV		16			13	*9MV*1202422A**
	EA*4X42*24A*	28000	TXV				14	11.5	
	ED*4X30B**	27600	TDR&TXV		15.2			12.7	*8MV*0701412**
	ED*4X30B**	27800	TDR&TXV		15.5			13	MV08B15**B*
	ED*4X30B**	27800	TXV				14	11.7	
	ED*4X30F**	27600	TDR&TXV		15.5			13	*8MV*0901716**
	ED*4X30F**	27800	TDR&TXV		15.5			13	*8MV*1102120**
	ED*4X30F**	27800	TDR&TXV		15.2			12.7	*8MX*0701716**
	ED*4X30F**	28000	TDR&TXV		15.5			12.7	*8MX*0902116**
	ED*4X30F**	27600	TDR&TXV		15.2			12.5	*9MA*0601714A**
	ED*4X30F**	27800	TDR&TXV		15.2			12.7	*9MA*0801714A**
	ED*4X30F**	27800	TDR&TXV		15.2			12.7	*9MA*1002120A**
	ED*4X30F**	27600	TDR&TXV		15.2			12.7	*9MV*0601714A**
	ED*4X30F**	27800	TDR&TXV		15.2			12.7	*9MV*0801716A**
	ED*4X30F**	27800	TDR&TXV		15.5			12.7	*9MV*1002116A**
	ED*4X30F**	27800	TDR&TXV		15.2			12.5	*9MX*0601714A**
	ED*4X30F**	28000	TDR&TXV		15.2			12.7	*9MX*0801716A**
	ED*4X30F**	27800	TDR&TXV		16			13.2	MV08B15**B*
	ED*4X30F**	28000	TDR&TXV		16			13.2	MV12F19**B*
	ED*4X30F**	27600	TDR&TXV		14.5			12.2	*9MPV050
	ED*4X30F**	27800	TDR&TXV		15			12.5	*9MPV075
	ED*4X30F**	27800	TDR&TXV		14.5			12.2	*9MVX040
	ED*4X30F**	27800	TDR&TXV		15			12.5	*9MVX060
	ED*4X30F**	27600	TDR&TXV		15.2			12.7	OLV098A12A
	ED*4X30F**	28000	TDR&TXV		15.2			12.7	OLV112A16A
	ED*4X30F**	27800	TDR&TXV		15			12.5	OMV098J12A
	ED*4X30F**	27800	TDR&TXV		15.5			13	OMV112K14A
ED*4X30F**	27800	TXV				14	11.7		
ED*4X36B**	27600	TDR&TXV		15.2			12.7	*8MV*0701412**	
ED*4X36B**	28000	TDR&TXV		16			13	MV08B15**B*	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA630GKA	ED*4X36B**	27800	TXV			14	11.7	
	ED*4X36F**	27800	TDR&TXV	15.5			13	*8MV*0901716**
	ED*4X36F**	27800	TDR&TXV	15.5			13	*8MV*1102120**
	ED*4X36F**	28000	TDR&TXV	15.2			12.7	*8MX*0701716**
	ED*4X36F**	28000	TDR&TXV	15.5			13	*8MX*0902116**
	ED*4X36F**	27600	TDR&TXV	15			12.7	*9MA*0601714A**
	ED*4X36F**	27800	TDR&TXV	15.5			12.7	*9MA*0801714A**
	ED*4X36F**	28000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ED*4X36F**	27800	TDR&TXV	15.5			12.7	*9MV*0601714A**
	ED*4X36F**	27800	TDR&TXV	15.5			12.7	*9MV*0801716A**
	ED*4X36F**	27800	TDR&TXV	15.5			12.7	*9MV*1002116A**
	ED*4X36F**	28000	TDR&TXV	15.5			12.7	*9MX*0601714A**
	ED*4X36F**	28200	TDR&TXV	15.5			12.7	*9MX*0801716A**
	ED*4X36F**	28000	TDR&TXV	16			13.2	MV08B15**B*
	ED*4X36F**	28000	TDR&TXV	16			13.2	MV12F19**B*
	ED*4X36F**	27800	TDR&TXV	15			12.5	*9MPV050
	ED*4X36F**	27800	TDR&TXV	15			12.5	*9MPV075
	ED*4X36F**	27800	TDR&TXV	15			12.5	*9MVX040
	ED*4X36F**	28000	TDR&TXV	15.2			12.5	*9MVX060
	ED*4X36F**	27800	TDR&TXV	15.2			12.7	OLV098A12A
	ED*4X36F**	28000	TDR&TXV	15.5			12.7	OLV112A16A
	ED*4X36F**	27800	TDR&TXV	15.2			12.5	OMV098J12A
	ED*4X36F**	28000	TDR&TXV	15.5			13	OMV112K14A
	ED*4X36F**	27800	TXV			14	11.7	
	ED*4X36J**	27800	TDR&TXV	15.5			13	*8MV*1102120**
	ED*4X36J**	27800	TDR&TXV	16			13.2	*8MV*1352422**
	ED*4X36J**	28200	TDR&TXV	15.5			13	*8MX*0902116**
	ED*4X36J**	28000	TDR&TXV	15.5			13	*9MA*1002120A**
	ED*4X36J**	28000	TDR&TXV	15.5			13	*9MA*1202422A**
	ED*4X36J**	28000	TDR&TXV	15.5			13	*9MV*1002116A**
	ED*4X36J**	28000	TDR&TXV	15.5			13	*9MV*1202422A**
	ED*4X36J**	28000	TDR&TXV	16			13.5	MV12F19**B*
	ED*4X36J**	27800	TDR&TXV	15			12.5	*9MPV050
	ED*4X36J**	28000	TDR&TXV	15			12.5	*9MPV075
	ED*4X36J**	28200	TDR&TXV	15.5			13	*9MPV100
	ED*4X36J**	28200	TDR&TXV	15.5			13	*9MPV125
	ED*4X36J**	27800	TDR&TXV	15			12.5	*9MVX040
	ED*4X36J**	28200	TDR&TXV	15.2			12.5	*9MVX060
	ED*4X36J**	28400	TDR&TXV	15.5			13	*9MVX080
	ED*4X36J**	28200	TDR&TXV	15.5			13	*9MVX100
	ED*4X36J**	28000	TDR&TXV	15.5			12.7	OLV112A16A
	ED*4X36J**	27800	TXV			14	11.7	
	EHD4X30A**	27800	TDR&TXV	15.5			12.5	*8MV*0701412**
	EHD4X30A**	27800	TDR&TXV	15.5			13	*8MV*0901716**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA630GKA	EHD4X30A**	27800	TDR&TXV	15.5			13	*8MV*1102120**
	EHD4X30A**	27800	TDR&TXV	15.5			13	*8MV*1352422**
	EHD4X30A**	27800	TDR&TXV	15			12.5	*8MX*0701716**
	EHD4X30A**	27800	TDR&TXV	15.5			12.5	*8MX*0902116**
	EHD4X30A**	27800	TDR&TXV	15			12.5	*9MA*0601714A**
	EHD4X30A**	28000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EHD4X30A**	28000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EHD4X30A**	28000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EHD4X30A**	27400	TDR&TXV	14			11.7	*9MV*0401410A**
	EHD4X30A**	27800	TDR&TXV	15			12.7	*9MV*0601714A**
	EHD4X30A**	27800	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EHD4X30A**	27800	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EHD4X30A**	27800	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EHD4X30A**	27600	TDR&TXV	13.5			11.2	*9MX*0401410A**
	EHD4X30A**	28000	TDR&TXV	15			12.7	*9MX*0601714A**
	EHD4X30A**	28200	TDR&TXV	15			12.7	*9MX*0801716A**
	EHD4X30A**	28000	TDR&TXV	16			13	MV08B15**B*
	EHD4X30A**	28200	TDR&TXV	16			13.2	MV12F19**B*
	EHD4X30A**	27800	TDR&TXV	14.5			12.2	*9MPV050
	EHD4X30A**	27800	TDR&TXV	15			12.5	*9MPV075
	EHD4X30A**	28000	TDR&TXV	15.2			12.7	*9MPV100
	EHD4X30A**	28000	TDR&TXV	15.5			12.7	*9MPV125
	EHD4X30A**	27800	TDR&TXV	15			12.5	*9MVX040
	EHD4X30A**	27800	TDR&TXV	15			12.5	*9MVX060
	EHD4X30A**	28200	TDR&TXV	15.5			12.5	*9MVX080
	EHD4X30A**	28000	TDR&TXV	15.5			12.5	*9MVX100
	EHD4X30A**	27800	TDR&TXV	15			12.5	OLV098A12A
	EHD4X30A**	28000	TDR&TXV	15			12.5	OLV112A16A
	EHD4X30A**	27800	TDR&TXV	15			12.5	OMV098J12A
	EHD4X30A**	28000	TDR&TXV	15.5			12.5	OMV112K14A
	EHD4X30A**	28000	TXV			14	12	
	EHD4X36A**	28200	TDR&TXV	16			13	*8MV*0701412**
	EHD4X36A**	28200	TDR&TXV	16			13	*8MV*0901716**
	EHD4X36A**	28400	TDR&TXV	16			13	*8MV*1102120**
	EHD4X36A**	28200	TDR&TXV	16			13	*8MV*1352422**
	EHD4X36A**	28400	TDR&TXV	15.5			13	*8MX*0701716**
	EHD4X36A**	28600	TDR&TXV	16			13	*8MX*0902116**
	EHD4X36A**	28200	TDR&TXV	15.5			12.7	*9MA*0601714A**
	EHD4X36A**	28400	TDR&TXV	15.5			13	*9MA*0801714A**
	EHD4X36A**	28400	TDR&TXV	16			13	*9MA*1002120A**
	EHD4X36A**	28400	TDR&TXV	16			13	*9MA*1202422A**
	EHD4X36A**	28000	TDR&TXV	14.5			12	*9MV*0401410A**
	EHD4X36A**	28200	TDR&TXV	15.5			12.7	*9MV*0601714A**
	EHD4X36A**	28400	TDR&TXV	16			13	*9MV*0801716A**
	EHD4X36A**	28400	TDR&TXV	16			13	*9MV*1002116A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA630GKA	EHD4X36A**	28400	TDR&TXV	16			13	*9MV*1202422A**
	EHD4X36A**	28200	TDR&TXV	13.7			11.5	*9MX*0401410A**
	EHD4X36A**	28400	TDR&TXV	15.5			12.7	*9MX*0601714A**
	EHD4X36A**	28600	TDR&TXV	15.5			12.7	*9MX*0801716A**
	EHD4X36A**	28400	TDR&TXV	16			13.2	MV08B15**B*
	EHD4X36A**	28600	TDR&TXV	16.5			13.5	MV12F19**B*
	EHD4X36A**	28400	TDR&TXV	15.2			12.7	*9MPV050
	EHD4X36A**	28400	TDR&TXV	15.2			12.7	*9MPV075
	EHD4X36A**	28600	TDR&TXV	15.5			13	*9MPV100
	EHD4X36A**	28600	TDR&TXV	16			13.2	*9MPV125
	EHD4X36A**	28400	TDR&TXV	15			12.5	*9MVX040
	EHD4X36A**	28600	TDR&TXV	15.5			12.5	*9MVX060
	EHD4X36A**	28800	TDR&TXV	16			13	*9MVX080
	EHD4X36A**	28600	TDR&TXV	16			13	*9MVX100
	EHD4X36A**	28200	TDR&TXV	15.5			13	OLV098A12A
	EHD4X36A**	28600	TDR&TXV	15.5			13	OLV112A16A
	EHD4X36A**	28400	TDR&TXV	15.5			13	OMV098J12A
	EHD4X36A**	28400	TDR&TXV	16			13	OMV112K14A
	EHD4X36A**	28400	TXV			14.5	12	
	EHD4X42A**	28400	TDR&TXV	16			13	*8MV*0701412**
	EHD4X42A**	28400	TDR&TXV	16			13	*8MV*0901716**
	EHD4X42A**	28400	TDR&TXV	16			13	*8MV*1102120**
	EHD4X42A**	28400	TDR&TXV	16			13	*8MV*1352422**
	EHD4X42A**	28600	TDR&TXV	16			13	*8MX*0701716**
	EHD4X42A**	28800	TDR&TXV	16			13	*8MX*0902116**
	EHD4X42A**	28400	TDR&TXV	15.5			12.7	*9MA*0601714A**
	EHD4X42A**	28400	TDR&TXV	16			13	*9MA*0801714A**
	EHD4X42A**	28600	TDR&TXV	16			13	*9MA*1002120A**
	EHD4X42A**	28600	TDR&TXV	16			13	*9MA*1202422A**
	EHD4X42A**	28000	TDR&TXV	14.5			12	*9MV*0401410A**
	EHD4X42A**	28400	TDR&TXV	16			13	*9MV*0601714A**
	EHD4X42A**	28600	TDR&TXV	16			13	*9MV*0801716A**
	EHD4X42A**	28600	TDR&TXV	16			13	*9MV*1002116A**
	EHD4X42A**	28600	TDR&TXV	16			13.2	*9MV*1202422A**
	EHD4X42A**	28400	TDR&TXV	14			11.5	*9MX*0401410A**
	EHD4X42A**	28600	TDR&TXV	16			13	*9MX*0601714A**
	EHD4X42A**	28800	TDR&TXV	16			13	*9MX*0801716A**
	EHD4X42A**	28600	TXV			14.5	12	
	EN(A,D)4X30*14**	27600	TDR&TXV	15			12.5	*8MV*0701412**
	EN(A,D)4X30*14**	27200	TDR&TXV	14			11.5	*9MV*0401410A**
	EN(A,D)4X30*14**	27400	TDR&TXV	13.5			11.2	*9MX*0401410A**
	EN(A,D)4X30*14**	27800	TDR&TXV	15.5			13	MV08B15**B*
	EN(A,D)4X30*14**	27800	TXV			14	12	
	EN(A,D)4X30*17**	27600	TDR&TXV	15.5			12.5	*8MV*0701412**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA630GKA	EN(A,D)4X30*17**	27800	TDR&TXV	15.5			13	*8MV*0901716**
	EN(A,D)4X30*17**	27800	TDR&TXV	15			12.5	*8MX*0701716**
	EN(A,D)4X30*17**	27600	TDR&TXV	15			12.5	*9MA*0601714A**
	EN(A,D)4X30*17**	27800	TDR&TXV	15.2			12.7	*9MA*0801714A**
	EN(A,D)4X30*17**	27400	TDR&TXV	14			11.5	*9MV*0401410A**
	EN(A,D)4X30*17**	27600	TDR&TXV	15			12.5	*9MV*0601714A**
	EN(A,D)4X30*17**	27800	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EN(A,D)4X30*17**	27600	TDR&TXV	13.5			11.2	*9MX*0401410A**
	EN(A,D)4X30*17**	27800	TDR&TXV	15			12.5	*9MX*0601714A**
	EN(A,D)4X30*17**	28000	TDR&TXV	15			12.5	*9MX*0801716A**
	EN(A,D)4X30*17**	28000	TDR&TXV	16			13	MV08B15**B*
	EN(A,D)4X30*17**	28000	TDR&TXV	16			13.2	MV12F19**B*
	EN(A,D)4X30*17**	27600	TDR&TXV	14.5			12.2	*9MPV050
	EN(A,D)4X30*17**	27800	TDR&TXV	15			12.2	*9MPV075
	EN(A,D)4X30*17**	27800	TDR&TXV	15			12.5	*9MVX040
	EN(A,D)4X30*17**	27800	TDR&TXV	15			12.5	*9MVX060
	EN(A,D)4X30*17**	27800	TDR&TXV	15			12.5	OLV098A12A
	EN(A,D)4X30*17**	27800	TDR&TXV	15			12.5	OMV098J12A
	EN(A,D)4X30*17**	27800	TDR&TXV	15.5			12.5	OMV112K14A
	EN(A,D)4X30*17**	27800	TXV			14	12	
	EN(A,D)4X31*17**	28200	TDR&TXV	16			13	*8MV*0701412**
	EN(A,D)4X31*17**	28200	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D)4X31*17**	28400	TDR&TXV	15.5			13	*8MX*0701716**
	EN(A,D)4X31*17**	28200	TDR&TXV	15.5			12.7	*9MA*0601714A**
	EN(A,D)4X31*17**	28400	TDR&TXV	15.5			13	*9MA*0801714A**
	EN(A,D)4X31*17**	28000	TDR&TXV	14.5			12	*9MV*0401410A**
	EN(A,D)4X31*17**	28200	TDR&TXV	15.5			12.7	*9MV*0601714A**
	EN(A,D)4X31*17**	28400	TDR&TXV	16			13	*9MV*0801716A**
	EN(A,D)4X31*17**	28200	TDR&TXV	13.5			11.5	*9MX*0401410A**
	EN(A,D)4X31*17**	28400	TDR&TXV	15.5			12.7	*9MX*0601714A**
	EN(A,D)4X31*17**	28600	TDR&TXV	15.5			12.7	*9MX*0801716A**
	EN(A,D)4X31*17**	28600	TDR&TXV	16			13.5	MV08B15**B*
	EN(A,D)4X31*17**	28600	TDR&TXV	16.5			13.5	MV12F19**B*
	EN(A,D)4X31*17**	28400	TDR&TXV	15.2			12.7	*9MPV050
	EN(A,D)4X31*17**	28400	TDR&TXV	15.2			12.7	*9MPV075
	EN(A,D)4X31*17**	28400	TDR&TXV	15			12.5	*9MVX040
	EN(A,D)4X31*17**	28600	TDR&TXV	15.5			12.5	*9MVX060
	EN(A,D)4X31*17**	28400	TDR&TXV	15.5			13	OLV098A12A
	EN(A,D)4X31*17**	28400	TDR&TXV	15.5			13	OMV098J12A
	EN(A,D)4X31*17**	28400	TDR&TXV	16			13	OMV112K14A
	EN(A,D)4X36*21**	27800	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D)4X36*21**	27800	TDR&TXV	15.5			13	*8MV*1102120**
	EN(A,D)4X36*21**	27800	TDR&TXV	15			12.5	*8MX*0701716**
	EN(A,D)4X36*21**	27800	TDR&TXV	15.5			13	*8MX*0902116**
	EN(A,D)4X36*21**	27600	TDR&TXV	15.2			12.5	*9MA*0601714A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA630GKA	EN(A,D)4X36*21**	27800	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EN(A,D)4X36*21**	28000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EN(A,D)4X36*21**	27600	TDR&TXV	15			12.7	*9MV*0601714A**
	EN(A,D)4X36*21**	27800	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EN(A,D)4X36*21**	27800	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EN(A,D)4X36*21**	27800	TDR&TXV	15			12.7	*9MX*0601714A**
	EN(A,D)4X36*21**	28000	TDR&TXV	15.5			12.7	*9MX*0801716A**
	EN(A,D)4X36*21**	28000	TDR&TXV	16			13.2	MV12F19**B*
	EN(A,D)4X36*21**	27800	TDR&TXV	14.5			12.2	*9MPV050
	EN(A,D)4X36*21**	27800	TDR&TXV	15			12.2	*9MPV075
	EN(A,D)4X36*21**	28000	TDR&TXV	15.2			12.7	*9MPV100
	EN(A,D)4X36*21**	27800	TDR&TXV	15			12.5	*9MVX040
	EN(A,D)4X36*21**	27800	TDR&TXV	15			12.5	*9MVX060
	EN(A,D)4X36*21**	28200	TDR&TXV	15.5			12.5	*9MVX080
	EN(A,D)4X36*21**	28000	TDR&TXV	15.5			12.5	OLV112A16A
	EN(A,D)4X36*21**	27800	TXV			14	12	
	EN(A,D)4X37*17**	28600	TDR&TXV	16.5			13	*8MV*0901716**
	EN(A,D)4X37*17**	28800	TDR&TXV	16			13	*8MX*0701716**
	EN(A,D)4X37*17**	28600	TDR&TXV	16			13	*9MA*0601714A**
	EN(A,D)4X37*17**	28600	TDR&TXV	16			13	*9MA*0801714A**
	EN(A,D)4X37*17**	28200	TDR&TXV	14.5			12	*9MV*0401410A**
	EN(A,D)4X37*17**	28600	TDR&TXV	16			13	*9MV*0601714A**
	EN(A,D)4X37*17**	28800	TDR&TXV	16			13	*9MV*0801716A**
	EN(A,D)4X37*17**	28600	TDR&TXV	14			11.5	*9MX*0401410A**
	EN(A,D)4X37*17**	28800	TDR&TXV	16			13	*9MX*0601714A**
	EN(A,D)4X37*17**	29000	TDR&TXV	16			13	*9MX*0801716A**
	EN(A,D)4X37*17**	28800	TDR&TXV	16.5			13.5	MV08B15**B*
	EN(A,D)4X37*17**	28800	TDR&TXV	16.5			13.7	MV12F19**B*
	EN(A,D)4X37*17**	28600	TDR&TXV	15.5			12.7	*9MPV050
	EN(A,D)4X37*17**	28800	TDR&TXV	15.5			13	*9MPV075
	EN(A,D)4X37*17**	28600	TDR&TXV	15.5			13	*9MVX040
	EN(A,D)4X37*17**	29000	TDR&TXV	15.5			13	*9MVX060
	EN(A,D)4X37*17**	28600	TDR&TXV	16			13	OLV098A12A
	EN(A,D)4X37*17**	28600	TDR&TXV	15.5			13	OMV098J12A
	EN(A,D)4X37*17**	28800	TDR&TXV	16			13	OMV112K14A
	EN(A,D)4X37*17**	28800	TXV			14.5	12	
	EN(A,D,W)4X36*17**	27600	TDR&TXV	15.5			12.5	*8MV*0701412**
	EN(A,D,W)4X36*17**	27800	TDR&TXV	15.5			13	*8MV*0901716**
	EN(A,D,W)4X36*17**	27800	TDR&TXV	15			12.5	*8MX*0701716**
	EN(A,D,W)4X36*17**	27600	TDR&TXV	15			12.5	*9MA*0601714A**
EN(A,D,W)4X36*17**	27800	TDR&TXV	15.5			12.7	*9MA*0801714A**	
EN(A,D,W)4X36*17**	27400	TDR&TXV	14			11.5	*9MV*0401410A**	
EN(A,D,W)4X36*17**	27600	TDR&TXV	15			12.7	*9MV*0601714A**	
EN(A,D,W)4X36*17**	27800	TDR&TXV	15.5			12.7	*9MV*0801716A**	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA630GKA	EN(A,D,W)4X36*17**	27600	TDR&TXV	13.5			11.2	*9MX*0401410A**
	EN(A,D,W)4X36*17**	27800	TDR&TXV	15			12.7	*9MX*0601714A**
	EN(A,D,W)4X36*17**	28000	TDR&TXV	15			12.7	*9MX*0801716A**
	EN(A,D,W)4X36*17**	28000	TDR&TXV	16			13	MV08B15**B*
	EN(A,D,W)4X36*17**	28000	TDR&TXV	16			13.2	MV12F19**B*
	EN(A,D,W)4X36*17**	27600	TDR&TXV	14.5			12.2	*9MPV050
	EN(A,D,W)4X36*17**	27800	TDR&TXV	15			12.2	*9MPV075
	EN(A,D,W)4X36*17**	27800	TDR&TXV	15			12.5	*9MVX040
	EN(A,D,W)4X36*17**	27800	TDR&TXV	15			12.5	*9MVX060
	EN(A,D,W)4X36*17**	27800	TDR&TXV	15			12.5	OLV098A12A
	EN(A,D,W)4X36*17**	27800	TDR&TXV	15			12.5	OMV098J12A
	EN(A,D,W)4X36*17**	27800	TDR&TXV	15.5			12.5	OMV112K14A
	EN(A,D,W)4X36*17**	27800	TXV			14	12	
	EN(A,D,W)4X42*21**	28000	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D,W)4X42*21**	28000	TDR&TXV	16			13	*8MV*1102120**
	EN(A,D,W)4X42*21**	28200	TDR&TXV	15.5			12.5	*8MX*0701716**
	EN(A,D,W)4X42*21**	28200	TDR&TXV	16			13	*8MX*0902116**
	EN(A,D,W)4X42*21**	27800	TDR&TXV	15.5			12.7	*9MA*0601714A**
	EN(A,D,W)4X42*21**	28000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EN(A,D,W)4X42*21**	28200	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EN(A,D,W)4X42*21**	28000	TDR&TXV	15.5			12.7	*9MV*0601714A**
	EN(A,D,W)4X42*21**	28000	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EN(A,D,W)4X42*21**	28000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EN(A,D,W)4X42*21**	28200	TDR&TXV	15.5			12.7	*9MX*0601714A**
	EN(A,D,W)4X42*21**	28400	TDR&TXV	15.5			12.7	*9MX*0801716A**
	EN(A,D,W)4X42*21**	28200	TXV			14.2	12	
	END4X42*17**	28000	TDR&TXV	16			13	*8MV*0701412**
	END4X42*17**	28200	TDR&TXV	16			13	*8MV*0901716**
	END4X42*17**	28400	TDR&TXV	15.5			13	*8MX*0701716**
	END4X42*17**	28000	TDR&TXV	15.5			12.7	*9MA*0601714A**
	END4X42*17**	28200	TDR&TXV	16			13	*9MA*0801714A**
	END4X42*17**	27800	TDR&TXV	14.5			12	*9MV*0401410A**
	END4X42*17**	28200	TDR&TXV	15.5			12.7	*9MV*0601714A**
	END4X42*17**	28200	TDR&TXV	16			13	*9MV*0801716A**
	END4X42*17**	28000	TDR&TXV	13.7			11.4	*9MX*0401410A**
	END4X42*17**	28400	TDR&TXV	15.5			12.7	*9MX*0601714A**
	END4X42*17**	28600	TDR&TXV	15.5			12.7	*9MX*0801716A**
	END4X42*17**	28400	TXV			14.5	12	
	ENH4X30*17**	27600	TDR&TXV	15.5			12.5	*8MV*0701412**
	ENH4X30*17**	27800	TDR&TXV	15.5			13	*8MV*0901716**
	ENH4X30*17**	27800	TDR&TXV	15.5			13	*8MV*1102120**
	ENH4X30*17**	27800	TDR&TXV	16			13	*8MV*1352422**
	ENH4X30*17**	27800	TDR&TXV	15			12.5	*8MX*0701716**
	ENH4X30*17**	27800	TDR&TXV	15.5			12.5	*8MX*0902116**
	ENH4X30*17**	27600	TDR&TXV	15.2			12.5	*9MA*0601714A**
	ENH4X30*17**	27800	TDR&TXV	15.5			12.7	*9MA*0801714A**
	ENH4X30*17**	28000	TDR&TXV	15.5			12.7	*9MA*1002120A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA630GKA	ENH4X30*17**	27800	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ENH4X30*17**	27400	TDR&TXV	14			11.5	*9MV*0401410A**
	ENH4X30*17**	27600	TDR&TXV	15.5			12.7	*9MV*0601714A**
	ENH4X30*17**	27800	TDR&TXV	15.5			12.7	*9MV*0801716A**
	ENH4X30*17**	27800	TDR&TXV	15.5			12.7	*9MV*1002116A**
	ENH4X30*17**	27800	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ENH4X30*17**	27600	TDR&TXV	13.5			11.2	*9MX*0401410A**
	ENH4X30*17**	27800	TDR&TXV	15			12.7	*9MX*0601714A**
	ENH4X30*17**	28000	TDR&TXV	15			12.7	*9MX*0801716A**
	ENH4X30*17**	28000	TDR&TXV	16			13	MV08B15**B*
	ENH4X30*17**	28000	TDR&TXV	16			13.2	MV12F19**B*
	ENH4X30*17**	27600	TDR&TXV	14.5			12.2	*9MPV050
	ENH4X30*17**	27800	TDR&TXV	15			12.5	*9MPV075
	ENH4X30*17**	28000	TDR&TXV	15.2			12.7	*9MPV100
	ENH4X30*17**	28000	TDR&TXV	15.5			13	*9MPV125
	ENH4X30*17**	27800	TDR&TXV	15			12	*9MVX040
	ENH4X30*17**	27800	TDR&TXV	15			12.5	*9MVX060
	ENH4X30*17**	28200	TDR&TXV	15.5			12.5	*9MVX080
	ENH4X30*17**	28000	TDR&TXV	15.5			13	*9MVX100
	ENH4X30*17**	27800	TDR&TXV	15			12.5	OLV098A12A
	ENH4X30*17**	28000	TDR&TXV	15.5			12.5	OLV112A16A
	ENH4X30*17**	27800	TDR&TXV	15			12.5	OMV098J12A
	ENH4X30*17**	27800	TDR&TXV	15.5			12.5	OMV112K14A
	ENH4X30*17**	27800	TXV			14	12	
	ENH4X31*17**	28200	TDR&TXV	16			13	*8MV*0701412**
	ENH4X31*17**	28200	TDR&TXV	16			13	*8MV*0901716**
	ENH4X31*17**	28400	TDR&TXV	16			13	*8MV*1102120**
	ENH4X31*17**	28400	TDR&TXV	16			13	*8MV*1352422**
	ENH4X31*17**	28400	TDR&TXV	15.5			13	*8MX*0701716**
	ENH4X31*17**	28600	TDR&TXV	16			13	*8MX*0902116**
	ENH4X31*17**	28200	TDR&TXV	15.5			12.7	*9MA*0601714A**
	ENH4X31*17**	28400	TDR&TXV	16			13	*9MA*0801714A**
	ENH4X31*17**	28600	TDR&TXV	16			13	*9MA*1002120A**
	ENH4X31*17**	28400	TDR&TXV	16			13	*9MA*1202422A**
	ENH4X31*17**	28000	TDR&TXV	14.5			12	*9MV*0401410A**
	ENH4X31*17**	28200	TDR&TXV	15.5			12.7	*9MV*0601714A**
	ENH4X31*17**	28400	TDR&TXV	16			13	*9MV*0801716A**
	ENH4X31*17**	28400	TDR&TXV	16			13	*9MV*1002116A**
	ENH4X31*17**	28600	TDR&TXV	16			13	*9MV*1202422A**
	ENH4X31*17**	28200	TDR&TXV	14			11.5	*9MX*0401410A**
	ENH4X31*17**	28400	TDR&TXV	15.5			12.7	*9MX*0601714A**
	ENH4X31*17**	28800	TDR&TXV	15.5			13	*9MX*0801716A**
	ENH4X31*17**	28600	TDR&TXV	16			13.5	MV08B15**B*
	ENH4X31*17**	28600	TDR&TXV	16.5			13.7	MV12F19**B*

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA630GKA	ENH4X31*17**	28400	TDR&TXV	15.2			12.7	*9MPV050
	ENH4X31*17**	28400	TDR&TXV	15.2			12.7	*9MPV075
	ENH4X31*17**	28600	TDR&TXV	15.5			13	*9MPV100
	ENH4X31*17**	28600	TDR&TXV	16			13.2	*9MPV125
	ENH4X31*17**	28400	TDR&TXV	15			12.5	*9MVX040
	ENH4X31*17**	28600	TDR&TXV	15.5			12.5	*9MVX060
	ENH4X31*17**	28800	TDR&TXV	16			13	*9MVX080
	ENH4X31*17**	28600	TDR&TXV	16			13	*9MVX100
	ENH4X31*17**	28400	TDR&TXV	15.5			13	OLV098A12A
	ENH4X31*17**	28600	TDR&TXV	15.5			13	OLV112A16A
	ENH4X31*17**	28400	TDR&TXV	15.5			13	OMV098J12A
	ENH4X31*17**	28400	TDR&TXV	16			13	OMV112K14A
	ENH4X31*17**	28400	TXV			14.5	12	
	ENH4X36*17**	27600	TDR&TXV	15.5			12.5	*8MV*0701412**
	ENH4X36*17**	27800	TDR&TXV	15.5			13	*8MV*0901716**
	ENH4X36*17**	27800	TDR&TXV	15.5			13	*8MV*1102120**
	ENH4X36*17**	27800	TDR&TXV	16			13	*8MV*1352422**
	ENH4X36*17**	27800	TDR&TXV	15			12.5	*8MX*0701716**
	ENH4X36*17**	27800	TDR&TXV	15.5			12.5	*8MX*0902116**
	ENH4X36*17**	27600	TDR&TXV	15.2			12.5	*9MA*0601714A**
	ENH4X36*17**	27800	TDR&TXV	15.5			12.7	*9MA*0801714A**
	ENH4X36*17**	28000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ENH4X36*17**	27800	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ENH4X36*17**	27400	TDR&TXV	14			11.5	*9MV*0401410A**
	ENH4X36*17**	27600	TDR&TXV	15			12.7	*9MV*0601714A**
	ENH4X36*17**	27800	TDR&TXV	15.5			12.7	*9MV*0801716A**
	ENH4X36*17**	27800	TDR&TXV	15.5			12.7	*9MV*1002116A**
	ENH4X36*17**	27800	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ENH4X36*17**	27600	TDR&TXV	13.5			11.2	*9MX*0401410A**
	ENH4X36*17**	27800	TDR&TXV	15			12.7	*9MX*0601714A**
	ENH4X36*17**	28000	TDR&TXV	15			12.7	*9MX*0801716A**
	ENH4X36*17**	28000	TDR&TXV	16			13	MV08B15**B*
	ENH4X36*17**	28000	TDR&TXV	16			13.2	MV12F19**B*
	ENH4X36*17**	27600	TDR&TXV	14.5			12.2	*9MPV050
	ENH4X36*17**	27800	TDR&TXV	15			12.5	*9MPV075
	ENH4X36*17**	28000	TDR&TXV	15.2			12.7	*9MPV100
	ENH4X36*17**	28000	TDR&TXV	15.5			13	*9MPV125
	ENH4X36*17**	27800	TDR&TXV	15			12	*9MVX040
	ENH4X36*17**	27800	TDR&TXV	15			12.5	*9MVX060
	ENH4X36*17**	28200	TDR&TXV	15.5			12.5	*9MVX080
	ENH4X36*17**	28000	TDR&TXV	15.5			13	*9MVX100
	ENH4X36*17**	27800	TDR&TXV	15			12.5	OLV098A12A

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA630GKA	ENH4X36*17**	28000	TDR&TXV	15.5			12.5	OLV112A16A
	ENH4X36*17**	27800	TDR&TXV	15			12.5	OMV098J12A
	ENH4X36*17**	27800	TDR&TXV	15.5			12.5	OMV112K14A
	ENH4X36*17**	27800	TXV			14	12	
	ENH4X42*21**	28000	TDR&TXV	15.5			13	*8MV*0701412**
	ENH4X42*21**	28000	TDR&TXV	16			13	*8MV*0901716**
	ENH4X42*21**	28000	TDR&TXV	16			13	*8MV*1102120**
	ENH4X42*21**	28000	TDR&TXV	16			13	*8MV*1352422**
	ENH4X42*21**	28200	TDR&TXV	15.5			12.5	*8MX*0701716**
	ENH4X42*21**	28200	TDR&TXV	16			13	*8MX*0902116**
	ENH4X42*21**	27800	TDR&TXV	15.5			12.7	*9MA*0601714A**
	ENH4X42*21**	28000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	ENH4X42*21**	28200	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ENH4X42*21**	28200	TDR&TXV	16			13	*9MA*1202422A**
	ENH4X42*21**	27600	TDR&TXV	14.2			11.8	*9MV*0401410A**
	ENH4X42*21**	28000	TDR&TXV	15.5			12.7	*9MV*0601714A**
	ENH4X42*21**	28000	TDR&TXV	15.5			12.7	*9MV*0801716A**
	ENH4X42*21**	28000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	ENH4X42*21**	28200	TDR&TXV	16			13	*9MV*1202422A**
	ENH4X42*21**	27800	TDR&TXV	13.7			11.4	*9MX*0401410A**
	ENH4X42*21**	28200	TDR&TXV	15.5			12.7	*9MX*0601714A**
	ENH4X42*21**	28400	TDR&TXV	15.5			12.7	*9MX*0801716A**
	ENH4X42*21**	28200	TXV			14.2	12	
* Tested Combo								
2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.								
† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device								

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	*EN(A,D)4X37*17**	34400	TXV			14.5	12	
	FCM4X24****	33000	TDR&TXV	15			12	
	FCM4X36****	33200	TDR&TXV	16			13	
	FCM4X48****	34200	TDR&TXV	16.5			13	
	FCM4X60****	34600	TDR&TXV	16.5			13.5	
	FEA4X36**A*	33200	TDR&TXV	14			11.5	
	FEM4P36**A*	33000	TDR		14.5		12	
	FEM4P42**A*	34200	TDR		15.5		12.5	
	FEM4P48**A*	34200	TDR		15		12.5	
	FEM4X36****	34000	TDR&TXV	15.2			12.5	
	FEM4X42****	34000	TDR&TXV	15.2			12.2	
	FS(M,U)4P36**A*	33400	TDR		14.5		12	
	FS(M,U)4P42**A*	33800	TDR		14.5		12	
	FSA4X36**A*	33000	TDR&TXV	13.5			11	
	FVM4X36****	33200	TDR&TXV	16			13	
	FVM4X48****	34200	TDR&TXV	16.5			13.2	
	FVM4X60****	34600	TDR&TXV	16.5			13.5	
	FXM4X36**A*	34200	TDR&TXV	15.5			13	
	FXM4X42**A*	34200	TDR&TXV	15.5			13	
	FXM4X48**A*	34800	TDR&TXV	16			13	
	EA*4X36*14A*	32800	TDR&TXV	15			12	*8MV*0701412**
	EA*4X36*14A*	32600	TDR&TXV	14			11.5	*8MX*0451408**
	EA*4X36*14A*	33000	TDR&TXV	15.5			12.5	MV08B15**B*
	EA*4X36*14A*	32800	TXV			14	11.5	
	EA*4X36*17A*	32800	TDR&TXV	15			12	*8MV*0701412**
	EA*4X36*17A*	33000	TDR&TXV	15.5			12.5	*8MV*0901716**
	EA*4X36*17A*	32800	TDR&TXV	14.5			12	*8MX*0451408**
	EA*4X36*17A*	33000	TDR&TXV	15			12	*8MX*0701716**
	EA*4X36*17A*	32400	TDR&TXV	15			12	*9MA*0601714A**
	EA*4X36*17A*	32600	TDR&TXV	15.5			12.5	*9MA*0801714A**
	EA*4X36*17A*	32800	TDR&TXV	15			12	*9MV*0601714A**
	EA*4X36*17A*	33000	TDR&TXV	15.2			12.2	*9MV*0801716A**
	EA*4X36*17A*	32800	TDR&TXV	15			12	*9MX*0601714A**
	EA*4X36*17A*	32800	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EA*4X36*17A*	33200	TDR&TXV	15.5			12.7	MV08B15**B*
	EA*4X36*17A*	33200	TDR&TXV	15.5			12.7	MV12F19**B*
	EA*4X36*17A*	32800	TDR&TXV	14			11.7	*9MPV050
	EA*4X36*17A*	32800	TDR&TXV	14.5			12	*9MPV075
	EA*4X36*17A*	32800	TDR&TXV	14.5			12	OLV098A12A
	EA*4X36*17A*	32800	TDR&TXV	14.5			12	OMV098J12A
	EA*4X36*17A*	33000	TDR&TXV	15			12.5	OMV112K14A
	EA*4X36*17A*	33000	TXV			14	11.5	
	EA*4X36*21A*	33000	TDR&TXV	15.5			12.5	*8MV*0901716**
	EA*4X36*21A*	33000	TDR&TXV	15.5			12.5	*8MV*1102120**
	EA*4X36*21A*	33000	TDR&TXV	15			12	*8MX*0701716**
	EA*4X36*21A*	33200	TDR&TXV	15.5			12.5	*8MX*0902116**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	EA*4X36*21A*	33400	TDR&TXV	15.5			12.5	*8MX*1102120**
	EA*4X36*21A*	32600	TDR&TXV	15.2			12.2	*9MA*0601714A**
	EA*4X36*21A*	32600	TDR&TXV	15.5			12.5	*9MA*0801714A**
	EA*4X36*21A*	32800	TDR&TXV	15.5			12.5	*9MA*1002120A**
	EA*4X36*21A*	33000	TDR&TXV	15			12	*9MV*0601714A**
	EA*4X36*21A*	33000	TDR&TXV	15.2			12.5	*9MV*0801716A**
	EA*4X36*21A*	33200	TDR&TXV	15.5			12.5	*9MV*1002116A**
	EA*4X36*21A*	33000	TDR&TXV	15			12	*9MX*0601714A**
	EA*4X36*21A*	33000	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EA*4X36*21A*	33200	TDR&TXV	15.5			13	MV12F19**B*
	EA*4X36*21A*	33200	TDR&TXV	16			13	MV16J22**B*
	EA*4X36*21A*	32800	TDR&TXV	14			11.7	*9MPV050
	EA*4X36*21A*	33000	TDR&TXV	14.5			12	*9MPV075
	EA*4X36*21A*	33400	TDR&TXV	15.2			12.2	*9MPV100
	EA*4X36*21A*	33200	TDR&TXV	15			12.5	OLV112A16A
	EA*4X36*21A*	33000	TXV			14	11.5	
	EA*4X42*21A*	33200	TDR&TXV	15.5			12.5	*8MV*0901716**
	EA*4X42*21A*	33200	TDR&TXV	15.5			12.5	*8MV*1102120**
	EA*4X42*21A*	33200	TDR&TXV	15			12	*8MX*0701716**
	EA*4X42*21A*	33400	TDR&TXV	16			13	*8MX*0902116**
	EA*4X42*21A*	33600	TDR&TXV	16			13	*8MX*1102120**
	EA*4X42*21A*	32800	TDR&TXV	15			12.5	*9MA*0601714A**
	EA*4X42*21A*	32800	TDR&TXV	15.5			12.5	*9MA*0801714A**
	EA*4X42*21A*	33000	TDR&TXV	15.5			12.5	*9MA*1002120A**
	EA*4X42*21A*	33200	TDR&TXV	15			12	*9MV*0601714A**
	EA*4X42*21A*	33200	TDR&TXV	15			12.5	*9MV*0801716A**
	EA*4X42*21A*	33400	TDR&TXV	15.5			12.5	*9MV*1002116A**
	EA*4X42*21A*	33200	TDR&TXV	15.2			12	*9MX*0601714A**
	EA*4X42*21A*	33000	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EA*4X42*21A*	33400	TDR&TXV	16			13	MV12F19**B*
	EA*4X42*21A*	33400	TDR&TXV	16			13	MV16J22**B*
	EA*4X42*21A*	33000	TDR&TXV	14.5			12	*9MPV050
	EA*4X42*21A*	33200	TDR&TXV	14.5			12	*9MPV075
	EA*4X42*21A*	33600	TDR&TXV	15.2			12.2	*9MPV100
	EA*4X42*21A*	33400	TDR&TXV	15			12.5	OLV112A16A
	EA*4X42*21A*	33400	TXV			14	11.5	
	EA*4X42*24A*	33200	TDR&TXV	15.5			12.7	*8MV*1102120**
	EA*4X42*24A*	33200	TDR&TXV	16			13	*8MV*1352422**
	EA*4X42*24A*	33600	TDR&TXV	16			13	*8MX*0902116**
	EA*4X42*24A*	33600	TDR&TXV	16			13	*8MX*1102120**
	EA*4X42*24A*	33000	TDR&TXV	15.5			12.5	*9MA*1002120A**
	EA*4X42*24A*	33000	TDR&TXV	16			12.5	*9MA*1202422A**
	EA*4X42*24A*	33400	TDR&TXV	15.5			12.5	*9MV*1002116A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	EA*4X42*24A*	33400	TDR&TXV	15.5			12.5	*9MV*1202422A**
	EA*4X42*24A*	33400	TDR&TXV	16			13	MV16J22**B*
	EA*4X42*24A*	33400	TDR&TXV	16			13	MV20L24**B*
	EA*4X42*24A*	33800	TDR&TXV	15.2			12.5	*9MPV100
	EA*4X42*24A*	33800	TDR&TXV	15.5			12.5	*9MPV125
	EA*4X42*24A*	33600	TDR&TXV	15.5			12.5	*9MVX100
	EA*4X42*24A*	33400	TXV			14	11.5	
	EA*4X48*17A*	33600	TDR&TXV	15.5			12.5	*8MV*0701412**
	EA*4X48*17A*	33800	TDR&TXV	16			13	*8MV*0901716**
	EA*4X48*17A*	33800	TDR&TXV	15			12	*8MX*0451408**
	EA*4X48*17A*	33800	TDR&TXV	15			12.5	*8MX*0701716**
	EA*4X48*17A*	33400	TDR&TXV	15.5			12.5	*9MA*0601714A**
	EA*4X48*17A*	33400	TDR&TXV	15.5			12.5	*9MA*0801714A**
	EA*4X48*17A*	33800	TDR&TXV	15.5			12.5	*9MV*0601714A**
	EA*4X48*17A*	33800	TDR&TXV	15.5			12.5	*9MV*0801716A**
	EA*4X48*17A*	33800	TDR&TXV	15.5			12.5	*9MX*0601714A**
	EA*4X48*17A*	33800	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EA*4X48*17A*	34000	TXV			14.5	12	
	EA*4X48*21A*	33600	TDR&TXV	16			13	*8MV*0901716**
	EA*4X48*21A*	33600	TDR&TXV	16			13	*8MV*1102120**
	EA*4X48*21A*	33600	TDR&TXV	15			12.5	*8MX*0701716**
	EA*4X48*21A*	34000	TDR&TXV	16			13	*8MX*0902116**
	EA*4X48*21A*	34000	TDR&TXV	16			13	*8MX*1102120**
	EA*4X48*21A*	33200	TDR&TXV	15.5			12.5	*9MA*0601714A**
	EA*4X48*21A*	33200	TDR&TXV	15.5			12.5	*9MA*0801714A**
	EA*4X48*21A*	33400	TDR&TXV	15.5			12.5	*9MA*1002120A**
	EA*4X48*21A*	33600	TDR&TXV	15.2			12.5	*9MV*0601714A**
	EA*4X48*21A*	33600	TDR&TXV	15.5			12.5	*9MV*0801716A**
	EA*4X48*21A*	33800	TDR&TXV	15.5			12.5	*9MV*1002116A**
	EA*4X48*21A*	33600	TDR&TXV	15.5			12.5	*9MX*0601714A**
	EA*4X48*21A*	33400	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EA*4X48*21A*	33800	TXV			14.2	11.7	
	EA*4X48*24A*	33600	TDR&TXV	16			13	*8MV*1102120**
	EA*4X48*24A*	33600	TDR&TXV	16			13	*8MV*1352422**
	EA*4X48*24A*	34000	TDR&TXV	16			13	*8MX*0902116**
	EA*4X48*24A*	34200	TDR&TXV	16			13	*8MX*1102120**
	EA*4X48*24A*	33400	TDR&TXV	15.5			12.5	*9MA*1002120A**
	EA*4X48*24A*	33400	TDR&TXV	16			13	*9MA*1202422A**
	EA*4X48*24A*	33800	TDR&TXV	15.5			12.5	*9MV*1002116A**
	EA*4X48*24A*	33800	TDR&TXV	16			13	*9MV*1202422A**
	EA*4X48*24A*	33800	TXV			14.2	11.7	
	ED*4X36B**	32800	TDR&TXV	15			12.2	*8MV*0701412**
	ED*4X36B**	32600	TDR&TXV	14			11.7	*8MX*0451408**
	ED*4X36B**	33000	TDR&TXV	15.5			12.5	MV08B15**B*
	ED*4X36B**	32800	TXV			14	11.5	
	ED*4X36F**	32400	TDR&TXV	15			12	*9MA*0601714A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	ED*4X36F**	32600	TDR&TXV	15.2			12.5	*9MA*0801714A**
	ED*4X36F**	32800	TDR&TXV	15.5			12.5	*9MA*1002120A**
	ED*4X36F**	32800	TDR&TXV	15			12	*9MV*0601714A**
	ED*4X36F**	33000	TDR&TXV	15.2			12.2	*9MV*0801716A**
	ED*4X36F**	33000	TDR&TXV	15			12.5	*9MV*1002116A**
	ED*4X36F**	32800	TDR&TXV	15			12	*9MX*0601714A**
	ED*4X36F**	32800	TDR&TXV	15			12.2	*9MX*0801716A**
	ED*4X36F**	33200	TDR&TXV	15.5			12.7	MV08B15**B*
	ED*4X36F**	33200	TDR&TXV	16			13	MV12F19**B*
	ED*4X36F**	32800	TDR&TXV	14			11.7	*9MPV050
	ED*4X36F**	32800	TDR&TXV	14.5			12	*9MPV075
	ED*4X36F**	32800	TDR&TXV	14.5			11.5	*9MVX040
	ED*4X36F**	33000	TDR&TXV	14.5			12	*9MVX060
	ED*4X36F**	33000	TXV			14	11.5	
	ED*4X36J**	33000	TDR&TXV	15.5			12.5	*8MV*1102120**
	ED*4X36J**	33000	TDR&TXV	15.5			12.7	*8MV*1352422**
	ED*4X36J**	33200	TDR&TXV	15.5			12.7	*8MX*0902116**
	ED*4X36J**	33400	TDR&TXV	15.5			12.7	*8MX*1102120**
	ED*4X36J**	32800	TDR&TXV	15.2			12.5	*9MA*1002120A**
	ED*4X36J**	32800	TDR&TXV	15.5			12.5	*9MA*1202422A**
	ED*4X36J**	33200	TDR&TXV	15.2			12.2	*9MV*1002116A**
	ED*4X36J**	33000	TDR&TXV	15.5			12.5	*9MV*1202422A**
	ED*4X36J**	33200	TDR&TXV	15.5			13	MV12F19**B*
	ED*4X36J**	33200	TDR&TXV	16			13	MV16J22**B*
	ED*4X36J**	33200	TDR&TXV	16			13	MV20L24**B*
	ED*4X36J**	32800	TDR&TXV	14			11.7	*9MPV050
	ED*4X36J**	33000	TDR&TXV	14.5			12	*9MPV075
	ED*4X36J**	33400	TDR&TXV	15.2			12.2	*9MPV100
	ED*4X36J**	33600	TDR&TXV	15.2			12.5	*9MPV125
	ED*4X36J**	32800	TDR&TXV	14			11.7	*9MVX040
	ED*4X36J**	33200	TDR&TXV	14.5			12	*9MVX060
	ED*4X36J**	33600	TDR&TXV	15			12.2	*9MVX080
	ED*4X36J**	33400	TDR&TXV	15.2			12.5	*9MVX100
	ED*4X36J**	33200	TDR&TXV	15			12.2	OLV112A16A
	ED*4X36J**	33000	TXV			14	11.5	
	ED*4X42F**	33200	TDR&TXV	15.5			12.7	*8MV*0901716**
	ED*4X42F**	33200	TDR&TXV	15.5			12.7	*8MV*1102120**
	ED*4X42F**	33200	TDR&TXV	15			12.2	*8MX*0701716**
	ED*4X42F**	33400	TDR&TXV	15.5			12.7	*8MX*0902116**
	ED*4X42F**	33600	TDR&TXV	15.5			12.7	*8MX*1102120**
	ED*4X42F**	32800	TDR&TXV	15			12.2	*9MA*0601714A**
	ED*4X42F**	32800	TDR&TXV	15.2			12.5	*9MA*0801714A**
	ED*4X42F**	33000	TDR&TXV	15.2			12.5	*9MA*1002120A**
	ED*4X42F**	33000	TDR&TXV	15			12	*9MV*0601714A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	ED*4X42F**	33200	TDR&TXV	15.2			12.2	*9MV*0801716A**
	ED*4X42F**	33200	TDR&TXV	15.2			12.2	*9MV*1002116A**
	ED*4X42F**	33200	TDR&TXV	15			12.2	*9MX*0601714A**
	ED*4X42F**	33000	TDR&TXV	15.2			12.2	*9MX*0801716A**
	ED*4X42F**	33400	TDR&TXV	16			13	MV08B15**B*
	ED*4X42F**	33400	TDR&TXV	16			13	MV12F19**B*
	ED*4X42F**	33000	TDR&TXV	14.5			11.7	*9MPV050
	ED*4X42F**	33200	TDR&TXV	14.5			12	*9MPV075
	ED*4X42F**	33000	TDR&TXV	14.5			11.7	*9MVX040
	ED*4X42F**	33200	TDR&TXV	14.5			12	*9MVX060
	ED*4X42F**	33000	TDR&TXV	14.5			12	OLV098A12A
	ED*4X42F**	33200	TDR&TXV	15			12.2	OLV112A16A
	ED*4X42F**	33000	TDR&TXV	14.5			12	OMV098J12A
	ED*4X42F**	33200	TDR&TXV	15.2			12.2	OMV112K14A
	ED*4X42F**	33400	TXV			14	11.5	
	ED*4X42J**	33200	TDR&TXV	15.5			12.7	*8MV*1102120**
	ED*4X42J**	33200	TDR&TXV	16			13	*8MV*1352422**
	ED*4X42J**	33400	TDR&TXV	15.5			12.7	*8MX*0902116**
	ED*4X42J**	33600	TDR&TXV	16			13	*8MX*1102120**
	ED*4X42J**	33000	TDR&TXV	15.5			12.5	*9MA*1002120A**
	ED*4X42J**	33000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ED*4X42J**	33400	TDR&TXV	15.2			12.5	*9MV*1002116A**
	ED*4X42J**	33200	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ED*4X42J**	33400	TDR&TXV	16			13	MV12F19**B*
	ED*4X42J**	33400	TDR&TXV	16			13	MV16J22**B*
	ED*4X42J**	33400	TDR&TXV	16			13	MV20L24**B*
	ED*4X42J**	33000	TDR&TXV	14.5			12	*9MPV050
	ED*4X42J**	33200	TDR&TXV	14.5			12	*9MPV075
	ED*4X42J**	33600	TDR&TXV	15.2			12.2	*9MPV100
	ED*4X42J**	33800	TDR&TXV	15.5			12.5	*9MPV125
	ED*4X42J**	33000	TDR&TXV	14.5			12	*9MVX040
	ED*4X42J**	33400	TDR&TXV	14.5			12	*9MVX060
	ED*4X42J**	33800	TDR&TXV	15.2			12.2	*9MVX080
	ED*4X42J**	33600	TDR&TXV	15.5			12.5	*9MVX100
	ED*4X42J**	33400	TDR&TXV	15.2			12.2	OLV112A16A
	ED*4X42J**	33400	TXV			14	11.5	
	ED*4X42L**	33200	TDR&TXV	15.5			12.7	*8MV*1102120**
	ED*4X42L**	33200	TDR&TXV	16			13	*8MV*1352422**
	ED*4X42L**	33600	TDR&TXV	16			13	*8MX*0902116**
	ED*4X42L**	33600	TDR&TXV	16			13	*8MX*1102120**
	ED*4X42L**	33000	TDR&TXV	15.5			12.5	*9MA*1002120A**
	ED*4X42L**	33000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ED*4X42L**	33400	TDR&TXV	15.2			12.5	*9MV*1002116A**
	ED*4X42L**	33400	TDR&TXV	15.5			12.7	*9MV*1202422A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	ED*4X42L**	33400	TDR&TXV	16			13	MV16J22**B*
	ED*4X42L**	33400	TDR&TXV	16			13	MV20L24**B*
	ED*4X42L**	33800	TDR&TXV	15.2			12.5	*9MPV100
	ED*4X42L**	33800	TDR&TXV	15.5			12.5	*9MPV125
	ED*4X42L**	33800	TDR&TXV	15.2			12.2	*9MVX080
	ED*4X42L**	33600	TDR&TXV	15.5			12.5	*9MVX100
	ED*4X42L**	33400	TDR&TXV	15.2			12.2	OLV112A16A
	ED*4X42L**	34000	TDR&TXV	15.5			12.7	OLV154F20A
	ED*4X42L**	33400	TXV			14	11.5	
	ED*4X48J**	33400	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ED*4X48J**	33400	TDR&TXV	16			13	*9MA*1202422A**
	ED*4X48J**	33800	TDR&TXV	15.5			12.5	*9MV*1002116A**
	ED*4X48J**	33600	TDR&TXV	16			13	*9MV*1202422A**
	ED*4X48J**	33800	TDR&TXV	15			12	*9MVX060
	ED*4X48J**	34200	TDR&TXV	15			12.5	*9MVX080
	ED*4X48J**	33800	TXV			14.2	11.7	
	EHD4X36A**	33400	TDR&TXV	15.5			12.5	*8MV*0701412**
	EHD4X36A**	33600	TDR&TXV	16			13	*8MV*0901716**
	EHD4X36A**	33600	TDR&TXV	16			13	*8MV*1102120**
	EHD4X36A**	33600	TDR&TXV	16			13	*8MV*1352422**
	EHD4X36A**	33600	TDR&TXV	14.5			12	*8MX*0451408**
	EHD4X36A**	33600	TDR&TXV	15			12	*8MX*0701716**
	EHD4X36A**	33800	TDR&TXV	16			13	*8MX*0902116**
	EHD4X36A**	34000	TDR&TXV	16			13	*8MX*1102120**
	EHD4X36A**	33200	TDR&TXV	15.5			12.5	*9MA*0601714A**
	EHD4X36A**	33200	TDR&TXV	15.5			12.5	*9MA*0801714A**
	EHD4X36A**	33400	TDR&TXV	15.5			12.5	*9MA*1002120A**
	EHD4X36A**	33400	TDR&TXV	16			13	*9MA*1202422A**
	EHD4X36A**	33600	TDR&TXV	15.2			12.2	*9MV*0601714A**
	EHD4X36A**	33600	TDR&TXV	15.5			12.5	*9MV*0801716A**
	EHD4X36A**	33600	TDR&TXV	15.5			12.5	*9MV*1002116A**
	EHD4X36A**	33600	TDR&TXV	16			13	*9MV*1202422A**
	EHD4X36A**	33600	TDR&TXV	15			12.5	*9MX*0601714A**
	EHD4X36A**	33400	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EHD4X36A**	33800	TDR&TXV	16			13	MV08B15**B*
	EHD4X36A**	34000	TDR&TXV	16			13	MV12F19**B*
	EHD4X36A**	34000	TDR&TXV	16			13	MV16J22**B*
	EHD4X36A**	34000	TDR&TXV	16			13	MV20L24**B*
	EHD4X36A**	33400	TDR&TXV	14.5			11.7	*9MPV050
	EHD4X36A**	33600	TDR&TXV	15			12	*9MPV075
EHD4X36A**	34000	TDR&TXV	15.2			12.5	*9MPV100	
EHD4X36A**	34200	TDR&TXV	15.5			12.7	*9MPV125	
EHD4X36A**	33400	TDR&TXV	14.5			12	*9MVX040	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	EHD4X36A**	33800	TDR&TXV	15			12	*9MVX060
	EHD4X36A**	34200	TDR&TXV	15			12.5	*9MVX080
	EHD4X36A**	34000	TDR&TXV	15.5			12.5	*9MVX100
	EHD4X36A**	33400	TDR&TXV	15			12	OLV098A12A
	EHD4X36A**	33800	TDR&TXV	15			12.5	OLV112A16A
	EHD4X36A**	34400	TDR&TXV	15.5			12.5	OLV154F20A
	EHD4X36A**	33400	TDR&TXV	15			12	OMV098J12A
	EHD4X36A**	33600	TDR&TXV	15.5			12.5	OMV112K14A
	EHD4X36A**	33800	TXV			14.2	11.7	
	EHD4X42A**	33600	TDR&TXV	15.5			12.5	*8MV*0701412**
	EHD4X42A**	33800	TDR&TXV	16			13	*8MV*0901716**
	EHD4X42A**	33800	TDR&TXV	16			13	*8MV*1102120**
	EHD4X42A**	33800	TDR&TXV	16			13	*8MV*1352422**
	EHD4X42A**	33800	TDR&TXV	15			12	*8MX*0451408**
	EHD4X42A**	33800	TDR&TXV	15			12.5	*8MX*0701716**
	EHD4X42A**	34000	TDR&TXV	16			13	*8MX*0902116**
	EHD4X42A**	34200	TDR&TXV	16			13	*8MX*1102120**
	EHD4X42A**	33400	TDR&TXV	15.5			12.5	*9MA*0601714A**
	EHD4X42A**	33400	TDR&TXV	15.5			12.5	*9MA*0801714A**
	EHD4X42A**	33600	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EHD4X42A**	33600	TDR&TXV	16			13	*9MA*1202422A**
	EHD4X42A**	33800	TDR&TXV	15.5			12.5	*9MV*0601714A**
	EHD4X42A**	33800	TDR&TXV	15.5			12.5	*9MV*0801716A**
	EHD4X42A**	34000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EHD4X42A**	33800	TDR&TXV	16			13	*9MV*1202422A**
	EHD4X42A**	33800	TDR&TXV	15.5			12.5	*9MX*0601714A**
	EHD4X42A**	33600	TDR&TXV	15.5			12.7	*9MX*0801716A**
	EHD4X42A**	34000	TDR&TXV	16			13	MV08B15**B*
	EHD4X42A**	34200	TDR&TXV	16			13.2	MV12F19**B*
	EHD4X42A**	34200	TDR&TXV	16.5			13.2	MV16J22**B*
	EHD4X42A**	34200	TDR&TXV	16			13.2	MV20L24**B*
	EHD4X42A**	33800	TDR&TXV	14.5			12	*9MPV050
	EHD4X42A**	33800	TDR&TXV	15			12.2	*9MPV075
	EHD4X42A**	34400	TDR&TXV	15.5			12.5	*9MPV100
	EHD4X42A**	34400	TDR&TXV	15.5			12.7	*9MPV125
	EHD4X42A**	33600	TDR&TXV	14.5			12	*9MVX040
	EHD4X42A**	34000	TDR&TXV	15			12	*9MVX060
	EHD4X42A**	34400	TDR&TXV	15			12.5	*9MVX080
	EHD4X42A**	34200	TDR&TXV	16			13	*9MVX100
	EHD4X42A**	33600	TDR&TXV	15			12	OLV098A12A
	EHD4X42A**	34000	TDR&TXV	15.5			12.5	OLV112A16A
	EHD4X42A**	34600	TDR&TXV	15.5			12.5	OLV154F20A
	EHD4X42A**	33600	TDR&TXV	15			12	OMV098J12A
	EHD4X42A**	33800	TDR&TXV	15.5			12.5	OMV112K14A
	EHD4X42A**	34000	TXV			14.5	12	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	EHD4X48A**	33800	TDR&TXV	15.5			12.5	*8MV*0701412**
	EHD4X48A**	33800	TDR&TXV	16			13	*8MV*0901716**
	EHD4X48A**	34000	TDR&TXV	16			13	*8MV*1102120**
	EHD4X48A**	34000	TDR&TXV	16			13	*8MV*1352422**
	EHD4X48A**	34000	TDR&TXV	15			12	*8MX*0451408**
	EHD4X48A**	34000	TDR&TXV	15			12.5	*8MX*0701716**
	EHD4X48A**	34200	TDR&TXV	16			13	*8MX*0902116**
	EHD4X48A**	34400	TDR&TXV	16			13	*8MX*1102120**
	EHD4X48A**	33400	TDR&TXV	15.5			12.5	*9MA*0601714A**
	EHD4X48A**	33600	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EHD4X48A**	33800	TDR&TXV	16			13	*9MA*1002120A**
	EHD4X48A**	33800	TDR&TXV	16			13	*9MA*1202422A**
	EHD4X48A**	33800	TDR&TXV	15.5			12.5	*9MV*0601714A**
	EHD4X48A**	34000	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EHD4X48A**	34000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EHD4X48A**	34000	TDR&TXV	16			13	*9MV*1202422A**
	EHD4X48A**	34000	TDR&TXV	15.5			12.5	*9MX*0601714A**
	EHD4X48A**	33800	TDR&TXV	15.5			12.7	*9MX*0801716A**
	EHD4X48A**	34200	TXV			14.5	12	
	EN(A,D)4X36*21**	32800	TDR&TXV	15			12.5	*8MV*0901716**
	EN(A,D)4X36*21**	33000	TDR&TXV	15			12.5	*8MV*1102120**
	EN(A,D)4X36*21**	32800	TDR&TXV	14.5			12	*8MX*0701716**
	EN(A,D)4X36*21**	33000	TDR&TXV	15.5			12.5	*8MX*0902116**
	EN(A,D)4X36*21**	33200	TDR&TXV	15.5			12.5	*8MX*1102120**
	EN(A,D)4X36*21**	32400	TDR&TXV	15			12	*9MA*0601714A**
	EN(A,D)4X36*21**	32600	TDR&TXV	15.2			12	*9MA*0801714A**
	EN(A,D)4X36*21**	32600	TDR&TXV	15.2			12.5	*9MA*1002120A**
	EN(A,D)4X36*21**	32800	TDR&TXV	15			12	*9MV*0601714A**
	EN(A,D)4X36*21**	32800	TDR&TXV	15.2			12	*9MV*0801716A**
	EN(A,D)4X36*21**	32800	TDR&TXV	15.2			12	*9MV*1002116A**
	EN(A,D)4X36*21**	32800	TDR&TXV	15			12	*9MX*0601714A**
	EN(A,D)4X36*21**	32600	TDR&TXV	15.2			12.5	*9MX*0801716A**
	EN(A,D)4X36*21**	33200	TDR&TXV	16			13	MV12F19**B*
	EN(A,D)4X36*21**	33200	TDR&TXV	16			13	MV16J22**B*
	EN(A,D)4X36*21**	32600	TDR&TXV	14			11.7	*9MPV050
	EN(A,D)4X36*21**	32800	TDR&TXV	14.5			12	*9MPV075
	EN(A,D)4X36*21**	33200	TDR&TXV	15			12.2	*9MPV100
	EN(A,D)4X36*21**	32600	TDR&TXV	14			11.5	*9MVX040
	EN(A,D)4X36*21**	33000	TDR&TXV	14.5			12	*9MVX060
	EN(A,D)4X36*21**	33400	TDR&TXV	15			12	*9MVX080
	EN(A,D)4X36*21**	33000	TDR&TXV	14.5			12	OLV112A16A
	EN(A,D)4X36*21**	33000	TXV			14	11.5	
	EN(A,D)4X37*17**	34000	TDR&TXV	15.5			12.5	*8MV*0701412**
	EN(A,D)4X37*17**	34000	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D)4X37*17**	34000	TDR&TXV	15			12	*8MX*0451408**
	EN(A,D)4X37*17**	34200	TDR&TXV	15.5			12.5	*8MX*0701716**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA636GKA	EN(A,D)4X37*17**	33600	TDR&TXV	15.5			12.5	*9MA*0601714A**
	EN(A,D)4X37*17**	33800	TDR&TXV	16			13	*9MA*0801714A**
	EN(A,D)4X37*17**	33600	TDR&TXV	15.5			12.5	*9MV*0601714A**
	EN(A,D)4X37*17**	33800	TDR&TXV	16			13	*9MV*0801716A**
	EN(A,D)4X37*17**	34000	TDR&TXV	15.5			12.5	*9MX*0601714A**
	EN(A,D)4X37*17**	34000	TDR&TXV	16			13	*9MX*0801716A**
	EN(A,D)4X37*17**	34400	TDR&TXV	16			13	MV08B15**B*
	EN(A,D)4X37*17**	34400	TDR&TXV	16			13.2	MV12F19**B*
	EN(A,D)4X37*17**	34000	TDR&TXV	14.5			12	*9MPV050
	EN(A,D)4X37*17**	34000	TDR&TXV	15			12.2	*9MPV075
	EN(A,D)4X37*17**	34000	TDR&TXV	15			12	*9MVX040
	EN(A,D)4X37*17**	34200	TDR&TXV	15			12.5	*9MVX060
	EN(A,D)4X37*17**	33800	TDR&TXV	15			12.5	OLV098A12A
	EN(A,D)4X37*17**	34000	TDR&TXV	15			12.5	OMV098J12A
	EN(A,D)4X37*17**	34000	TDR&TXV	15.5			12.5	OMV112K14A
	EN(A,D)4X43*24**	34200	TDR&TXV	16			13	*8MV*1102120**
	EN(A,D)4X43*24**	34200	TDR&TXV	16			13	*8MV*1352422**
	EN(A,D)4X43*24**	34600	TDR&TXV	16			13	*8MX*0902116**
	EN(A,D)4X43*24**	34800	TDR&TXV	16			13	*8MX*1102120**
	EN(A,D)4X43*24**	34000	TDR&TXV	16			13	*9MA*1002120A**
	EN(A,D)4X43*24**	34000	TDR&TXV	16.5			13.2	*9MA*1202422A**
	EN(A,D)4X43*24**	34000	TDR&TXV	16			13	*9MV*1002116A**
	EN(A,D)4X43*24**	34000	TDR&TXV	16.5			13.2	*9MV*1202422A**
	EN(A,D)4X43*24**	34400	TDR&TXV	16.5			13.5	MV16J22**B*
	EN(A,D)4X43*24**	34400	TDR&TXV	16.5			13.2	MV20L24**B*
	EN(A,D)4X43*24**	34800	TDR&TXV	15.5			12.7	*9MPV100
	EN(A,D)4X43*24**	34800	TDR&TXV	16			13	*9MPV125
	EN(A,D)4X43*24**	34800	TDR&TXV	16			13	*9MVX080
	EN(A,D)4X43*24**	34600	TDR&TXV	16			13	*9MVX100
	EN(A,D)4X43*24**	34400	TXV			14.5	12	
	EN(A,D)4X48*24**	33800	TDR&TXV	16			13	*8MV*1102120**
	EN(A,D)4X48*24**	33800	TDR&TXV	16			13	*8MV*1352422**
	EN(A,D)4X48*24**	34000	TDR&TXV	16			13	*8MX*0902116**
	EN(A,D)4X48*24**	34200	TDR&TXV	16			13	*8MX*1102120**
	EN(A,D)4X48*24**	33600	TDR&TXV	16			13	*9MA*1002120A**
	EN(A,D)4X48*24**	33600	TDR&TXV	16			13	*9MA*1202422A**
	EN(A,D)4X48*24**	34000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EN(A,D)4X48*24**	33800	TDR&TXV	16			13	*9MV*1202422A**
	EN(A,D)4X48*24**	34000	TXV			14.2	11.7	
	EN(A,D,W)4X36*17**	32800	TDR&TXV	15			12	*8MV*0701412**
	EN(A,D,W)4X36*17**	32800	TDR&TXV	15			12	*8MV*0901716**
	EN(A,D,W)4X36*17**	32800	TDR&TXV	14.5			11.5	*8MX*0451408**
	EN(A,D,W)4X36*17**	32800	TDR&TXV	14.5			12	*8MX*0701716**
	EN(A,D,W)4X36*17**	32400	TDR&TXV	15			12	*9MA*0601714A**
	EN(A,D,W)4X36*17**	32600	TDR&TXV	15.2			12	*9MA*0801714A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS					EER	Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER				
Standard	TDR			TXV				
CSA636GKA	EN(A,D,W)4X36*17**	30000	TDR&TXV	15			12	*9MV*0601714A**
	EN(A,D,W)4X36*17**	32800	TDR&TXV	15.2			12	*9MV*0801716A**
	EN(A,D,W)4X36*17**	32800	TDR&TXV	15			12	*9MX*0601714A**
	EN(A,D,W)4X36*17**	32600	TDR&TXV	15.2			12	*9MX*0801716A**
	EN(A,D,W)4X36*17**	33000	TDR&TXV	15.5			12.5	MV08B15**B*
	EN(A,D,W)4X36*17**	33200	TDR&TXV	15.5			12.7	MV12F19**B*
	EN(A,D,W)4X36*17**	32600	TDR&TXV	14			11.7	*9MPV050
	EN(A,D,W)4X36*17**	32600	TDR&TXV	14.5			12	*9MPV075
	EN(A,D,W)4X36*17**	32600	TDR&TXV	14			11.5	*9MVX040
	EN(A,D,W)4X36*17**	32800	TDR&TXV	14.5			12	*9MVX060
	EN(A,D,W)4X36*17**	32600	TDR&TXV	14.5			12	OLV098A12A
	EN(A,D,W)4X36*17**	32800	TDR&TXV	14.5			12	OMV098J12A
	EN(A,D,W)4X36*17**	32800	TDR&TXV	15			12	OMV112K14A
	EN(A,D,W)4X36*17**	33000	TXV			14	11.5	
	EN(A,D,W)4X42*21**	33200	TDR&TXV	15.5			12.5	*8MV*0901716**
	EN(A,D,W)4X42*21**	33200	TDR&TXV	15.5			12.5	*8MV*1102120**
	EN(A,D,W)4X42*21**	33200	TDR&TXV	15			12	*8MX*0701716**
	EN(A,D,W)4X42*21**	33400	TDR&TXV	15.5			12.5	*8MX*0902116**
	EN(A,D,W)4X42*21**	33600	TDR&TXV	16			13	*8MX*1102120**
	EN(A,D,W)4X42*21**	32800	TDR&TXV	15.2			12	*9MA*0601714A**
	EN(A,D,W)4X42*21**	32800	TDR&TXV	15.5			12.5	*9MA*0801714A**
	EN(A,D,W)4X42*21**	33000	TDR&TXV	15.5			12.5	*9MA*1002120A**
	EN(A,D,W)4X42*21**	33000	TDR&TXV	15			12	*9MV*0601714A**
	EN(A,D,W)4X42*21**	33200	TDR&TXV	15.5			12.5	*9MV*0801716A**
	EN(A,D,W)4X42*21**	33200	TDR&TXV	15.5			12.5	*9MV*1002116A**
	EN(A,D,W)4X42*21**	33200	TDR&TXV	15.2			12	*9MX*0601714A**
	EN(A,D,W)4X42*21**	33000	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EN(A,D,W)4X42*21**	33600	TDR&TXV	16			13	MV12F19**B*
	EN(A,D,W)4X42*21**	33600	TDR&TXV	16			13	MV16J22**B*
	EN(A,D,W)4X42*21**	33000	TDR&TXV	14.5			11.7	*9MPV050
	EN(A,D,W)4X42*21**	33200	TDR&TXV	14.5			12	*9MPV075
	EN(A,D,W)4X42*21**	33600	TDR&TXV	15.2			12.2	*9MPV100
	EN(A,D,W)4X42*21**	33000	TDR&TXV	14.5			12	*9MVX040
	EN(A,D,W)4X42*21**	33400	TDR&TXV	14.5			12	*9MVX060
	EN(A,D,W)4X42*21**	33800	TDR&TXV	15			12.5	*9MVX080
	EN(A,D,W)4X42*21**	33400	TDR&TXV	15			12.2	OLV112A16A
	EN(A,D,W)4X42*21**	33400	TXV			14	11.5	
	EN(A,D,W)4X48*21**	33600	TDR&TXV	16			13	*8MV*0901716**
	EN(A,D,W)4X48*21**	33800	TDR&TXV	16			13	*8MV*1102120**
	EN(A,D,W)4X48*21**	33800	TDR&TXV	15			12.5	*8MX*0701716**
EN(A,D,W)4X48*21**	34000	TDR&TXV	16			13	*8MX*0902116**	
EN(A,D,W)4X48*21**	34200	TDR&TXV	16			13	*8MX*1102120**	
EN(A,D,W)4X48*21**	33200	TDR&TXV	15.5			12.5	*9MA*0601714A**	
EN(A,D,W)4X48*21**	33400	TDR&TXV	16			12.5	*9MA*0801714A**	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	EN(A,D,W)4X48*21**	33600	TDR&TXV	16			13	*9MA*1002120A**
	EN(A,D,W)4X48*21**	33800	TDR&TXV	15.2			12.5	*9MV*0601714A**
	EN(A,D,W)4X48*21**	33800	TDR&TXV	15.5			12.5	*9MV*0801716A**
	EN(A,D,W)4X48*21**	34000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EN(A,D,W)4X48*21**	33800	TDR&TXV	15.5			12.5	*9MX*0601714A**
	EN(A,D,W)4X48*21**	33600	TDR&TXV	15.5			12.5	*9MX*0801716A**
	EN(A,D,W)4X48*21**	34000	TXV			14.2	11.7	
	END4X42*17**	33400	TDR&TXV	15			12.5	*8MV*0701412**
	END4X42*17**	33400	TDR&TXV	15.5			12.5	*8MV*0901716**
	END4X42*17**	33400	TDR&TXV	14.5			12	*8MX*0451408**
	END4X42*17**	33400	TDR&TXV	15			12	*8MX*0701716**
	END4X42*17**	33000	TDR&TXV	15			12.5	*9MA*0601714A**
	END4X42*17**	33200	TDR&TXV	15.5			12.5	*9MA*0801714A**
	END4X42*17**	33400	TDR&TXV	15.2			12	*9MV*0601714A**
	END4X42*17**	33400	TDR&TXV	15.5			12.5	*9MV*0801716A**
	END4X42*17**	33400	TDR&TXV	15.2			12.2	*9MX*0601714A**
	END4X42*17**	33200	TDR&TXV	15.5			12.5	*9MX*0801716A**
	END4X42*17**	33600	TDR&TXV	16			13	MV08B15**B*
	END4X42*17**	33800	TDR&TXV	16			13	MV12F19**B*
	END4X42*17**	33400	TDR&TXV	14.5			11.7	*9MPV050
	END4X42*17**	33400	TDR&TXV	14.5			12	*9MPV075
	END4X42*17**	33200	TDR&TXV	14.5			12	*9MVX040
	END4X42*17**	33600	TDR&TXV	15			12	*9MVX060
	END4X42*17**	33200	TDR&TXV	15			12	OLV098A12A
	END4X42*17**	33400	TDR&TXV	15			12	OMV098J12A
	END4X42*17**	33400	TDR&TXV	15.5			12.5	OMV112K14A
	END4X42*17**	33800	TXV			14	11.5	
	ENH4X36*17**	32800	TDR&TXV	15			12	*8MV*0701412**
	ENH4X36*17**	32800	TDR&TXV	15			12.5	*8MV*0901716**
	ENH4X36*17**	32800	TDR&TXV	15			12.5	*8MV*1102120**
	ENH4X36*17**	32800	TDR&TXV	15			12.5	*8MV*1352422**
	ENH4X36*17**	32800	TDR&TXV	14.5			11.7	*8MX*0451408**
	ENH4X36*17**	32800	TDR&TXV	14.5			12	*8MX*0701716**
	ENH4X36*17**	33000	TDR&TXV	15			12.5	*8MX*0902116**
	ENH4X36*17**	33000	TDR&TXV	15.5			12.5	*8MX*1102120**
	ENH4X36*17**	32400	TDR&TXV	15			12	*9MA*0601714A**
	ENH4X36*17**	32600	TDR&TXV	15.2			12	*9MA*0801714A**
	ENH4X36*17**	32600	TDR&TXV	15.2			12	*9MA*1002120A**
	ENH4X36*17**	32800	TDR&TXV	15.5			12.5	*9MA*1202422A**
	ENH4X36*17**	32600	TDR&TXV	15			12	*9MV*0601714A**
ENH4X36*17**	32800	TDR&TXV	15.2			12	*9MV*0801716A**	
ENH4X36*17**	32800	TDR&TXV	15.2			12	*9MV*1002116A**	
ENH4X36*17**	32800	TDR&TXV	15.5			12.5	*9MV*1202422A**	
ENH4X36*17**	32800	TDR&TXV	15			12	*9MX*0601714A**	
ENH4X36*17**	32600	TDR&TXV	15.2			12	*9MX*0801716A**	
ENH4X36*17**	33000	TDR&TXV	15.5			12.5	MV08B15**B*	
ENH4X36*17**	33200	TDR&TXV	15.5			12.7	MV12F19**B*	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	ENH4X36*17**	32600	TDR&TXV	14			11.7	*9MPV050
	ENH4X36*17**	32600	TDR&TXV	14.5			11.7	*9MPV075
	ENH4X36*17**	33200	TDR&TXV	15			12.2	*9MPV100
	ENH4X36*17**	33200	TDR&TXV	15.2			12.2	*9MPV125
	ENH4X36*17**	32600	TDR&TXV	14			11.5	*9MVX040
	ENH4X36*17**	32800	TDR&TXV	14.5			12	*9MVX060
	ENH4X36*17**	33200	TDR&TXV	14.5			12	*9MVX080
	ENH4X36*17**	33000	TDR&TXV	15			12	*9MVX100
	ENH4X36*17**	32600	TDR&TXV	14.5			12	OLV098A12A
	ENH4X36*17**	33000	TDR&TXV	14.5			12	OLV112A16A
	ENH4X36*17**	33600	TDR&TXV	15			12	OLV154F20A
	ENH4X36*17**	32800	TDR&TXV	14.5			12	OMV098J12A
	ENH4X36*17**	32800	TDR&TXV	15			12	OMV112K14A
	ENH4X36*17**	33000	TXV			14	11.5	
	ENH4X42*21**	33000	TDR&TXV	15			12	*8MV*0701412**
	ENH4X42*21**	33200	TDR&TXV	15.5			12.5	*8MV*0901716**
	ENH4X42*21**	33200	TDR&TXV	15.5			12.5	*8MV*1102120**
	ENH4X42*21**	33200	TDR&TXV	15.5			12.5	*8MV*1352422**
	ENH4X42*21**	33200	TDR&TXV	14.5			12	*8MX*0451408**
	ENH4X42*21**	33200	TDR&TXV	15			12	*8MX*0701716**
	ENH4X42*21**	33400	TDR&TXV	15.5			12.5	*8MX*0902116**
	ENH4X42*21**	33600	TDR&TXV	16			13	*8MX*1102120**
	ENH4X42*21**	32800	TDR&TXV	15.2			12	*9MA*0601714A**
	ENH4X42*21**	32800	TDR&TXV	15.5			12.5	*9MA*0801714A**
	ENH4X42*21**	33000	TDR&TXV	15.5			12.5	*9MA*1002120A**
	ENH4X42*21**	33000	TDR&TXV	15.5			12.5	*9MA*1202422A**
	ENH4X42*21**	33000	TDR&TXV	15			12	*9MV*0601714A**
	ENH4X42*21**	33200	TDR&TXV	15.5			12.5	*9MV*0801716A**
	ENH4X42*21**	33200	TDR&TXV	15.5			12.5	*9MV*1002116A**
	ENH4X42*21**	33200	TDR&TXV	15.5			12.5	*9MV*1202422A**
	ENH4X42*21**	33200	TDR&TXV	15.2			12	*9MX*0601714A**
	ENH4X42*21**	33000	TDR&TXV	15.5			12.5	*9MX*0801716A**
	ENH4X42*21**	33400	TDR&TXV	15.5			12.7	MV08B15**B*
	ENH4X42*21**	33600	TDR&TXV	16			13	MV12F19**B*
	ENH4X42*21**	33600	TDR&TXV	16			13	MV16J22**B*
	ENH4X42*21**	33600	TDR&TXV	16			13	MV20L24**B*
	ENH4X42*21**	33000	TDR&TXV	14.5			11.7	*9MPV050
	ENH4X42*21**	33200	TDR&TXV	14.5			12	*9MPV075
	ENH4X42*21**	33600	TDR&TXV	15.2			12.2	*9MPV100
	ENH4X42*21**	33600	TDR&TXV	15.5			12.5	*9MPV125
ENH4X42*21**	33000	TDR&TXV	14			11.5	*9MVX040	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA636GKA	ENH4X42*21**	33400	TDR&TXV	14.5			12	*9MVX060
	ENH4X42*21**	33800	TDR&TXV	15			12	*9MVX080
	ENH4X42*21**	33600	TDR&TXV	15			12.5	*9MVX100
	ENH4X42*21**	33000	TDR&TXV	14.5			12	OLV098A12A
	ENH4X42*21**	33400	TDR&TXV	15			12	OLV112A16A
	ENH4X42*21**	34000	TDR&TXV	15.5			12.5	OLV154F20A
	ENH4X42*21**	33000	TDR&TXV	14.5			12	OMV098J12A
	ENH4X42*21**	33200	TDR&TXV	15			12.5	OMV112K14A
	ENH4X42*21**	33400	TXV			14	11.5	
	ENH4X43*21**	34000	TDR&TXV	16			12.5	*8MV*0701412**
	ENH4X43*21**	34000	TDR&TXV	16			13	*8MV*0901716**
	ENH4X43*21**	34200	TDR&TXV	16			13	*8MV*1102120**
	ENH4X43*21**	34200	TDR&TXV	16			13	*8MV*1352422**
	ENH4X43*21**	34200	TDR&TXV	15			12	*8MX*0451408**
	ENH4X43*21**	34200	TDR&TXV	15.5			12.5	*8MX*0701716**
	ENH4X43*21**	34400	TDR&TXV	16			13	*8MX*0902116**
	ENH4X43*21**	34600	TDR&TXV	16			13	*8MX*1102120**
	ENH4X43*21**	33600	TDR&TXV	15.5			12.5	*9MA*0601714A**
	ENH4X43*21**	33800	TDR&TXV	16			13	*9MA*0801714A**
	ENH4X43*21**	34000	TDR&TXV	16			13	*9MA*1002120A**
	ENH4X43*21**	34000	TDR&TXV	16			13	*9MA*1202422A**
	ENH4X43*21**	33600	TDR&TXV	15.5			12.7	*9MV*0601714A**
	ENH4X43*21**	33800	TDR&TXV	16			13	*9MV*0801716A**
	ENH4X43*21**	33800	TDR&TXV	16			13	*9MV*1002116A**
	ENH4X43*21**	33800	TDR&TXV	16.5			13.2	*9MV*1202422A**
	ENH4X43*21**	34200	TDR&TXV	15.5			12.5	*9MX*0601714A**
	ENH4X43*21**	34000	TDR&TXV	16			13	*9MX*0801716A**
	ENH4X43*21**	34400	TDR&TXV	16			13.2	MV08B15**B*
	ENH4X43*21**	34400	TDR&TXV	16.5			13.2	MV12F19**B*
	ENH4X43*21**	34400	TDR&TXV	16.5			13.2	MV16J22**B*
	ENH4X43*21**	34400	TDR&TXV	16.5			13.2	MV20L24**B*
	ENH4X43*21**	34000	TDR&TXV	15			12.2	*9MPV050
	ENH4X43*21**	34200	TDR&TXV	15.2			12.2	*9MPV075
	ENH4X43*21**	34600	TDR&TXV	15.5			12.7	*9MPV100
	ENH4X43*21**	34800	TDR&TXV	16			13	*9MPV125
	ENH4X43*21**	34000	TDR&TXV	14.5			12	*9MVX040
	ENH4X43*21**	34400	TDR&TXV	15			12	*9MVX060
	ENH4X43*21**	34800	TDR&TXV	15.5			12.5	*9MVX080
	ENH4X43*21**	34600	TDR&TXV	16			13	*9MVX100
	ENH4X43*21**	33800	TDR&TXV	15.5			12.5	OLV098A12A
ENH4X43*21**	34200	TDR&TXV	15.5			12.5	OLV112A16A	
ENH4X43*21**	34400	TDR&TXV	16			13	OLV154F20A	
ENH4X43*21**	34000	TDR&TXV	15.5			12.5	OMV098J12A	
ENH4X43*21**	34200	TDR&TXV	16			13	OMV112K14A	
ENH4X43*21**	34400	TXV			14.5	12		

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA636GKA	ENH4X48*21**	33600	TDR&TXV	15.5			12.5	*8MV*0701412**
	ENH4X48*21**	33600	TDR&TXV	16			13	*8MV*0901716**
	ENH4X48*21**	33800	TDR&TXV	16			13	*8MV*1102120**
	ENH4X48*21**	33800	TDR&TXV	16			13	*8MV*1352422**
	ENH4X48*21**	33800	TDR&TXV	15			12	*8MX*0451408**
	ENH4X48*21**	33800	TDR&TXV	15			12.5	*8MX*0701716**
	ENH4X48*21**	34000	TDR&TXV	16			13	*8MX*0902116**
	ENH4X48*21**	34200	TDR&TXV	16			13	*8MX*1102120**
	ENH4X48*21**	33200	TDR&TXV	15.5			12.5	*9MA*0601714A**
	ENH4X48*21**	33400	TDR&TXV	15.7			12.5	*9MA*0801714A**
	ENH4X48*21**	33600	TDR&TXV	16			13	*9MA*1002120A**
	ENH4X48*21**	33600	TDR&TXV	16			13	*9MA*1202422A**
	ENH4X48*21**	33800	TDR&TXV	15.5			12.5	*9MV*0601714A**
	ENH4X48*21**	33800	TDR&TXV	15.5			12.5	*9MV*0801716A**
	ENH4X48*21**	34000	TDR&TXV	15.5			12.5	*9MV*1002116A**
	ENH4X48*21**	33800	TDR&TXV	16			13	*9MV*1202422A**
	ENH4X48*21**	33800	TDR&TXV	15.5			12.5	*9MX*0601714A**
	ENH4X48*21**	33600	TDR&TXV	15.5			12.7	*9MX*0801716A**
ENH4X48*21**	34000	TXV				14.2	11.7	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.
 † For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	*EN(A,D)4X43*24**	42000	TXV			14.5	12	
	FCM4X36****	40000	TDR&TXV	15.5			13	
	FCM4X48****	41500	TDR&TXV	16			13	
	FCM4X60****	42000	TDR&TXV	16			13.5	
	FEM4P42**A*	41500	TDR		15		12.5	
	FEM4P48**A*	41500	TDR		15		12.7	
	FEM4X42****	41500	TDR&TXV	15			12.5	
	FEM4X48****	42000	TDR&TXV	15.5			13	
	FEM4X60**B*	42000	TDR&TXV	15.5			13	
	FS(M,U)4P42**A*	41000	TDR		14.5		12.5	
	FS(M,U)4P48**A*	42000	TDR		14.5		12.5	
	FVM4X36****	40000	TDR&TXV	15.5			13	
	FVM4X48****	41500	TDR&TXV	16			13.5	
	FVM4X60****	42000	TDR&TXV	16			13.7	
	EA*4X42*21A*	40000	TDR&TXV	15.2			12.5	*8MV*0901716**
	EA*4X42*21A*	40000	TDR&TXV	15.5			13	*8MV*1102120**
	EA*4X42*21A*	40000	TDR&TXV	14.5			12	*8MX*0701716**
	EA*4X42*21A*	40500	TDR&TXV	15.5			13	*8MX*0902116**
	EA*4X42*21A*	40500	TDR&TXV	15.5			13	*8MX*1102120**
	EA*4X42*21A*	39500	TDR&TXV	14.5			12.2	*9MA*0601714A**
	EA*4X42*21A*	39500	TDR&TXV	15			12.5	*9MA*0801714A**
	EA*4X42*21A*	40000	TDR&TXV	15.2			12.5	*9MA*1002120A**
	EA*4X42*21A*	40000	TDR&TXV	14.5			12	*9MV*0601714A**
	EA*4X42*21A*	40000	TDR&TXV	15			12.5	*9MV*0801716A**
	EA*4X42*21A*	40000	TDR&TXV	15			12.5	*9MV*1002116A**
	EA*4X42*21A*	40000	TDR&TXV	14.5			12	*9MX*0601714A**
	EA*4X42*21A*	40000	TDR&TXV	15			12.2	*9MX*0801716A**
	EA*4X42*21A*	40000	TDR&TXV	15			12.5	*9MX*1002116A**
	EA*4X42*21A*	40500	TDR&TXV	16			13.2	MV12F19**B*
	EA*4X42*21A*	40500	TDR&TXV	16			13.2	MV16J22**B*
	EA*4X42*21A*	40000	TDR&TXV	14.5			12	*9MPV075
	EA*4X42*21A*	40500	TDR&TXV	15			12.5	*9MPV100
	EA*4X42*21A*	40000	TDR&TXV	14.5			12	OLV112A16A
	EA*4X42*21A*	40500	TXV			14	11.5	
	EA*4X42*24A*	40000	TDR&TXV	15.5			13	*8MV*1102120**
	EA*4X42*24A*	40500	TDR&TXV	15.5			13	*8MV*1352422**
	EA*4X42*24A*	40500	TDR&TXV	15.5			13	*8MX*0902116**
	EA*4X42*24A*	40500	TDR&TXV	15.5			13	*8MX*1102120**
	EA*4X42*24A*	40500	TDR&TXV	15.5			13	*8MX*1352420**
	EA*4X42*24A*	40000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EA*4X42*24A*	40000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EA*4X42*24A*	40500	TDR&TXV	15			12.5	*9MV*1002116A**
	EA*4X42*24A*	40000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EA*4X42*24A*	40000	TDR&TXV	15			12.5	*9MX*1002116A**
	EA*4X42*24A*	40500	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EA*4X42*24A*	40500	TDR&TXV	16			13.2	MV16J22**B*

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	EA*4X42*24A*	40500	TDR&TXV	16			13.2	MV20L24**B*
	EA*4X42*24A*	40500	TDR&TXV	15			12.5	*9MPV100
	EA*4X42*24A*	40500	TDR&TXV	15.2			12.7	*9MPV125
	EA*4X42*24A*	40500	TDR&TXV	15			12.5	*9MVX100
	EA*4X42*24A*	40500	TXV			14	11.5	
	EA*4X48*17A*	41000	TDR&TXV	15			12.5	*8MV*0701412**
	EA*4X48*17A*	41000	TDR&TXV	15.5			13	*8MV*0901716**
	EA*4X48*17A*	41000	TDR&TXV	14.5			12	*8MX*0701716**
	EA*4X48*17A*	40500	TDR&TXV	15			12.5	*9MA*0601714A**
	EA*4X48*17A*	40500	TDR&TXV	15.2			12.5	*9MA*0801714A**
	EA*4X48*17A*	40500	TDR&TXV	15			12.2	*9MV*0601714A**
	EA*4X48*17A*	41000	TDR&TXV	15.2			12.5	*9MV*0801716A**
	EA*4X48*17A*	41000	TDR&TXV	15			12.5	*9MX*0601714A**
	EA*4X48*17A*	41000	TDR&TXV	15			12.5	*9MX*0801716A**
	EA*4X48*17A*	41500	TDR&TXV	16			13.2	MV12F19**B*
	EA*4X48*17A*	41000	TDR&TXV	14.5			12.2	*9MPV075
	EA*4X48*17A*	41000	TDR&TXV	15			12.5	OMV112K14A
	EA*4X48*17A*	41500	TXV			14.5	12	
	EA*4X48*21A*	40500	TDR&TXV	15.5			13	*8MV*0901716**
	EA*4X48*21A*	41000	TDR&TXV	15.5			13	*8MV*1102120**
	EA*4X48*21A*	40500	TDR&TXV	14.5			12	*8MX*0701716**
	EA*4X48*21A*	41000	TDR&TXV	15.5			13	*8MX*0902116**
	EA*4X48*21A*	41000	TDR&TXV	16			13	*8MX*1102120**
	EA*4X48*21A*	40000	TDR&TXV	15			12.5	*9MA*0601714A**
	EA*4X48*21A*	40500	TDR&TXV	15.2			12.5	*9MA*0801714A**
	EA*4X48*21A*	40500	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EA*4X48*21A*	40500	TDR&TXV	14.5			12.2	*9MV*0601714A**
	EA*4X48*21A*	40500	TDR&TXV	15			12.5	*9MV*0801716A**
	EA*4X48*21A*	41000	TDR&TXV	15.2			12.5	*9MV*1002116A**
	EA*4X48*21A*	40500	TDR&TXV	15			12.5	*9MX*0601714A**
	EA*4X48*21A*	41000	TDR&TXV	15			12.5	*9MX*0801716A**
	EA*4X48*21A*	40500	TDR&TXV	15.2			12.7	*9MX*1002116A**
	EA*4X48*21A*	41000	TDR&TXV	16			13.2	MV12F19**B*
	EA*4X48*21A*	41000	TDR&TXV	16			13.2	MV16J22**B*
	EA*4X48*21A*	40500	TDR&TXV	14.5			12	*9MPV075
	EA*4X48*21A*	41000	TDR&TXV	15.2			12.7	*9MPV100
	EA*4X48*21A*	41000	TDR&TXV	14.5			12.5	OLV112A16A
	EA*4X48*21A*	41000	TXV			14.2	12	
	EA*4X48*24A*	41000	TDR&TXV	15.5			13	*8MV*1102120**
	EA*4X48*24A*	41000	TDR&TXV	16			13	*8MV*1352422**
EA*4X48*24A*	41000	TDR&TXV	15.5			13	*8MX*0902116**	
EA*4X48*24A*	41000	TDR&TXV	16			13	*8MX*1102120**	
EA*4X48*24A*	41000	TDR&TXV	15.5			13	*8MX*1352420**	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	EA*4X48*24A*	40500	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EA*4X48*24A*	40500	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EA*4X48*24A*	41000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	EA*4X48*24A*	41000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EA*4X48*24A*	40500	TDR&TXV	15.2			12.7	*9MX*1002116A**
	EA*4X48*24A*	41000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EA*4X48*24A*	41000	TDR&TXV	16			13.5	MV16J22**B*
	EA*4X48*24A*	41000	TDR&TXV	16			13.5	MV20L24**B*
	EA*4X48*24A*	41000	TDR&TXV	15.2			12.7	*9MPV100
	EA*4X48*24A*	41000	TDR&TXV	15.5			12.7	*9MPV125
	EA*4X48*24A*	41000	TDR&TXV	15.5			12.5	*9MVX100
	EA*4X48*24A*	41000	TXV			14.2	12	
	EA*4X60*21A*	41500	TDR&TXV	16			13	*8MV*0901716**
	EA*4X60*21A*	41500	TDR&TXV	16			13	*8MV*1102120**
	EA*4X60*21A*	41500	TDR&TXV	15			12.5	*8MX*0701716**
	EA*4X60*21A*	41500	TDR&TXV	16			13	*8MX*0902116**
	EA*4X60*21A*	41500	TDR&TXV	16			13	*8MX*1102120**
	EA*4X60*21A*	41000	TDR&TXV	15.2			12.5	*9MA*0601714A**
	EA*4X60*21A*	41000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EA*4X60*21A*	41000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EA*4X60*21A*	41000	TDR&TXV	15			12.5	*9MV*0601714A**
	EA*4X60*21A*	41000	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EA*4X60*21A*	41500	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EA*4X60*21A*	41500	TDR&TXV	15.2			12.5	*9MX*0601714A**
	EA*4X60*21A*	41500	TDR&TXV	15.2			12.7	*9MX*0801716A**
	EA*4X60*21A*	41500	TDR&TXV	15.5			12.7	*9MX*1002116A**
	EA*4X60*21A*	42000	TXV			14.5	12	
	EA*4X60*24A*	41500	TDR&TXV	16			13	*8MV*1102120**
	EA*4X60*24A*	41500	TDR&TXV	16			13	*8MV*1352422**
	EA*4X60*24A*	41500	TDR&TXV	16			13	*8MX*0902116**
	EA*4X60*24A*	41500	TDR&TXV	16			13	*8MX*1102120**
	EA*4X60*24A*	41500	TDR&TXV	16			13	*8MX*1352420**
	EA*4X60*24A*	41000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EA*4X60*24A*	41000	TDR&TXV	16			13	*9MA*1202422A**
	EA*4X60*24A*	41500	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EA*4X60*24A*	41500	TDR&TXV	16			13	*9MV*1202422A**
	EA*4X60*24A*	41500	TDR&TXV	15.5			12.7	*9MX*1002116A**
	EA*4X60*24A*	42000	TDR&TXV	16			13	*9MX*1202422A**
	EA*4X60*24A*	42000	TXV			14.5	12	
	ED*4X42F**	40000	TDR&TXV	15.2			12.7	*8MV*0901716**
	ED*4X42F**	40000	TDR&TXV	15.2			12.7	*8MV*1102120**
	ED*4X42F**	40000	TDR&TXV	14.5			12	*8MX*0701716**
	ED*4X42F**	40000	TDR&TXV	15.2			12.7	*8MX*0902116**
	ED*4X42F**	40500	TDR&TXV	15.5			12.7	*8MX*1102120**
	ED*4X42F**	39500	TDR&TXV	14.5			12.2	*9MA*0601714A**
	ED*4X42F**	39500	TDR&TXV	15			12.2	*9MA*0801714A**
	ED*4X42F**	40000	TDR&TXV	15			12.5	*9MA*1002120A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	ED*4X42F**	40000	TDR&TXV	14.5			12	*9MV*0601714A**
	ED*4X42F**	40000	TDR&TXV	14.5			12.2	*9MV*0801716A**
	ED*4X42F**	40000	TDR&TXV	15			12.5	*9MV*1002116A**
	ED*4X42F**	40000	TDR&TXV	14.5			12.2	*9MX*0601714A**
	ED*4X42F**	40000	TDR&TXV	14.5			12.2	*9MX*0801716A**
	ED*4X42F**	40000	TDR&TXV	15			12.5	*9MX*1002116A**
	ED*4X42F**	40500	TDR&TXV	15.5			13	MV12F19**B*
	ED*4X42F**	40000	TDR&TXV	14			12	*9MPV075
	ED*4X42F**	40000	TDR&TXV	14.5			12	*9MVX060
	ED*4X42F**	40000	TDR&TXV	14.5			12.2	OLV112A16A
	ED*4X42F**	40000	TDR&TXV	14.5			12.2	OMV112K14A
	ED*4X42F**	40500	TXV			14	11.7	
	ED*4X42J**	40000	TDR&TXV	15.2			12.7	*8MV*1102120**
	ED*4X42J**	40000	TDR&TXV	15.5			13	*8MV*1352422**
	ED*4X42J**	40500	TDR&TXV	15.2			12.7	*8MX*0902116**
	ED*4X42J**	40500	TDR&TXV	15.5			13	*8MX*1102120**
	ED*4X42J**	40500	TDR&TXV	15.5			12.7	*8MX*1352420**
	ED*4X42J**	40000	TDR&TXV	15			12.7	*9MA*1002120A**
	ED*4X42J**	40000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ED*4X42J**	40000	TDR&TXV	15			12.5	*9MV*1002116A**
	ED*4X42J**	40000	TDR&TXV	15.2			12.7	*9MV*1202422A**
	ED*4X42J**	40000	TDR&TXV	15			12.5	*9MX*1002116A**
	ED*4X42J**	40500	TDR&TXV	15.2			12.7	*9MX*1202422A**
	ED*4X42J**	40500	TDR&TXV	16			13.2	MV12F19**B*
	ED*4X42J**	40500	TDR&TXV	16			13.2	MV16J22**B*
	ED*4X42J**	40500	TDR&TXV	16			13.2	MV20L24**B*
	ED*4X42J**	40000	TDR&TXV	14			12	*9MPV075
	ED*4X42J**	40500	TDR&TXV	15			12.5	*9MPV100
	ED*4X42J**	40500	TDR&TXV	15.2			12.7	*9MPV125
	ED*4X42J**	40000	TDR&TXV	14.5			12	*9MVX060
	ED*4X42J**	40500	TDR&TXV	15			12.5	*9MVX080
	ED*4X42J**	40500	TDR&TXV	15.2			12.7	*9MVX100
	ED*4X42J**	40000	TDR&TXV	14.5			12.2	OLV112A16A
	ED*4X42J**	40500	TXV			14	11.7	
	ED*4X42L**	40000	TDR&TXV	15.5			12.7	*8MV*1102120**
	ED*4X42L**	40500	TDR&TXV	15.5			13	*8MV*1352422**
	ED*4X42L**	40500	TDR&TXV	15.5			12.7	*8MX*0902116**
	ED*4X42L**	40500	TDR&TXV	15.5			13	*8MX*1102120**
	ED*4X42L**	40500	TDR&TXV	15.5			12.7	*8MX*1352420**
	ED*4X42L**	40000	TDR&TXV	15.2			12.7	*9MA*1002120A**
	ED*4X42L**	40000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ED*4X42L**	40500	TDR&TXV	15			12.5	*9MV*1002116A**
	ED*4X42L**	40000	TDR&TXV	15.2			12.7	*9MV*1202422A**
	ED*4X42L**	40000	TDR&TXV	15			12.5	*9MX*1002116A**
	ED*4X42L**	40500	TDR&TXV	15.2			12.7	*9MX*1202422A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor EER blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	ED*4X42L**	40500	TDR&TXV	16			13.2	MV16J22**B*
	ED*4X42L**	40500	TDR&TXV	16			13.2	MV20L24**B*
	ED*4X42L**	40500	TDR&TXV	15			12.5	*9MPV100
	ED*4X42L**	40500	TDR&TXV	15.2			12.7	*9MPV125
	ED*4X42L**	40500	TDR&TXV	15			12.5	*9MVX080
	ED*4X42L**	40500	TDR&TXV	15.2			12.7	*9MVX100
	ED*4X42L**	40500	TDR&TXV	14.5			12.2	OLV112A16A
	ED*4X42L**	41000	TDR&TXV	15			12.7	OLV154F20A
	ED*4X42L**	40500	TXV			14	11.7	
	ED*4X48F**	41000	TDR&TXV	15.5			13	*8MV*0901716**
	ED*4X48F**	41000	TDR&TXV	15.5			13	*8MV*1102120**
	ED*4X48F**	41000	TDR&TXV	14.5			12.2	*8MX*0701716**
	ED*4X48F**	41000	TDR&TXV	15.5			13	*8MX*0902116**
	ED*4X48F**	41000	TDR&TXV	16			13.2	*8MX*1102120**
	ED*4X48F**	40500	TDR&TXV	14.5			12.5	*9MA*0601714A**
	ED*4X48F**	40500	TDR&TXV	15			12.7	*9MA*0801714A**
	ED*4X48F**	40500	TDR&TXV	15.2			12.7	*9MA*1002120A**
	ED*4X48F**	40500	TDR&TXV	14.5			12.2	*9MV*0601714A**
	ED*4X48F**	41000	TDR&TXV	15			12.5	*9MV*0801716A**
	ED*4X48F**	41000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	ED*4X48F**	41000	TDR&TXV	14.5			12.5	*9MX*0601714A**
	ED*4X48F**	41000	TDR&TXV	15			12.5	*9MX*0801716A**
	ED*4X48F**	41000	TDR&TXV	15.2			12.7	*9MX*1002116A**
	ED*4X48F**	41500	TDR&TXV	16			13.2	MV12F19**B*
	ED*4X48F**	41000	TDR&TXV	14.5			12.2	*9MPV075
	ED*4X48F**	41000	TDR&TXV	14.5			12.2	*9MVX060
	ED*4X48F**	41000	TDR&TXV	14.5			12.2	OLV112A16A
	ED*4X48F**	41000	TDR&TXV	15			12.5	OMV112K14A
	ED*4X48F**	41500	TXV			14.5	12	
	ED*4X48J**	40500	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ED*4X48J**	40500	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ED*4X48J**	41000	TDR&TXV	15.2			12.5	*9MV*1002116A**
	ED*4X48J**	40500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ED*4X48J**	40500	TDR&TXV	15.2			12.7	*9MX*1002116A**
	ED*4X48J**	41000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	ED*4X48J**	41000	TDR&TXV	16			13.2	MV12F19**B*
	ED*4X48J**	41000	TDR&TXV	16			13.2	MV16J22**B*
	ED*4X48J**	41000	TDR&TXV	16			13.2	MV20L24**B*
	ED*4X48J**	40500	TDR&TXV	14.5			12	*9MPV075
	ED*4X48J**	41000	TDR&TXV	15.2			12.7	*9MPV100
	ED*4X48J**	41000	TDR&TXV	15.5			12.7	*9MPV125
	ED*4X48J**	41000	TDR&TXV	15			12.5	*9MVX080
	ED*4X48J**	41000	TXV			14.2	12	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	ED*4X48L**	41000	TDR&TXV	15.5			13	*8MV*1102120**
	ED*4X48L**	41000	TDR&TXV	16			13.2	*8MV*1352422**
	ED*4X48L**	41000	TDR&TXV	15.5			13	*8MX*0902116**
	ED*4X48L**	41000	TDR&TXV	16			13.2	*8MX*1102120**
	ED*4X48L**	41000	TDR&TXV	15.5			13	*8MX*1352420**
	ED*4X48L**	40500	TDR&TXV	15.2			12.7	*9MA*1002120A**
	ED*4X48L**	40500	TDR&TXV	15.5			13	*9MA*1202422A**
	ED*4X48L**	41000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	ED*4X48L**	41000	TDR&TXV	15.5			13	*9MV*1202422A**
	ED*4X48L**	40500	TDR&TXV	15.2			12.7	*9MX*1002116A**
	ED*4X48L**	41000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	ED*4X48L**	41000	TDR&TXV	16			13.5	MV16J22**B*
	ED*4X48L**	41000	TDR&TXV	16			13.5	MV20L24**B*
	ED*4X48L**	41000	TDR&TXV	15.2			12.7	*9MPV100
	ED*4X48L**	41000	TDR&TXV	15.5			12.7	*9MPV125
	ED*4X48L**	41000	TDR&TXV	15.2			12.7	*9MVX080
	ED*4X48L**	41000	TDR&TXV	15.5			12.7	*9MVX100
	ED*4X48L**	41000	TDR&TXV	14.5			12.5	OLV112A16A
	ED*4X48L**	41500	TDR&TXV	15.2			12.7	OLV154F20A
	ED*4X48L**	41000	TXV			14	12	
	ED*4X60L**	41000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ED*4X60L**	41000	TDR&TXV	16			13	*9MA*1202422A**
	ED*4X60L**	41500	TDR&TXV	15.5			12.7	*9MV*1002116A**
	ED*4X60L**	41500	TDR&TXV	16			13	*9MV*1202422A**
	ED*4X60L**	41500	TDR&TXV	15.5			12.7	*9MX*1002116A**
	ED*4X60L**	42000	TDR&TXV	16			13	*9MX*1202422A**
	ED*4X60L**	42000	TDR&TXV	15.5			13	*9MVX080
	ED*4X60L**	41500	TDR&TXV	15.5			13	*9MVX100
	ED*4X60L**	42000	TXV			14.5	12	
	EHD4X42A**	41000	TDR&TXV	15			12.5	*8MV*0701412**
	EHD4X42A**	41000	TDR&TXV	15.5			13	*8MV*0901716**
	EHD4X42A**	41000	TDR&TXV	15.5			13	*8MV*1102120**
	EHD4X42A**	41000	TDR&TXV	16			13	*8MV*1352422**
	EHD4X42A**	41000	TDR&TXV	14.5			12	*8MX*0701716**
	EHD4X42A**	41000	TDR&TXV	15.5			13	*8MX*0902116**
	EHD4X42A**	41000	TDR&TXV	16			13	*8MX*1102120**
	EHD4X42A**	41000	TDR&TXV	15.5			13	*8MX*1352420**
	EHD4X42A**	40500	TDR&TXV	15			12.5	*9MA*0601714A**
	EHD4X42A**	40500	TDR&TXV	15.2			12.7	*9MA*0801714A**
	EHD4X42A**	40500	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EHD4X42A**	41000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EHD4X42A**	40500	TDR&TXV	15			12.2	*9MV*0601714A**
	EHD4X42A**	41000	TDR&TXV	15.2			12.5	*9MV*0801716A**
	EHD4X42A**	41000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	EHD4X42A**	41000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EHD4X42A**	41000	TDR&TXV	15			12.5	*9MX*0601714A**
	EHD4X42A**	41000	TDR&TXV	15.2			12.5	*9MX*0801716A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	EHD4X42A**	41000	TDR&TXV	15.2			12.7	*9MX*1002116A**
	EHD4X42A**	41500	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EHD4X42A**	41500	TDR&TXV	16			13.2	MV12F19**B*
	EHD4X42A**	41500	TDR&TXV	16			13.5	MV16J22**B*
	EHD4X42A**	41500	TDR&TXV	16			13.5	MV20L24**B*
	EHD4X42A**	41000	TDR&TXV	14.5			12.2	*9MPV075
	EHD4X42A**	41500	TDR&TXV	15.2			12.7	*9MPV100
	EHD4X42A**	41500	TDR&TXV	15.5			13	*9MPV125
	EHD4X42A**	41000	TDR&TXV	14.5			12	*9MVX060
	EHD4X42A**	41500	TDR&TXV	15			12.5	*9MVX080
	EHD4X42A**	41000	TDR&TXV	15.5			13	*9MVX100
	EHD4X42A**	41000	TDR&TXV	15			12.5	OLV112A16A
	EHD4X42A**	42000	TDR&TXV	15			12.7	OLV154F20A
	EHD4X42A**	41000	TDR&TXV	15			12.5	OMV112K14A
	EHD4X42A**	41500	TXV			14.5	12	
	EHD4X48A**	41000	TDR&TXV	15			12.5	*8MV*0701412**
	EHD4X48A**	41000	TDR&TXV	15.5			13	*8MV*0901716**
	EHD4X48A**	41000	TDR&TXV	15.5			13	*8MV*1102120**
	EHD4X48A**	41500	TDR&TXV	16			13	*8MV*1352422**
	EHD4X48A**	41000	TDR&TXV	14.5			12.5	*8MX*0701716**
	EHD4X48A**	41500	TDR&TXV	16			13	*8MX*0902116**
	EHD4X48A**	41500	TDR&TXV	16			13	*8MX*1102120**
	EHD4X48A**	41500	TDR&TXV	16			13	*8MX*1352420**
	EHD4X48A**	40500	TDR&TXV	15			12.5	*9MA*0601714A**
	EHD4X48A**	40500	TDR&TXV	15.2			12.7	*9MA*0801714A**
	EHD4X48A**	41000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EHD4X48A**	41000	TDR&TXV	15.5			13	*9MA*1202422A**
	EHD4X48A**	41000	TDR&TXV	15			12.5	*9MV*0601714A**
	EHD4X48A**	41000	TDR&TXV	15.2			12.5	*9MV*0801716A**
	EHD4X48A**	41000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	EHD4X48A**	41000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EHD4X48A**	41000	TDR&TXV	15			12.5	*9MX*0601714A**
	EHD4X48A**	41000	TDR&TXV	15.2			12.5	*9MX*0801716A**
	EHD4X48A**	41000	TDR&TXV	15.5			12.7	*9MX*1002116A**
	EHD4X48A**	41500	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EHD4X48A**	41500	TDR&TXV	16			13.2	MV12F19**B*
	EHD4X48A**	41500	TDR&TXV	16			13.5	MV16J22**B*
	EHD4X48A**	41500	TDR&TXV	16			13.5	MV20L24**B*
	EHD4X48A**	41000	TDR&TXV	14.5			12.2	*9MPV075
	EHD4X48A**	41500	TDR&TXV	15.2			12.7	*9MPV100
EHD4X48A**	41500	TDR&TXV	15.5			13	*9MPV125	
EHD4X48A**	41000	TDR&TXV	14.5			12	*9MVX060	
EHD4X48A**	41500	TDR&TXV	15			12.5	*9MVX080	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	EHD4X48A**	41500	TDR&TXV	15.5			13	*9MVX100
	EHD4X48A**	41500	TDR&TXV	15			12.5	OLV112A16A
	EHD4X48A**	42000	TDR&TXV	15.5			13	OLV154F20A
	EHD4X48A**	41000	TDR&TXV	15			12.5	OMV112K14A
	EHD4X48A**	41500	TXV			14.5	12	
	EHD4X60A**	41500	TDR&TXV	15.5			13	*8MV*0701412**
	EHD4X60A**	41500	TDR&TXV	16			13	*8MV*0901716**
	EHD4X60A**	41500	TDR&TXV	16			13	*8MV*1102120**
	EHD4X60A**	41500	TDR&TXV	16			13	*8MV*1352422**
	EHD4X60A**	41500	TDR&TXV	15			12.5	*8MX*0701716**
	EHD4X60A**	42000	TDR&TXV	16			13	*8MX*0902116**
	EHD4X60A**	42000	TDR&TXV	16			13	*8MX*1102120**
	EHD4X60A**	42000	TDR&TXV	16			13	*8MX*1352420**
	EHD4X60A**	41000	TDR&TXV	15.2			12.7	*9MA*0601714A**
	EHD4X60A**	41000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EHD4X60A**	41500	TDR&TXV	16			13	*9MA*1002120A**
	EHD4X60A**	41500	TDR&TXV	16			13	*9MA*1202422A**
	EHD4X60A**	41500	TDR&TXV	15.2			12.5	*9MV*0601714A**
	EHD4X60A**	41500	TDR&TXV	15.5			12.7	*9MV*0801716A**
	EHD4X60A**	42000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EHD4X60A**	42000	TDR&TXV	16			13	*9MV*1202422A**
	EHD4X60A**	41500	TDR&TXV	15.2			12.5	*9MX*0601714A**
	EHD4X60A**	42000	TDR&TXV	15.5			12.7	*9MX*0801716A**
	EHD4X60A**	41500	TDR&TXV	15.5			12.7	*9MX*1002116A**
	EHD4X60A**	42000	TDR&TXV	16			13	*9MX*1202422A**
	EHD4X60A**	42000	TXV			14.5	12	
	EN(A,D)4X43*24**	41500	TDR&TXV	16			13	*8MV*1102120**
	EN(A,D)4X43*24**	41500	TDR&TXV	16			13	*8MV*1352422**
	EN(A,D)4X43*24**	41500	TDR&TXV	16			13	*8MX*0902116**
	EN(A,D)4X43*24**	42000	TDR&TXV	16			13	*8MX*1102120**
	EN(A,D)4X43*24**	42000	TDR&TXV	16			13	*8MX*1352420**
	EN(A,D)4X43*24**	41000	TDR&TXV	16			13	*9MA*1002120A**
	EN(A,D)4X43*24**	41000	TDR&TXV	16			13	*9MA*1202422A**
	EN(A,D)4X43*24**	41000	TDR&TXV	15.5			13	*9MV*1002116A**
	EN(A,D)4X43*24**	41000	TDR&TXV	16			13	*9MV*1202422A**
	EN(A,D)4X43*24**	41500	TDR&TXV	15.5			12.7	*9MX*1002116A**
	EN(A,D)4X43*24**	42000	TDR&TXV	16			13	*9MX*1202422A**
	EN(A,D)4X43*24**	42000	TDR&TXV	16.5			13.7	MV16J22**B*
	EN(A,D)4X43*24**	42000	TDR&TXV	16.5			13.7	MV20L24**B*
	EN(A,D)4X43*24**	42000	TDR&TXV	15.5			13	*9MPV100
	EN(A,D)4X43*24**	42000	TDR&TXV	16			13.2	*9MPV125
	EN(A,D)4X43*24**	42000	TDR&TXV	15.5			13	*9MVX080
	EN(A,D)4X43*24**	41500	TDR&TXV	16			13	*9MVX100
	EN(A,D)4X48*24**	41000	TDR&TXV	16			13	*8MV*1102120**
	EN(A,D)4X48*24**	41000	TDR&TXV	16			13	*8MV*1352422**
	EN(A,D)4X48*24**	41000	TDR&TXV	15.5			13	*8MX*0902116**
	EN(A,D)4X48*24**	41000	TDR&TXV	16			13	*8MX*1102120**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	EN(A,D)4X48*24**	41000	TDR&TXV	16			13	*8MX*1352420**
	EN(A,D)4X48*24**	40500	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EN(A,D)4X48*24**	40500	TDR&TXV	16			13	*9MA*1202422A**
	EN(A,D)4X48*24**	41000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	EN(A,D)4X48*24**	41000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EN(A,D)4X48*24**	41000	TDR&TXV	15.5			12.7	*9MX*1002116A**
	EN(A,D)4X48*24**	41500	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EN(A,D)4X48*24**	41500	TDR&TXV	16			13.5	MV16J22**B*
	EN(A,D)4X48*24**	41500	TDR&TXV	16			13.5	MV20L24**B*
	EN(A,D)4X48*24**	41500	TDR&TXV	15.2			12.7	*9MPV100
	EN(A,D)4X48*24**	41500	TDR&TXV	15.5			13	*9MPV125
	EN(A,D)4X48*24**	41500	TDR&TXV	15			12.7	*9MVX080
	EN(A,D)4X48*24**	41000	TDR&TXV	15.5			12.5	*9MVX100
	EN(A,D)4X48*24**	41000	TXV			14.2	12	
	EN(A,D,W)4X42*21**	40000	TDR&TXV	15			12.5	*8MV*0901716**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	15			12.5	*8MV*1102120**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	14.5			12	*8MX*0701716**
	EN(A,D,W)4X42*21**	40500	TDR&TXV	15			12.5	*8MX*0902116**
	EN(A,D,W)4X42*21**	40500	TDR&TXV	15.5			13	*8MX*1102120**
	EN(A,D,W)4X42*21**	39500	TDR&TXV	14.5			12	*9MA*0601714A**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	15			12.5	*9MA*0801714A**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	15.2			12.5	*9MA*1002120A**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	14.5			12	*9MV*0601714A**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	15			12.5	*9MV*0801716A**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	15			12.5	*9MV*1002116A**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	14.5			12	*9MX*0601714A**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	15			12.2	*9MX*0801716A**
	EN(A,D,W)4X42*21**	40000	TDR&TXV	15			12.5	*9MX*1002116A**
	EN(A,D,W)4X42*21**	40500	TDR&TXV	15.5			13	MV12F19**B*
	EN(A,D,W)4X42*21**	40500	TDR&TXV	16			13.2	MV16J22**B*
	EN(A,D,W)4X42*21**	40500	TDR&TXV	15			12.5	*9MPV100
	EN(A,D,W)4X42*21**	40000	TDR&TXV	14.5			12	*9MVX060
	EN(A,D,W)4X42*21**	40500	TDR&TXV	15			12.5	*9MVX080
	EN(A,D,W)4X42*21**	40500	TDR&TXV	14.5			12	OLV112A16A
	EN(A,D,W)4X42*21**	40500	TXV			14	12	
	EN(A,D,W)4X48*21**	41000	TDR&TXV	15.5			13	*8MV*0901716**
	EN(A,D,W)4X48*21**	41000	TDR&TXV	16			13	*8MV*1102120**
	EN(A,D,W)4X48*21**	41000	TDR&TXV	14.5			12	*8MX*0701716**
	EN(A,D,W)4X48*21**	41000	TDR&TXV	15.5			13	*8MX*0902116**
	EN(A,D,W)4X48*21**	41000	TDR&TXV	16			13	*8MX*1102120**
	EN(A,D,W)4X48*21**	40500	TDR&TXV	15			12.5	*9MA*0601714A**
	EN(A,D,W)4X48*21**	40500	TDR&TXV	15.5			12.7	*9MA*0801714A**
	EN(A,D,W)4X48*21**	40500	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EN(A,D,W)4X48*21**	40500	TDR&TXV	14.5			12.2	*9MV*0601714A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA642GKA	EN(A,D,W)4X48*21**	40500	TDR&TXV	15.2			12.5	*9MV*0801716A**
	EN(A,D,W)4X48*21**	41000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	EN(A,D,W)4X48*21**	41000	TDR&TXV	15			12.5	*9MX*0601714A**
	EN(A,D,W)4X48*21**	41000	TDR&TXV	15.2			12.5	*9MX*0801716A**
	EN(A,D,W)4X48*21**	41000	TDR&TXV	15.5			12.7	*9MX*1002116A**
	EN(A,D,W)4X48*21**	41000	TDR&TXV	16			13.2	MV12F19**B*
	EN(A,D,W)4X48*21**	41500	TDR&TXV	16			13.5	MV16J22**B*
	EN(A,D,W)4X48*21**	41000	TDR&TXV	14.5			12.2	*9MPV075
	EN(A,D,W)4X48*21**	41500	TDR&TXV	15.2			12.7	*9MPV100
	EN(A,D,W)4X48*21**	41000	TDR&TXV	14.5			12	*9MVX060
	EN(A,D,W)4X48*21**	41500	TDR&TXV	15			12.7	*9MVX080
	EN(A,D,W)4X48*21**	41000	TDR&TXV	15			12.5	OLV112A16A
	EN(A,D,W)4X48*21**	41000	TXV			14.2	12	
	EN(A,D,W)4X60*24**	41500	TDR&TXV	16			13	*8MV*1102120**
	EN(A,D,W)4X60*24**	41500	TDR&TXV	16			13	*8MV*1352422**
	EN(A,D,W)4X60*24**	41500	TDR&TXV	16			13	*8MX*0902116**
	EN(A,D,W)4X60*24**	42000	TDR&TXV	16			13	*8MX*1102120**
	EN(A,D,W)4X60*24**	42000	TDR&TXV	16			13	*8MX*1352420**
	EN(A,D,W)4X60*24**	41000	TDR&TXV	15.7			13	*9MA*1002120A**
	EN(A,D,W)4X60*24**	41000	TDR&TXV	16			13	*9MA*1202422A**
	EN(A,D,W)4X60*24**	41500	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EN(A,D,W)4X60*24**	41500	TDR&TXV	16			13	*9MV*1202422A**
	EN(A,D,W)4X60*24**	41500	TDR&TXV	15.5			12.7	*9MX*1002116A**
	EN(A,D,W)4X60*24**	42000	TDR&TXV	16			13	*9MX*1202422A**
	EN(A,D,W)4X60*24**	41500	TXV			14.5	12	
	END4X42*17**	40500	TDR&TXV	15			12.5	*8MV*0701412**
	END4X42*17**	40500	TDR&TXV	15.2			12.5	*8MV*0901716**
	END4X42*17**	40500	TDR&TXV	14.5			12	*8MX*0701716**
	END4X42*17**	40000	TDR&TXV	14.5			12.5	*9MA*0601714A**
	END4X42*17**	40000	TDR&TXV	15			12.5	*9MA*0801714A**
	END4X42*17**	40000	TDR&TXV	14.5			12	*9MV*0601714A**
	END4X42*17**	40500	TDR&TXV	15			12.5	*9MV*0801716A**
	END4X42*17**	40500	TDR&TXV	14.5			12.2	*9MX*0601714A**
	END4X42*17**	40500	TDR&TXV	15			12.5	*9MX*0801716A**
	END4X42*17**	41000	TDR&TXV	15.5			13	MV12F19**B*
	END4X42*17**	40500	TDR&TXV	14.5			12	*9MVX060
	END4X42*17**	40500	TDR&TXV	14.5			12.5	OMV112K14A
	END4X42*17**	41000	TXV			14	12	
	ENH4X42*21**	40000	TDR&TXV	14.5			12.5	*8MV*0701412**
	ENH4X42*21**	40000	TDR&TXV	15			12.5	*8MV*0901716**
	ENH4X42*21**	40000	TDR&TXV	15			12.5	*8MV*1102120**
	ENH4X42*21**	40500	TDR&TXV	15.5			13	*8MV*1352422**
ENH4X42*21**	40000	TDR&TXV	14.5			12	*8MX*0701716**	
ENH4X42*21**	40500	TDR&TXV	15			12.5	*8MX*0902116**	
ENH4X42*21**	40500	TDR&TXV	15.5			13	*8MX*1102120**	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor EER blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	ENH4X42*21**	40000	TDR&TXV	15			12.5	*8MX*1352420**
	ENH4X42*21**	39500	TDR&TXV	14.5			12	*9MA*0601714A**
	ENH4X42*21**	40000	TDR&TXV	15			12.5	*9MA*0801714A**
	ENH4X42*21**	40000	TDR&TXV	15.2			12.5	*9MA*1002120A**
	ENH4X42*21**	40000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ENH4X42*21**	40000	TDR&TXV	14.5			12	*9MV*0601714A**
	ENH4X42*21**	40000	TDR&TXV	15			12.5	*9MV*0801716A**
	ENH4X42*21**	40000	TDR&TXV	15			12.5	*9MV*1002116A**
	ENH4X42*21**	40000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ENH4X42*21**	40000	TDR&TXV	14.5			12	*9MX*0601714A**
	ENH4X42*21**	40000	TDR&TXV	14.5			12.2	*9MX*0801716A**
	ENH4X42*21**	40000	TDR&TXV	15			12.5	*9MX*1002116A**
	ENH4X42*21**	40500	TDR&TXV	15.2			12.7	*9MX*1202422A**
	ENH4X42*21**	40500	TDR&TXV	15			12.5	*9MPV100
	ENH4X42*21**	40500	TDR&TXV	15.2			12.7	*9MPV125
	ENH4X42*21**	40000	TDR&TXV	14.5			12	*9MVX060
	ENH4X42*21**	40500	TDR&TXV	15			12	*9MVX080
	ENH4X42*21**	40500	TDR&TXV	15			12.5	*9MVX100
	ENH4X42*21**	40500	TDR&TXV	14.5			12	OLV112A16A
	ENH4X42*21**	41000	TDR&TXV	15			12.5	OLV154F20A
	ENH4X42*21**	40000	TDR&TXV	14.5			12.2	OMV112K14A
	ENH4X42*21**	40500	TXV			14	12	
	ENH4X43*21**	41000	TDR&TXV	15			12.5	*8MV*0701412**
	ENH4X43*21**	41500	TDR&TXV	16			13	*8MV*0901716**
	ENH4X43*21**	41500	TDR&TXV	16			13	*8MV*1102120**
	ENH4X43*21**	41500	TDR&TXV	16			13	*8MV*1352422**
	ENH4X43*21**	41500	TDR&TXV	15			12.5	*8MX*0701716**
	ENH4X43*21**	41500	TDR&TXV	16			13	*8MX*0902116**
	ENH4X43*21**	41500	TDR&TXV	16			13	*8MX*1102120**
	ENH4X43*21**	41500	TDR&TXV	16			13	*8MX*1352420**
	ENH4X43*21**	41000	TDR&TXV	15.2			12.5	*9MA*0601714A**
	ENH4X43*21**	41000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	ENH4X43*21**	41000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ENH4X43*21**	41000	TDR&TXV	16			13	*9MA*1202422A**
	ENH4X43*21**	41000	TDR&TXV	15			12.5	*9MV*0601714A**
	ENH4X43*21**	41000	TDR&TXV	15.2			12.7	*9MV*0801716A**
	ENH4X43*21**	41000	TDR&TXV	15.5			12.7	*9MV*1002116A**
	ENH4X43*21**	41000	TDR&TXV	16			13	*9MV*1202422A**
	ENH4X43*21**	41500	TDR&TXV	15			12.5	*9MX*0601714A**
	ENH4X43*21**	41500	TDR&TXV	15.2			12.7	*9MX*0801716A**
	ENH4X43*21**	41500	TDR&TXV	15.5			12.7	*9MX*1002116A**
	ENH4X43*21**	42000	TDR&TXV	15.5			13	*9MX*1202422A**
	ENH4X43*21**	42000	TDR&TXV	16			13.5	MV12F19**B*
	ENH4X43*21**	42000	TDR&TXV	16			13.5	MV16J22**B*
	ENH4X43*21**	42000	TDR&TXV	16			13.5	MV20L24**B*

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA642GKA	ENH4X43*21**	41500	TDR&TXV	14.5			12.2	*9MPV075
	ENH4X43*21**	42000	TDR&TXV	15.5			12.7	*9MPV100
	ENH4X43*21**	41500	TDR&TXV	15.5			13	*9MPV125
	ENH4X43*21**	41500	TDR&TXV	14.5			12	*9MVX060
	ENH4X43*21**	42000	TDR&TXV	15.5			12.5	*9MVX080
	ENH4X43*21**	41500	TDR&TXV	15.5			13	*9MVX100
	ENH4X43*21**	41500	TDR&TXV	15			12.5	OLV112A16A
	ENH4X43*21**	42500	TDR&TXV	15.5			13	OLV154F20A
	ENH4X43*21**	41500	TDR&TXV	15.5			13	OMV112K14A
	ENH4X43*21**	42000	TXV			14.5	12	
	ENH4X48*21**	40500	TDR&TXV	15			12.5	*8MV*0701412**
	ENH4X48*21**	41000	TDR&TXV	15.5			13	*8MV*0901716**
	ENH4X48*21**	41000	TDR&TXV	16			13	*8MV*1102120**
	ENH4X48*21**	41000	TDR&TXV	16			13	*8MV*1352422**
	ENH4X48*21**	41000	TDR&TXV	14.5			12	*8MX*0701716**
	ENH4X48*21**	41000	TDR&TXV	15.5			13	*8MX*0902116**
	ENH4X48*21**	41000	TDR&TXV	16			13	*8MX*1102120**
	ENH4X48*21**	41000	TDR&TXV	16			13	*8MX*1352420**
	ENH4X48*21**	40500	TDR&TXV	15			12.5	*9MA*0601714A**
	ENH4X48*21**	40500	TDR&TXV	15.2			12.7	*9MA*0801714A**
	ENH4X48*21**	40500	TDR&TXV	15.5			12.7	*9MA*1002120A**
	ENH4X48*21**	40500	TDR&TXV	16			13	*9MA*1202422A**
	ENH4X48*21**	40500	TDR&TXV	14.5			12.2	*9MV*0601714A**
	ENH4X48*21**	40500	TDR&TXV	15.2			12.5	*9MV*0801716A**
	ENH4X48*21**	41000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	ENH4X48*21**	41000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ENH4X48*21**	41000	TDR&TXV	15			12.5	*9MX*0601714A**
	ENH4X48*21**	41000	TDR&TXV	15.2			12.5	*9MX*0801716A**
	ENH4X48*21**	41000	TDR&TXV	15.5			12.7	*9MX*1002116A**
	ENH4X48*21**	41500	TDR&TXV	15.5			12.7	*9MX*1202422A**
	ENH4X48*21**	41000	TDR&TXV	16			13.2	MV12F19**B*
	ENH4X48*21**	41500	TDR&TXV	16			13.5	MV16J22**B*
	ENH4X48*21**	41500	TDR&TXV	16			13.5	MV20L24**B*
	ENH4X48*21**	41000	TDR&TXV	14.5			12.2	*9MPV075
	ENH4X48*21**	41500	TDR&TXV	15.2			12.7	*9MPV100
	ENH4X48*21**	41500	TDR&TXV	15.5			13	*9MPV125
	ENH4X48*21**	41000	TDR&TXV	14.5			12	*9MVX060
	ENH4X48*21**	41500	TDR&TXV	15			12.5	*9MVX080
	ENH4X48*21**	41000	TDR&TXV	15.5			12.5	*9MVX100
	ENH4X48*21**	41000	TDR&TXV	15			12.5	OLV112A16A
	ENH4X48*21**	42000	TDR&TXV	15.5			12.7	OLV154F20A
	ENH4X48*21**	41000	TDR&TXV	15			12.5	OMV112K14A
	ENH4X48*21**	41000	TXV			14.2	12	
	ENH4X60*24**	41000	TDR&TXV	15.5			12.5	*8MV*0701412**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA642GKA	ENH4X60*24**	41500	TDR&TXV	16			13	*8MV*0901716**
	ENH4X60*24**	41500	TDR&TXV	16			13	*8MV*1102120**
	ENH4X60*24**	41500	TDR&TXV	16			13	*8MV*1352422**
	ENH4X60*24**	41500	TDR&TXV	15			12	*8MX*0701716**
	ENH4X60*24**	41500	TDR&TXV	16			13	*8MX*0902116**
	ENH4X60*24**	42000	TDR&TXV	16			13	*8MX*1102120**
	ENH4X60*24**	42000	TDR&TXV	16			13	*8MX*1352420**
	ENH4X60*24**	41000	TDR&TXV	15.2			12.7	*9MA*0601714A**
	ENH4X60*24**	41000	TDR&TXV	15.5			12.7	*9MA*0801714A**
	ENH4X60*24**	41000	TDR&TXV	15.5			13	*9MA*1002120A**
	ENH4X60*24**	41000	TDR&TXV	16			13	*9MA*1202422A**
	ENH4X60*24**	41000	TDR&TXV	15			12.5	*9MV*0601714A**
	ENH4X60*24**	41500	TDR&TXV	15.5			12.7	*9MV*0801716A**
	ENH4X60*24**	41500	TDR&TXV	15.5			12.7	*9MV*1002116A**
	ENH4X60*24**	41500	TDR&TXV	16			13	*9MV*1202422A**
	ENH4X60*24**	41500	TDR&TXV	15.2			12.5	*9MX*0601714A**
	ENH4X60*24**	41500	TDR&TXV	15.5			12.7	*9MX*0801716A**
	ENH4X60*24**	41500	TDR&TXV	15.5			12.7	*9MX*1002116A**
	ENH4X60*24**	42000	TDR&TXV	16			13	*9MX*1202422A**
	ENH4X60*24**	41500	TXV		14.5		14.5	12
* Tested Combo								
2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.								
† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device								

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA648GKA	*EN(A,D)4X61*24**	46500	TXV			14.5	12.5	
	FCM4X48****	46000	TDR&TXV	16			13.5	
	FCM4X60****	46500	TDR&TXV	16			13.5	
	FEM4P48**A*	45000	TDR		14.5		12.5	
	FEM4X48****	46000	TDR&TXV	15.2			13	
	FEM4X60****	47000	TDR&TXV	16			13.5	
	FEM4X60**B*	46000	TDR&TXV	15.2			13	
	FS(M,U)4P48**A*	46000	TDR		14.5		12.5	
	FS(M,U)4X60**A*	46000	TDR&TXV	14.5			12	
	FVM4X48****	46000	TDR&TXV	16			13.5	
	FVM4X60****	46500	TDR&TXV	16			13.7	
	FXM4X48**A*	46500	TDR&TXV	16			13	
	FXM4X60**A*	47000	TDR&TXV	16			13.5	
	EA*4X48*17A*	45000	TDR&TXV	14.5			12.5	*8MV*0901716**
	EA*4X48*17A*	44500	TDR&TXV	14.5			12	*9MV*0801716A**
	EA*4X48*17A*	44500	TDR&TXV	14.5			12	*9MX*0801716A**
	EA*4X48*17A*	45000	TXV			14.2	12	
	EA*4X48*21A*	44500	TDR&TXV	14.5			12.5	*8MV*0901716**
	EA*4X48*21A*	44500	TDR&TXV	14.5			12.5	*8MV*1102120**
	EA*4X48*21A*	45000	TDR&TXV	15			12.5	*8MX*0902116**
	EA*4X48*21A*	45000	TDR&TXV	15.2			13	*8MX*1102120**
	EA*4X48*21A*	44500	TDR&TXV	14.5			12	*9MA*1002120A**
	EA*4X48*21A*	44500	TDR&TXV	14.5			12	*9MV*0801716A**
	EA*4X48*21A*	44500	TDR&TXV	14.5			12	*9MV*1002116A**
	EA*4X48*21A*	44500	TDR&TXV	14.5			12	*9MX*0801716A**
	EA*4X48*21A*	44500	TDR&TXV	14.5			12	*9MX*1002116A**
	EA*4X48*21A*	45000	TDR&TXV	15.5			13.2	MV16J22**B*
	EA*4X48*21A*	45000	TDR&TXV	14.5			12.5	*9MPV100
	EA*4X48*21A*	44500	TDR&TXV	14			12	OLV112A16A
	EA*4X48*21A*	45000	TXV			14	12	
	EA*4X48*24A*	44500	TDR&TXV	15			12.5	*8MV*1102120**
	EA*4X48*24A*	45000	TDR&TXV	15.2			13	*8MV*1352422**
	EA*4X48*24A*	45000	TDR&TXV	15			12.5	*8MX*0902116**
	EA*4X48*24A*	45000	TDR&TXV	15.2			13	*8MX*1102120**
	EA*4X48*24A*	45000	TDR&TXV	15.2			13	*8MX*1352420**
	EA*4X48*24A*	44500	TDR&TXV	14.5			12.5	*9MA*1002120A**
	EA*4X48*24A*	44500	TDR&TXV	15			12.5	*9MA*1202422A**
	EA*4X48*24A*	44500	TDR&TXV	14.5			12	*9MV*1002116A**
	EA*4X48*24A*	45000	TDR&TXV	15			12.5	*9MV*1202422A**
	EA*4X48*24A*	44500	TDR&TXV	14.5			12	*9MX*1002116A**
	EA*4X48*24A*	45000	TDR&TXV	15			12.5	*9MX*1202422A**
	EA*4X48*24A*	45000	TDR&TXV	16			13.2	MV16J22**B*
	EA*4X48*24A*	45000	TDR&TXV	16			13.2	MV20L24**B*
	EA*4X48*24A*	45000	TDR&TXV	14.5			12.5	*9MPV100
	EA*4X48*24A*	45000	TDR&TXV	14.5			12.7	*9MPV125

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor EER blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA648GKA	EA*4X48*24A*	45000	TDR&TXV	14.5			12.5	*9MVX080
	EA*4X48*24A*	45000	TDR&TXV	14.5			12.5	*9MVX100
	EA*4X48*24A*	45000	TXV			14	12	
	EA*4X60*21A*	45500	TDR&TXV	15.2			13	*8MV*0901716**
	EA*4X60*21A*	45500	TDR&TXV	15.5			13	*8MV*1102120**
	EA*4X60*21A*	46000	TDR&TXV	15.5			13	*8MX*0902116**
	EA*4X60*21A*	45500	TDR&TXV	16			13	*8MX*1102120**
	EA*4X60*21A*	45000	TDR&TXV	15.2			12.5	*9MA*1002120A**
	EA*4X60*21A*	45000	TDR&TXV	15			12.5	*9MV*0801716A**
	EA*4X60*21A*	45000	TDR&TXV	15.2			12.5	*9MV*1002116A**
	EA*4X60*21A*	45500	TDR&TXV	14.5			12	*9MX*0801716A**
	EA*4X60*21A*	45500	TDR&TXV	15			12.5	*9MX*1002116A**
	EA*4X60*21A*	46000	TDR&TXV	16			13.7	MV16J22**B*
	EA*4X60*21A*	46000	TDR&TXV	15			12.7	*9MPV100
	EA*4X60*21A*	45500	TDR&TXV	14.5			12.5	OLV112A16A
	EA*4X60*21A*	46000	TXV			14.5	12.5	
	EA*4X60*24A*	45500	TDR&TXV	15.5			13	*8MV*1102120**
	EA*4X60*24A*	45500	TDR&TXV	16			13	*8MV*1352422**
	EA*4X60*24A*	46000	TDR&TXV	15.5			13	*8MX*0902116**
	EA*4X60*24A*	46000	TDR&TXV	16			13	*8MX*1102120**
	EA*4X60*24A*	46000	TDR&TXV	15.5			13	*8MX*1352420**
	EA*4X60*24A*	45000	TDR&TXV	15.2			12.5	*9MA*1002120A**
	EA*4X60*24A*	45500	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EA*4X60*24A*	45000	TDR&TXV	15.2			12.5	*9MV*1002116A**
	EA*4X60*24A*	45500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EA*4X60*24A*	45500	TDR&TXV	15			12.5	*9MX*1002116A**
	EA*4X60*24A*	46000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EA*4X60*24A*	46000	TDR&TXV	16			13.7	MV16J22**B*
	EA*4X60*24A*	46000	TDR&TXV	16			13.7	MV20L24**B*
	EA*4X60*24A*	46000	TDR&TXV	15			12.7	*9MPV100
	EA*4X60*24A*	46000	TDR&TXV	15.2			13	*9MPV125
	EA*4X60*24A*	46000	TDR&TXV	15			13	*9MVX080
	EA*4X60*24A*	45500	TDR&TXV	15.2			13	*9MVX100
	EA*4X60*24A*	46000	TXV			14.5	12.5	
	ED*4X48F**	45000	TDR&TXV	14.5			12.7	*8MV*0901716**
	ED*4X48F**	45000	TDR&TXV	15			12.7	*8MV*1102120**
	ED*4X48F**	45000	TDR&TXV	15			12.7	*8MX*0902116**
	ED*4X48F**	45000	TDR&TXV	15.2			13.2	*8MX*1102120**
	ED*4X48F**	44500	TDR&TXV	14.5			12.5	*9MA*1002120A**
	ED*4X48F**	45000	TDR&TXV	14.5			12.5	*9MV*1002116A**
	ED*4X48F**	45000	TDR&TXV	14.5			12.5	*9MX*1002116A**
	ED*4X48F**	45000	TXV			14.2	12.2	
	ED*4X48J**	44500	TDR&TXV	14.5			12	*9MA*1002120A**
	ED*4X48J**	44500	TDR&TXV	15			12.5	*9MA*1202422A**
	ED*4X48J**	44500	TDR&TXV	14.5			12	*9MV*1002116A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA648GKA	ED*4X48J**	44500	TDR&TXV	15			12.5	*9MV*1202422A**
	ED*4X48J**	44500	TDR&TXV	14.5			12	*9MX*1002116A**
	ED*4X48J**	45000	TDR&TXV	15			12.5	*9MX*1202422A**
	ED*4X48J**	45000	TDR&TXV	15.5			13.2	MV16J22**B*
	ED*4X48J**	45000	TDR&TXV	15.5			13.2	MV20L24**B*
	ED*4X48J**	45000	TDR&TXV	14.5			12.5	*9MPV100
	ED*4X48J**	45000	TDR&TXV	14.5			12.5	*9MPV125
	ED*4X48J**	45000	TDR&TXV	14.5			12.5	*9MVX080
	ED*4X48J**	45000	TXV			14	12	
	ED*4X48L**	44500	TDR&TXV	15			12.7	*8MV*1102120**
	ED*4X48L**	45000	TDR&TXV	15.2			13	*8MV*1352422**
	ED*4X48L**	45000	TDR&TXV	15			12.7	*8MX*0902116**
	ED*4X48L**	45000	TDR&TXV	15.2			13	*8MX*1102120**
	ED*4X48L**	45000	TDR&TXV	15			13	*8MX*1352420**
	ED*4X48L**	44500	TDR&TXV	14.5			12.7	*9MA*1002120A**
	ED*4X48L**	44500	TDR&TXV	15			12.7	*9MA*1202422A**
	ED*4X48L**	44500	TDR&TXV	14.5			12.5	*9MV*1002116A**
	ED*4X48L**	45000	TDR&TXV	15			12.7	*9MV*1202422A**
	ED*4X48L**	44500	TDR&TXV	14.5			12.5	*9MX*1002116A**
	ED*4X48L**	45000	TDR&TXV	15			12.7	*9MX*1202422A**
	ED*4X48L**	45000	TDR&TXV	16			13.2	MV16J22**B*
	ED*4X48L**	45000	TDR&TXV	16			13.2	MV20L24**B*
	ED*4X48L**	45000	TDR&TXV	14.5			12.5	*9MPV100
	ED*4X48L**	45000	TDR&TXV	14.5			12.7	*9MPV125
	ED*4X48L**	45000	TDR&TXV	14.5			12.5	*9MVX080
	ED*4X48L**	45000	TDR&TXV	14.5			12.7	*9MVX100
	ED*4X48L**	45500	TDR&TXV	14.5			12.5	OLV154F20A
	ED*4X48L**	45000	TXV			14	12.2	
	ED*4X60J**	45500	TDR&TXV	15.5			13.2	*8MV*1102120**
	ED*4X60J**	45500	TDR&TXV	16			13.2	*8MV*1352422**
	ED*4X60J**	46000	TDR&TXV	15.5			13.2	*8MX*0902116**
	ED*4X60J**	45500	TDR&TXV	16			13.2	*8MX*1102120**
	ED*4X60J**	45500	TDR&TXV	15.5			13.2	*8MX*1352420**
	ED*4X60J**	45000	TDR&TXV	15			12.7	*9MA*1002120A**
	ED*4X60J**	45000	TDR&TXV	15.5			13.2	*9MA*1202422A**
	ED*4X60J**	45500	TDR&TXV	14.5			12.7	*9MV*1002116A**
	ED*4X60J**	45500	TDR&TXV	15.5			13.2	*9MV*1202422A**
	ED*4X60J**	45500	TDR&TXV	15			12.7	*9MX*1002116A**
	ED*4X60J**	45500	TDR&TXV	15.5			13.2	*9MX*1202422A**
	ED*4X60J**	46000	TDR&TXV	16			13.7	MV16J22**B*
	ED*4X60J**	46000	TDR&TXV	16			13.7	MV20L24**B*
	ED*4X60J**	46000	TDR&TXV	15			12.7	*9MPV100
	ED*4X60J**	46000	TDR&TXV	15.2			13	*9MPV125

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.
 New ratings may be listed online before Specification Sheets are updated.

Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA648GKA	ED*4X60J**	46000	TDR&TXV	15			12.7	*9MVX080
	ED*4X60J**	45500	TDR&TXV	15.2			13	*9MVX100
	ED*4X60J**	46000	TXV			14.5	12.5	
	ED*4X60L**	45500	TDR&TXV	16			13	*8MV*1352422**
	ED*4X60L**	46000	TDR&TXV	15.5			13	*8MX*1352420**
	ED*4X60L**	45000	TDR&TXV	15.2			12.5	*9MA*1002120A**
	ED*4X60L**	45500	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ED*4X60L**	45000	TDR&TXV	15.2			12.5	*9MV*1002116A**
	ED*4X60L**	45500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ED*4X60L**	45500	TDR&TXV	15			12.5	*9MX*1002116A**
	ED*4X60L**	46000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	ED*4X60L**	46000	TDR&TXV	16			13.7	MV16J22**B*
	ED*4X60L**	46000	TDR&TXV	16			13.7	MV20L24**B*
	ED*4X60L**	46000	TDR&TXV	15			12.7	*9MPV100
	ED*4X60L**	46000	TDR&TXV	15.2			13	*9MPV125
	ED*4X60L**	46000	TDR&TXV	15			13	*9MVX080
	ED*4X60L**	45500	TDR&TXV	15.2			13	*9MVX100
	ED*4X60L**	46000	TXV			14.5	12.5	
	EHD4X48A**	45000	TDR&TXV	15			13	*8MV*0901716**
	EHD4X48A**	45000	TDR&TXV	15.2			13	*8MV*1102120**
	EHD4X48A**	45500	TDR&TXV	15.2			13	*8MV*1352422**
	EHD4X48A**	45500	TDR&TXV	15.2			13	*8MX*0902116**
	EHD4X48A**	45500	TDR&TXV	15.5			13	*8MX*1102120**
	EHD4X48A**	45500	TDR&TXV	15.2			13	*8MX*1352420**
	EHD4X48A**	45000	TDR&TXV	15			12.5	*9MA*1002120A**
	EHD4X48A**	45000	TDR&TXV	15.2			12.7	*9MA*1202422A**
	EHD4X48A**	45000	TDR&TXV	14.5			12	*9MV*0801716A**
	EHD4X48A**	45000	TDR&TXV	14.7			12.5	*9MV*1002116A**
	EHD4X48A**	45000	TDR&TXV	15.2			12.7	*9MV*1202422A**
	EHD4X48A**	45000	TDR&TXV	14.5			12	*9MX*0801716A**
	EHD4X48A**	45000	TDR&TXV	14.7			12.5	*9MX*1002116A**
	EHD4X48A**	45500	TDR&TXV	15.2			12.7	*9MX*1202422A**
	EHD4X48A**	45500	TDR&TXV	16			13.5	MV16J22**B*
	EHD4X48A**	45500	TDR&TXV	16			13.5	MV20L24**B*
	EHD4X48A**	45500	TDR&TXV	14.5			12.7	*9MPV100
	EHD4X48A**	45500	TDR&TXV	15			12.7	*9MPV125
	EHD4X48A**	45500	TDR&TXV	14.5			12.5	*9MVX080
	EHD4X48A**	45500	TDR&TXV	15			12.5	*9MVX100
	EHD4X48A**	45000	TDR&TXV	14.5			12	OLV112A16A
	EHD4X48A**	46000	TDR&TXV	14.5			12.5	OLV154F20A
EHD4X48A**	46000	TXV			14.2	12		
EHD4X60A**	45500	TDR&TXV	15.5			13	*8MV*0901716**	
EHD4X60A**	46000	TDR&TXV	15.5			13	*8MV*1102120**	
EHD4X60A**	46000	TDR&TXV	16			13	*8MV*1352422**	
EHD4X60A**	46000	TDR&TXV	15.5			13	*8MX*0902116**	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA648GKA	EHD4X60A**	46000	TDR&TXV	16			13	*8MX*1102120**
	EHD4X60A**	46000	TDR&TXV	16			13	*8MX*1352420**
	EHD4X60A**	45500	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EHD4X60A**	45500	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EHD4X60A**	45500	TDR&TXV	15.2			12.5	*9MV*0801716A**
	EHD4X60A**	45500	TDR&TXV	15.5			12.7	*9MV*1002116A**
	EHD4X60A**	46000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EHD4X60A**	45500	TDR&TXV	15			12.5	*9MX*0801716A**
	EHD4X60A**	46000	TDR&TXV	15.2			12.5	*9MX*1002116A**
	EHD4X60A**	46000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EHD4X60A**	46500	TDR&TXV	16			13.7	MV16J22**B*
	EHD4X60A**	46500	TDR&TXV	16			13.7	MV20L24**B*
	EHD4X60A**	46000	TDR&TXV	15.2			13	*9MPV100
	EHD4X60A**	46000	TDR&TXV	15.5			13.2	*9MPV125
	EHD4X60A**	46000	TDR&TXV	15.2			13	*9MVX080
	EHD4X60A**	46000	TDR&TXV	15.2			13	*9MVX100
	EHD4X60A**	46000	TDR&TXV	14.5			12.5	OLV112A16A
	EHD4X60A**	47000	TDR&TXV	15.5			13	OLV154F20A
	EHD4X60A**	46500	TXV			14.5	12.5	
	EN(A,D)4X48*24**	45000	TDR&TXV	15.2			13	*8MV*1102120**
	EN(A,D)4X48*24**	45000	TDR&TXV	15.2			13	*8MV*1352422**
	EN(A,D)4X48*24**	45000	TDR&TXV	15.2			13	*8MX*0902116**
	EN(A,D)4X48*24**	45000	TDR&TXV	15.5			13	*8MX*1102120**
	EN(A,D)4X48*24**	45000	TDR&TXV	15.2			13	*8MX*1352420**
	EN(A,D)4X48*24**	44500	TDR&TXV	14.5			12.5	*9MA*1002120A**
	EN(A,D)4X48*24**	44500	TDR&TXV	15.2			12.5	*9MA*1202422A**
	EN(A,D)4X48*24**	44500	TDR&TXV	15			12.5	*9MV*1002116A**
	EN(A,D)4X48*24**	45000	TDR&TXV	15.2			12.5	*9MV*1202422A**
	EN(A,D)4X48*24**	45000	TDR&TXV	14.5			12	*9MX*1002116A**
	EN(A,D)4X48*24**	45000	TDR&TXV	15.2			12.5	*9MX*1202422A**
	EN(A,D)4X48*24**	45500	TDR&TXV	16			13.5	MV16J22**B*
	EN(A,D)4X48*24**	45500	TDR&TXV	16			13.5	MV20L24**B*
	EN(A,D)4X48*24**	45000	TDR&TXV	14.5			12.5	*9MPV100
	EN(A,D)4X48*24**	45000	TDR&TXV	14.5			12.7	*9MPV125
	EN(A,D)4X48*24**	45000	TDR&TXV	14.5			12.5	*9MVX080
	EN(A,D)4X48*24**	45000	TDR&TXV	14.5			12.5	*9MVX100
	EN(A,D)4X48*24**	45500	TXV			14	12	
	EN(A,D)4X61*24**	46000	TDR&TXV	16			13.5	*8MV*1102120**
	EN(A,D)4X61*24**	46000	TDR&TXV	16			13	*8MV*1352422**
	EN(A,D)4X61*24**	46500	TDR&TXV	16			13	*8MX*0902116**
	EN(A,D)4X61*24**	46500	TDR&TXV	16			13.5	*8MX*1102120**
	EN(A,D)4X61*24**	46500	TDR&TXV	16			13	*8MX*1352420**
	EN(A,D)4X61*24**	46000	TDR&TXV	15.5			12.7	*9MA*1002120A**
	EN(A,D)4X61*24**	46000	TDR&TXV	16			13	*9MA*1202422A**
	EN(A,D)4X61*24**	46000	TDR&TXV	15.5			12.7	*9MV*1002116A**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor EER blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA648GKA	EN(A,D)4X61*24**	46000	TDR&TXV	16			13	*9MV*1202422A**
	EN(A,D)4X61*24**	46000	TDR&TXV	15.5			12.7	*9MX*1002116A**
	EN(A,D)4X61*24**	46500	TDR&TXV	16			13	*9MX*1202422A**
	EN(A,D)4X61*24**	46500	TDR&TXV	16.5			14	MV16J22**B*
	EN(A,D)4X61*24**	46500	TDR&TXV	16.5			14	MV20L24**B*
	EN(A,D)4X61*24**	46500	TDR&TXV	15.2			13	*9MPV100
	EN(A,D)4X61*24**	46500	TDR&TXV	15.5			13.2	*9MPV125
	EN(A,D)4X61*24**	46500	TDR&TXV	15.2			13	*9MVX080
	EN(A,D)4X61*24**	46500	TDR&TXV	15.5			13	*9MVX100
	EN(A,D,W)4X48*21**	45000	TDR&TXV	15			12.5	*8MV*0901716**
	EN(A,D,W)4X48*21**	45000	TDR&TXV	15.2			13	*8MV*1102120**
	EN(A,D,W)4X48*21**	45000	TDR&TXV	15.2			13	*8MX*0902116**
	EN(A,D,W)4X48*21**	45000	TDR&TXV	15.5			13	*8MX*1102120**
	EN(A,D,W)4X48*21**	44500	TDR&TXV	14.5			12.5	*9MA*1002120A**
	EN(A,D,W)4X48*21**	44500	TDR&TXV	14.5			12	*9MV*0801716A**
	EN(A,D,W)4X48*21**	44500	TDR&TXV	15			12.5	*9MV*1002116A**
	EN(A,D,W)4X48*21**	44500	TDR&TXV	14.5			12	*9MX*0801716A**
	EN(A,D,W)4X48*21**	45000	TDR&TXV	14.5			12	*9MX*1002116A**
	EN(A,D,W)4X48*21**	45500	TDR&TXV	16			13.5	MV16J22**B*
	EN(A,D,W)4X48*21**	45000	TDR&TXV	14.5			12.5	*9MPV100
	EN(A,D,W)4X48*21**	45000	TDR&TXV	14.5			12.5	*9MVX080
	EN(A,D,W)4X48*21**	45000	TDR&TXV	14.5			12	OLV112A16A
	EN(A,D,W)4X48*21**	45500	TXV			14	12	
	EN(A,D,W)4X60*24**	45500	TDR&TXV	15.5			13	*8MV*1102120**
	EN(A,D,W)4X60*24**	45500	TDR&TXV	16			13	*8MV*1352422**
	EN(A,D,W)4X60*24**	46000	TDR&TXV	15.5			13	*8MX*0902116**
	EN(A,D,W)4X60*24**	46000	TDR&TXV	16			13.5	*8MX*1102120**
	EN(A,D,W)4X60*24**	46000	TDR&TXV	15.5			13	*8MX*1352420**
	EN(A,D,W)4X60*24**	45000	TDR&TXV	15.2			12.7	*9MA*1002120A**
	EN(A,D,W)4X60*24**	45500	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EN(A,D,W)4X60*24**	45000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	EN(A,D,W)4X60*24**	45500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EN(A,D,W)4X60*24**	45500	TDR&TXV	15			12.5	*9MX*1002116A**
	EN(A,D,W)4X60*24**	46000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EN(A,D,W)4X60*24**	46000	TDR&TXV	16			13.7	MV16J22**B*
	EN(A,D,W)4X60*24**	46000	TDR&TXV	16			13.7	MV20L24**B*
	EN(A,D,W)4X60*24**	46000	TDR&TXV	15			12.7	*9MPV100
	EN(A,D,W)4X60*24**	46000	TDR&TXV	15.2			13	*9MPV125
	EN(A,D,W)4X60*24**	46000	TDR&TXV	15			13	*9MVX080
	EN(A,D,W)4X60*24**	46000	TDR&TXV	15.2			13	*9MVX100
	EN(A,D,W)4X60*24**	46000	TXV			14.5	12.5	
	ENH4X48*21**	45000	TDR&TXV	15			12.5	*8MV*0901716**
	ENH4X48*21**	45000	TDR&TXV	15.2			13	*8MV*1102120**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA648GKA	ENH4X48*21**	45000	TDR&TXV	15.2			13	*8MV*1352422**
	ENH4X48*21**	45000	TDR&TXV	15.2			13	*8MX*0902116**
	ENH4X48*21**	45000	TDR&TXV	15.5			13	*8MX*1102120**
	ENH4X48*21**	45000	TDR&TXV	15.2			13	*8MX*1352420**
	ENH4X48*21**	44500	TDR&TXV	15			12.5	*9MA*1002120A**
	ENH4X48*21**	44500	TDR&TXV	15.2			12.5	*9MA*1202422A**
	ENH4X48*21**	44500	TDR&TXV	14.5			12	*9MV*0801716A**
	ENH4X48*21**	44500	TDR&TXV	15			12.5	*9MV*1002116A**
	ENH4X48*21**	45000	TDR&TXV	15.2			12.5	*9MV*1202422A**
	ENH4X48*21**	44500	TDR&TXV	14.5			12	*9MX*0801716A**
	ENH4X48*21**	45000	TDR&TXV	14.5			12	*9MX*1002116A**
	ENH4X48*21**	45000	TDR&TXV	15.2			12.5	*9MX*1202422A**
	ENH4X48*21**	45500	TDR&TXV	16			13.5	MV16J22**B*
	ENH4X48*21**	45500	TDR&TXV	16			13.5	MV20L24**B*
	ENH4X48*21**	45000	TDR&TXV	14.5			12.5	*9MPV100
	ENH4X48*21**	45000	TDR&TXV	14.5			12.7	*9MPV125
	ENH4X48*21**	45000	TDR&TXV	14.5			12.5	*9MVX080
	ENH4X48*21**	45000	TDR&TXV	14.5			12.5	*9MVX100
	ENH4X48*21**	45000	TDR&TXV	14.5			12	OLV112A16A
	ENH4X48*21**	46000	TDR&TXV	14.5			12.5	OLV154F20A
	ENH4X48*21**	45500	TXV			14	12	
	ENH4X60*24**	45500	TDR&TXV	15.2			13	*8MV*0901716**
	ENH4X60*24**	45500	TDR&TXV	15.5			13	*8MV*1102120**
	ENH4X60*24**	45500	TDR&TXV	16			13	*8MV*1352422**
	ENH4X60*24**	46000	TDR&TXV	15.5			13	*8MX*0902116**
	ENH4X60*24**	46000	TDR&TXV	16			13	*8MX*1102120**
	ENH4X60*24**	46000	TDR&TXV	15.5			13	*8MX*1352420**
	ENH4X60*24**	45000	TDR&TXV	15.2			12.7	*9MA*1002120A**
	ENH4X60*24**	45500	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ENH4X60*24**	45000	TDR&TXV	15			12.5	*9MV*0801716A**
	ENH4X60*24**	45000	TDR&TXV	15.2			12.7	*9MV*1002116A**
	ENH4X60*24**	45500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ENH4X60*24**	45500	TDR&TXV	14.5			12.5	*9MX*0801716A**
	ENH4X60*24**	45500	TDR&TXV	15			12.5	*9MX*1002116A**
	ENH4X60*24**	46000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	ENH4X60*24**	46000	TDR&TXV	16			13.7	MV16J22**B*
	ENH4X60*24**	46000	TDR&TXV	16			13.7	MV20L24**B*
	ENH4X60*24**	46000	TDR&TXV	15			12.7	*9MPV100
	ENH4X60*24**	46000	TDR&TXV	15.2			13	*9MPV125
	ENH4X60*24**	46000	TDR&TXV	15			12.7	*9MVX080
	ENH4X60*24**	46000	TDR&TXV	15.2			13	*9MVX100
	ENH4X60*24**	45500	TDR&TXV	14.5			12.5	OLV112A16A
	ENH4X60*24**	46500	TDR&TXV	15.2			13	OLV154F20A
	ENH4X60*24**	46000	TXV			14.5	12.5	
	ENH4X61*24**	45500	TDR&TXV	15.2			13	*8MV*0901716**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor EER blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA648GKA	ENH4X61*24**	45500	TDR&TXV	15.5			13	*8MV*1102120**
	ENH4X61*24**	46000	TDR&TXV	16			13	*8MV*1352422**
	ENH4X61*24**	46000	TDR&TXV	15.5			13	*8MX*0902116**
	ENH4X61*24**	46000	TDR&TXV	16			13	*8MX*1102120**
	ENH4X61*24**	46000	TDR&TXV	15.5			13	*8MX*1352420**
	ENH4X61*24**	45500	TDR&TXV	15.2			12.7	*9MA*1002120A**
	ENH4X61*24**	45500	TDR&TXV	15.5			12.7	*9MA*1202422A**
	ENH4X61*24**	45500	TDR&TXV	14.5			12.5	*9MV*0801716A**
	ENH4X61*24**	45500	TDR&TXV	15.2			12.7	*9MV*1002116A**
	ENH4X61*24**	45500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ENH4X61*24**	45500	TDR&TXV	14.7			12.5	*9MX*0801716A**
	ENH4X61*24**	45500	TDR&TXV	15			12.5	*9MX*1002116A**
	ENH4X61*24**	46000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	ENH4X61*24**	46000	TDR&TXV	16			13.7	MV16J22**B*
	ENH4X61*24**	46000	TDR&TXV	16			13.7	MV20L24**B*
	ENH4X61*24**	46000	TDR&TXV	15			12.7	*9MPV100
	ENH4X61*24**	46000	TDR&TXV	15.2			13	*9MPV125
	ENH4X61*24**	46000	TDR&TXV	15.2			13	*9MVX080
	ENH4X61*24**	46000	TDR&TXV	15.2			13	*9MVX100
	ENH4X61*24**	45500	TDR&TXV	14.5			12.5	OLV112A16A
	ENH4X61*24**	46500	TDR&TXV	15.2			13	OLV154F20A
ENH4X61*24**	46500	TXV			14.5	12.5		

* Tested Combo

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE

For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org.

New ratings may be listed online before Specification Sheets are updated.

Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA660GKA	*EN(A,D)4X61*24**	55000	TXV			14.5	12.5	
	FCM4X60****	54500	TDR&TXV	16			13.5	
	FEM4X60****	55000	TDR&TXV	15.5			13.2	
	FEM4X60**B*	54000	TDR&TXV	15			12.5	
	FVM4X60****	54500	TDR&TXV	16			13.5	
	FXM4X60**A*	55000	TDR&TXV	15.5			13	
	EA*4X60*21A*	53500	TDR&TXV	15			12.5	*8MV*1102120**
	EA*4X60*21A*	53500	TDR&TXV	15.5			13	*8MX*1102120**
	EA*4X60*21A*	53000	TDR&TXV	14.5			12	*9MA*1002120A**
	EA*4X60*21A*	54000	TDR&TXV	16			13.2	MV16J22**B*
	EA*4X60*21A*	53500	TXV			14.5	12.5	
	EA*4X60*24A*	53500	TDR&TXV	15			13	*8MV*1102120**
	EA*4X60*24A*	53500	TDR&TXV	15.5			13	*8MV*1352422**
	EA*4X60*24A*	53500	TDR&TXV	15.5			13	*8MX*1102120**
	EA*4X60*24A*	53500	TDR&TXV	15.2			13	*8MX*1352420**
	EA*4X60*24A*	53000	TDR&TXV	14.5			12	*9MA*1002120A**
	EA*4X60*24A*	53500	TDR&TXV	15.2			12.7	*9MA*1202422A**
	EA*4X60*24A*	53500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EA*4X60*24A*	53500	TDR&TXV	15.2			12.7	*9MX*1202422A**
	EA*4X60*24A*	54000	TDR&TXV	16			13.2	MV16J22**B*
	EA*4X60*24A*	54000	TDR&TXV	16			13.2	MV20L24**B*
	EA*4X60*24A*	54500	TXV			14.5	12.5	
	ED*4X60J**	53500	TDR&TXV	15			12.7	*8MV*1102120**
	ED*4X60J**	53500	TDR&TXV	15.2			13	*8MV*1352422**
	ED*4X60J**	53500	TDR&TXV	15.5			13	*8MX*1102120**
	ED*4X60J**	53500	TDR&TXV	15.2			13	*8MX*1352420**
	ED*4X60J**	53500	TDR&TXV	15			12.7	*9MA*1202422A**
	ED*4X60J**	53500	TDR&TXV	15.2			13	*9MV*1202422A**
	ED*4X60J**	53500	TDR&TXV	15			12.7	*9MX*1202422A**
	ED*4X60J**	54000	TDR&TXV	16			13.2	MV16J22**B*
	ED*4X60J**	54000	TDR&TXV	16			13.2	MV20L24**B*
	ED*4X60J**	54000	TXV			14.5	12.7	
	ED*4X60L**	53500	TDR&TXV	15.5			13	*8MV*1352422**
	ED*4X60L**	53500	TDR&TXV	15.2			13	*8MX*1352420**
	ED*4X60L**	53000	TDR&TXV	14.5			12	*9MA*1002120A**
	ED*4X60L**	53500	TDR&TXV	15.2			12.7	*9MA*1202422A**
	ED*4X60L**	53500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ED*4X60L**	53500	TDR&TXV	15.2			12.7	*9MX*1202422A**
	ED*4X60L**	54000	TDR&TXV	16			13.2	MV16J22**B*
	ED*4X60L**	54000	TDR&TXV	16			13.2	MV20L24**B*
	ED*4X60L**	54500	TXV			14.5	12.5	
	EHD4X60A**	54000	TDR&TXV	15.2			13	*8MV*1102120**
	EHD4X60A**	54000	TDR&TXV	15.5			13	*8MV*1352422**
	EHD4X60A**	54000	TDR&TXV	15.5			13	*8MX*1102120**
	EHD4X60A**	54000	TDR&TXV	15.5			13	*8MX*1352420**

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor EER blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
Standard	TDR			TXV				
CSA660GKA	EHD4X60A**	53500	TDR&TXV	15			12.5	*9MA*1002120A**
	EHD4X60A**	54000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EHD4X60A**	54000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EHD4X60A**	54000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EHD4X60A**	54500	TDR&TXV	16			13.5	MV16J22**B*
	EHD4X60A**	54500	TDR&TXV	16			13.5	MV20L24**B*
	EHD4X60A**	54500	TXV			14.5	12.5	
	EN(A,D)4X61*24**	54500	TDR&TXV	15.2			13	*8MV*1102120**
	EN(A,D)4X61*24**	54500	TDR&TXV	16			13	*8MV*1352422**
	EN(A,D)4X61*24**	54500	TDR&TXV	16			13	*8MX*1102120**
	EN(A,D)4X61*24**	54500	TDR&TXV	15.5			13	*8MX*1352420**
	EN(A,D)4X61*24**	54000	TDR&TXV	15			12.5	*9MA*1002120A**
	EN(A,D)4X61*24**	54000	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EN(A,D)4X61*24**	54000	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EN(A,D)4X61*24**	54000	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EN(A,D)4X61*24**	55000	TDR&TXV	16			13.7	MV16J22**B*
	EN(A,D)4X61*24**	55000	TDR&TXV	16			13.7	MV20L24**B*
	EN(A,D)4X61*24**	54500	TDR&TXV	14.5			12.5	*9MVX080
	EN(A,D)4X61*24**	54500	TDR&TXV	14.5			12.5	*9MVX100
	EN(A,D,W)4X60*24**	53500	TDR&TXV	15.2			12.5	*8MV*1102120**
	EN(A,D,W)4X60*24**	53500	TDR&TXV	15.5			13	*8MV*1352422**
	EN(A,D,W)4X60*24**	54000	TDR&TXV	15.5			13	*8MX*1102120**
	EN(A,D,W)4X60*24**	53500	TDR&TXV	15.2			13	*8MX*1352420**
	EN(A,D,W)4X60*24**	53000	TDR&TXV	14.5			12.5	*9MA*1002120A**
	EN(A,D,W)4X60*24**	53500	TDR&TXV	15.5			12.7	*9MA*1202422A**
	EN(A,D,W)4X60*24**	53500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	EN(A,D,W)4X60*24**	53500	TDR&TXV	15.5			12.7	*9MX*1202422A**
	EN(A,D,W)4X60*24**	54000	TDR&TXV	16			13.5	MV16J22**B*
	EN(A,D,W)4X60*24**	54000	TDR&TXV	16			13.5	MV20L24**B*
	EN(A,D,W)4X60*24**	53500	TDR&TXV	14.5			12	*9MVX080
	EN(A,D,W)4X60*24**	53500	TDR&TXV	14.5			12.5	*9MVX100
	EN(A,D,W)4X60*24**	54500	TXV			14.5	12.5	
	ENH4X60*24**	53500	TDR&TXV	15.2			13	*8MV*1102120**
	ENH4X60*24**	53500	TDR&TXV	15.5			13	*8MV*1352422**
	ENH4X60*24**	54000	TDR&TXV	15.5			13	*8MX*1102120**
	ENH4X60*24**	53500	TDR&TXV	15.2			13	*8MX*1352420**
	ENH4X60*24**	53000	TDR&TXV	14.5			12.5	*9MA*1002120A**
	ENH4X60*24**	53500	TDR&TXV	15.2			12.7	*9MA*1202422A**
	ENH4X60*24**	53500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ENH4X60*24**	53500	TDR&TXV	15.2			12.7	*9MX*1202422A**
	ENH4X60*24**	54000	TDR&TXV	16			13.5	MV16J22**B*
	ENH4X60*24**	54000	TDR&TXV	16			13.5	MV20L24**B*
	ENH4X60*24**	53500	TDR&TXV	14.5			12	*9MVX080
	ENH4X60*24**	53500	TDR&TXV	14.5			12.5	*9MVX100
	ENH4X60*24**	54500	TXV			14.5	12.5	

2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device

COOLING PERFORMANCE								
For complete ratings information, use the AHRI website directory search: www.AHRIdirectory.org .								
New ratings may be listed online before Specification Sheets are updated.								
Model Size	Indoor Model	AHRI STANDARD RATINGS						Furnace Model
		COOLING 95° F (35° C)						
		Capacity	Factory Enhance	SEER			EER	
				Standard	TDR	TXV		
CSA660GKA	ENH4X61*24**	54000	TDR&TXV	15.2			13	*8MV*1102120**
	ENH4X61*24**	54000	TDR&TXV	15.5			13	*8MV*1352422**
	ENH4X61*24**	54000	TDR&TXV	15.5			13	*8MX*1102120**
	ENH4X61*24**	53500	TDR&TXV	15.2			13	*8MX*1352420**
	ENH4X61*24**	53500	TDR&TXV	14.5			12	*9MA*1002120A**
	ENH4X61*24**	53500	TDR&TXV	15.2			12.7	*9MA*1202422A**
	ENH4X61*24**	53500	TDR&TXV	15.5			12.7	*9MV*1202422A**
	ENH4X61*24**	53500	TDR&TXV	15.2			12.7	*9MX*1202422A**
	ENH4X61*24**	54500	TDR&TXV	16			13.5	MV16J22**B*
	ENH4X61*24**	54500	TDR&TXV	16			13.2	MV20L24**B*
	ENH4X61*24**	54000	TDR&TXV	14.5			12	*9MVX080
	ENH4X61*24**	54000	TDR&TXV	14.5			12.5	*9MVX100
	ENH4X61*24**	54000	TXV			14.5	12.5	
	* Tested Combo							
2009 ENERGY STAR compliance for combinations with both: SEER 14.50 or higher and EER 12.00 or higher.								
† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device								

ACCESSORY USAGE GUIDELINES		
Accessory	REQUIRED FOR LOW-AMBIENT AP-PLICATIONS {Below 55°F (13°C)}	REQUIRED FOR LONG LINE APPLICATIONS* {Over 80 Ft.(24.4m)}
Crankcase Heater	Yes	Yes
Evaporator Freeze Thermostat	Yes	No
Winter Start Control	Yes	No
Hard Start Kit (Capacitor & Relay)	Yes	Yes
Low Ambient Kit (Pressure Switch)	Yes	No
Support Feet, 4" (102mm) tall	Recommended	No
Liquid Line Solenoid Valve	No	See Long-Line Application Guideline

* For Line Set lengths between 80 and 200 ft (24.4 and 61m) horizontal, or more than 20 ft (6.1m) indoor-outdoor vertical separation, refer to the Long Line Application Guideline document.

ACCESSORIES		
Part Number	Description	Used On Model Size
NASA003CH	Crankcase Heater for Scroll Compressor (208/230 V)	18, 24, 30, 36
NASA001CH	Crankcase Heater for Scroll Compressor (208/230 V)	42, 48, 60*
NASA001SC	Start Component – PTC Device	ALL
NASA001FS	Evaporator Freeze Thermostat	ALL
NASA401LS	Liquid Line Solenoid Valve, R-410A	ALL
NASA001TD	Time Delay Relay, Indoor Blower	ALL
NASA001WS	Winter Start Control	ALL
NASA001AC	Anti-Cycle Timer (5 minute delay)	ALL
NASA014SC	Hard Start Kit (Capacitor & Relay)	ALL
NASA401LA	Low Ambient Kit (Pressure Switch), R-410A	ALL
NASA001SF	Support Feet, 4" (102mm) tall	ALL
NAEA40501TX	TXV Kit, R-410A – 2010 and later Piston Coils	18, 24, 30
NAEA40601TX	TXV Kit, R-410A – 2010 and later Piston Coils	36, 42
NAEA40701TX	TXV Kit, R-410A – 2010 and later Piston Coils	48, 60
EBAC05TXVX	TXV Kit, R-410A – 2005-2009 R-22 TXV Fancoils (air handlers)	18, 24, 30
EBAC06TXVX	TXV Kit, R-410A – 2005-2009 R-22 TXV Fancoils (air handlers)	36, 42
EBAC07TXVX	TXV Kit, R-410A – 2005-2009 R-22 TXV Fancoils (air handlers)	48, 60
TSTAT0101SC	Observer™ Self Configuring Communication Wall Control	ALL

*Some models may be factory installed.