

## Fig. 134

## Heavy Duty Beam Clamp

**Size Range:** 4" through 12"

**Material:** Carbon steel

**Finish:**  Plain or  Galvanized

**Service:** Clamp centers the load on beam to prevent distortion

**Approvals:** Complies with Federal Specification A-A-1192A (Type 21)

WW-H-171-E (Type 21), ANSI/MSS SP-69 and MSS SP-58 (Type 21).

Fig. 133 UL Listed when used with  $\frac{3}{8}$ " and  $\frac{1}{2}$ " rod.



Fig. 134 UL Listed and FM Approved when used with  $\frac{1}{2}$ " and  $\frac{5}{8}$ " rod.

**Components:** Two half-clamps, pipe spacer and bolt with nut assembled.

**Ordering:** Figure number, width of flange, name and finish.

**Note:** Spacer is furnished for use with Fig. 290 weldless eye nuts.

Spacer may be removed for use with Fig 278 eye rods.

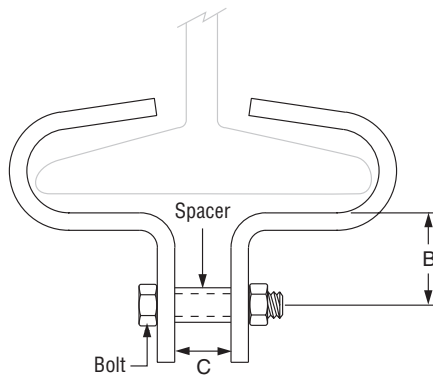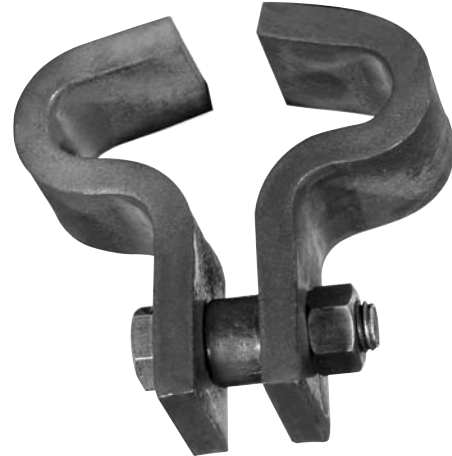

Flange Size		
Flange Width	Max Flange Thickness	Weight (lbs)
4	$\frac{1}{2}$	13.82
5	$\frac{5}{8}$	4.35
6	$\frac{3}{4}$	4.52
7	$\frac{7}{8}$	4.84
8		5.10
9	1	5.83
10		6.25
11		6.67
12		7.09

FIG. 133: LOADS (LBS) • DIMENSIONS (IN)					
	C	B	Bolt Size	Spacer O.D.	Max Load
Fig. 133	$\frac{3}{4}$	$\frac{2}{4}$	$\frac{5}{8}$	$\frac{1}{16}$	3,000

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			