


Submitted Model No.:

Specific Features:



▲ Designate Proper Finish Suffix

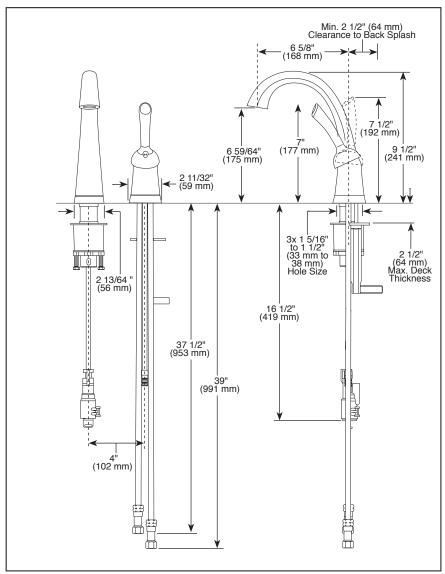

BAR/PREP FAUCETS

- Pilar® Series
- Single Handle Widespread Deck Mount

FEATURES:

- Touch₂O® Technology
- DIAMOND™ Valve with Innoflex® Watwerways

STANDARD SPECIFICATIONS:

- Maximum 1.5 qpm @ 60 PSI, 5.7 L/Min @ 414 kPa
- Two hole mount
- Diamond coated ceramic cartridge
- 3/8" O.D. straight, staggered PEX supply lines
- Spout rotates 180°
- Red/Blue indicator markings
- Dual integral check valves in sprayer
- LED indicator light signals on-off, water temperature and when batteries run low
- Uses 6 AA (included) or 6 C (optional) batteries
- Optional (EP73954) 120V AC adapter available (3 prong grounded outlet required)
- Quick Snap® connect hoses

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

ASME A112.18.1 / CSA B125.1

Indicates compliance to ICC/ANSI A117.1

• Verified compliant with .25% weighted average Pb content regulations.

