
# SPEAKMAN NEO™

### Shower Combination SM-1030-P & SM-1010-P


**SPECIFICATION** 







1"(25mm) DIA HOLE FOR SHOWER ARM

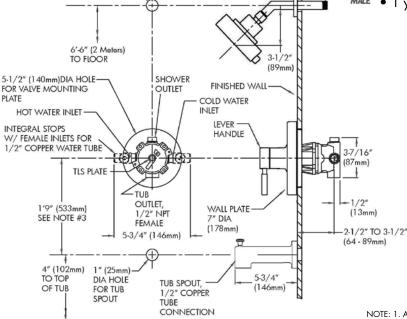

#### **FEATURES:**

- Modern style
- S-3010 showerhead
- S-2540 shower arm & flange
- SM-1000-P pressure balance shower valve & trim
- □ SM-1030-P with S-1558 diverter tub spout with slip-fit connection
- □ SM-1010-P without S-1558 diverter tub spout

#### **COMPLIANCE:**

 Certified to ASME A112.18.1/CSA B125.1 and ASSE 1016 standards



#### **AVAILABLE FINISHES:**

ADD SUFFIX TO MODEL #

- Polished Chrome (standard)
- Brushed Nickel
  □ -BN
- Polished Nickel
  □ -PN

#### **WARRANTY:**

• 1 year limited

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are ½" female copper sweat. 3. For ADA mounting locations, consult ADAAG, ANSI A117.1, or static regulations

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

## **SPEAKMAN®**

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720 P: 800-537-2107 | F: 800-977-2747 W W W . S P E A K M A N C O M P A N Y . C O M



REVISION DATE: JULY 2012