



## Product Data Sheet

# Combination Zone Sensors

Trane™ relative humidity and temperature sensors utilize a polymer capacitive-sensing element for reliable sensing accuracy and superb recovery from saturation. Temperature output is provided by a 10 kΩ, Type II thermistor. Both sensors are housed in a common enclosure for reduced installation costs and improved appearance.

### Features, Benefits, and Part Number:


| Features                     |  | Benefits  |  |
|------------------------------|--|---|--|
| Two sensors in one enclosure |  | Reduces installation costs and improved building aesthetics         |  |
| High accuracy                |  | Reduces energy costs and improves environmental control and comfort |  |
| Maintenance-free design      |  | Reduces field calibration and maintenance costs                     |  |
| Polymer capacitive element   |  | Superb recovery from saturation reduces maintenance and downtime    |  |
| Trane wall enclosure         |  | Consistent enclosure design improves building aesthetics            |  |

| Model Description |                                      | Part Number | BAYSENS     | Global Parts |
|-------------------|--------------------------------------|-------------|-------------|--------------|
| Sensors           | 3% Relative Humidity and Temperature | X1379044401 | BAYSENS036A | SEN01561     |

# Specifications

| Description                      |  |
|----------------------------------|--|
| Sensor operating temperature     | From -20°F to 140°F (-29°C to 60°C)  |
| Storage temperature              | From -85°F to 158°F (-65°C to 70°C)  |
| Operating humidity range         | From -40°F to 185°F (-40°C to 85°C)  |
| Storage/operating humidity range | 99% relative humidity (RH), noncondensing  |
| Accuracy                         | ±3% RH over 20% to 95% RH at 77°F (25°C) and includes hysteresis, linearity, and repeatability   |
| Hysteresis                       | Less than 1% RH  |
| Repeatability                    | 0.5% RH  |
| Sensitivity                      | 0.1% RH  |
| Thermistor resistance            | 10 kΩ at 77°F  |
| Temperature accuracy             | ±0.36°F (±0.2°C)   |
| Supply voltage                   | 18 to 36 Vdc   |
| Output characteristics           | 4-20 mA for 0% to 100% RH  |
| Drift rate                       | Less than 1% per year  |
| Sensing element                  | Polymer capacitive   |
| Mounting                         | Fits a standard 2 in. by 4 in. junction box (vertical mount only). Mounting holes are spaced 3.2 in. (83 mm) apart on vertical center line. Includes mounting screws for junction box or wall anchors for sheet-rock walls. Overall dimensions: 2.9 in (74 mm) by 4.7 in. (119 mm) |

## Schematic (Typical)

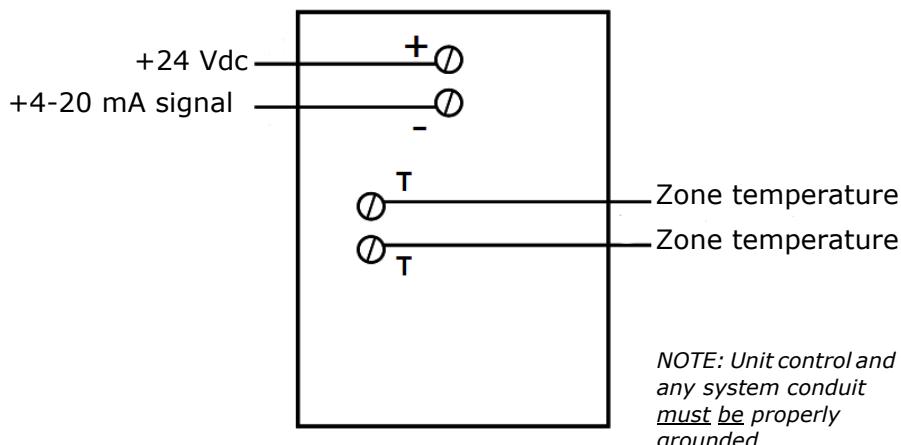

[www.trane.com](http://www.trane.com)

For more information, contact your local Trane office or e-mail us at [comfort@trane.com](mailto:comfort@trane.com)

Trane and the Trane logo are trademarks of Trane in the United States and other countries. All trademarks referenced in this document are the trademarks of their respective owners.

|                         |                        |
|-------------------------|------------------------|
| Literature Order Number | BAS-PRC026-EN          |
| Date                    | May 2008               |
| Supersedes              | BAS-PRC026-EN (Jan 08) |

Trane has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.