

Specifications

PF1600 Series

Rear Outlet Toilet Pressure Assist - 1.0 gpf



Product Features

- Two-piece vitreous china
- Floor mount back outlet bowl
- Available in round front, elongated and ADA floor mount back outlet bowls
- 1.0 gpf HET, high-efficiency toilet with pressure assist
- Equipped with EcoFlush Pressure Assist System
- 2" fully glazed trapway
- Siphon jet technology
- EPA WaterSense labeled
- Large 12-1/4" x 9-5/8" water surface
- 4-1/4" rough-in
- Close coupled tank with cover
- Only available in white
- Seat and supply not included
- Uses 35% less water than standard (1.6 gpf) low-consumption toilets

Specified Model

- PF1604PAWH*** 1.0 gpf round back outlet bowl (white)
- PF1605PAWH*** 1.0 gpf elongated back outlet bowl (white)
- PF1606PAWH**** 1.0 gpf ADA height back outlet bowl (white)
- PF1612PAWHA** 1.0 gpf pressure assist tank (white)
- PF1612PALWHA** 1.0 gpf pressure assist tank with locking lid (white)
- PF1612PARWHA** 1.0 gpf pressure assist tank with rh trip lever (white)

* Complies with CSA B651 ** Complies with ADA & CSA B651

Codes and Certifications

- IAPMO/UPC
- CSA B45.1-18
- EPA WaterSense
- ADA
- ASME A112.19.2

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO toilet carries a 5-year limited warranty on the tank fittings and a limited lifetime warranty on the porcelain. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.



PF1605PAWH/PF1612PAWHA



Specifications


PF1600 Series

Rear Outlet Toilet Pressure Assist - 1.0 gpf




Product Specifications

The combination toilet shall be made of vitreous china. Toilet shall be 1.6 gpf (3.8 lpf). Toilet shall have 2" (5.1cm) glazed trapway. Toilet shall be less seat and supply. Toilet shall be 4-1/4" (10.8cm) rough-in.

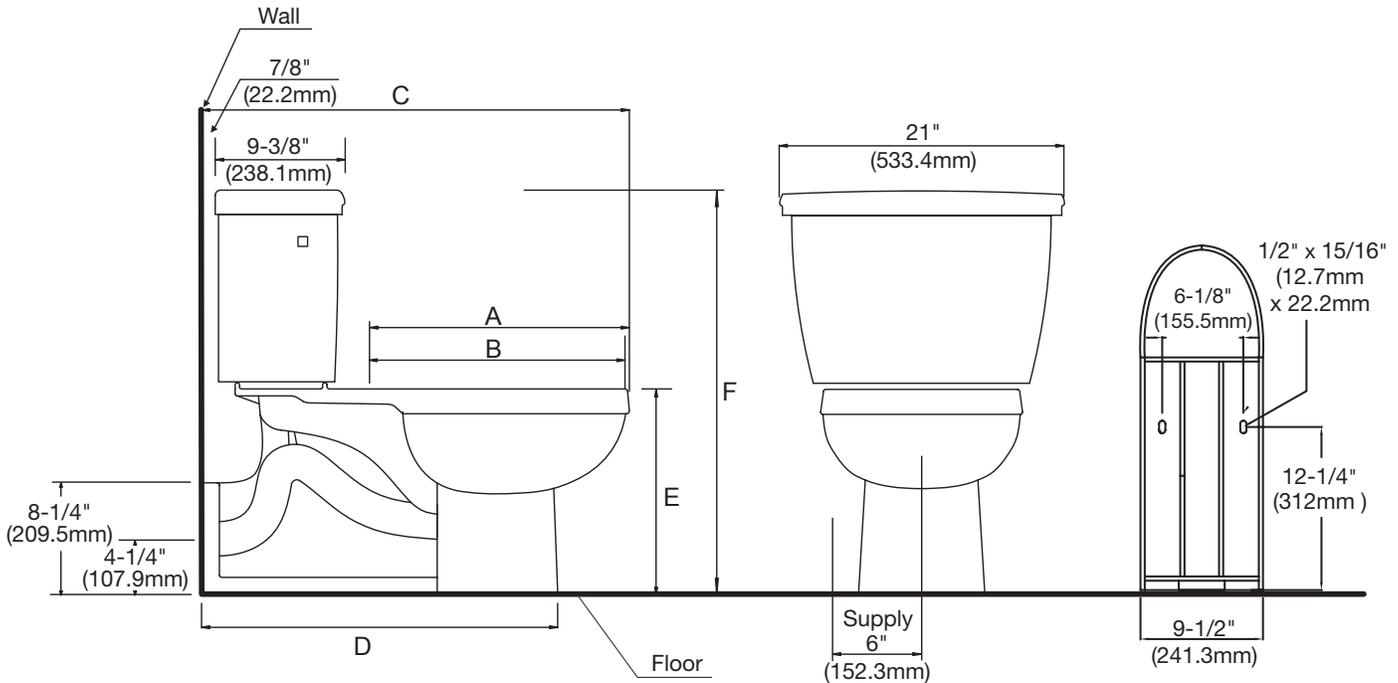

	PF1604	PF1605	PF1606
A	16-3/4" (425.4mm)	18-3/4" (477mm)	18-3/4" (477mm)
B	16-3/8" (415.9mm)	18-3/8" (466.7mm)	18-3/8" (466.7mm)
C	29" (736mm)	31-1/8" (790.6mm)	31-1/8" (790.6mm)
D	25-1/4" (641.3mm)	26" (660mm)	26-1/8" (663.6mm)
E	15-1/8" (384.2mm)	15" (381mm)	17-1/4" (438.1mm)
F	29-7/8" (758.8mm)	29-7/8" (758.2mm)	31-7/8" (809.6mm)

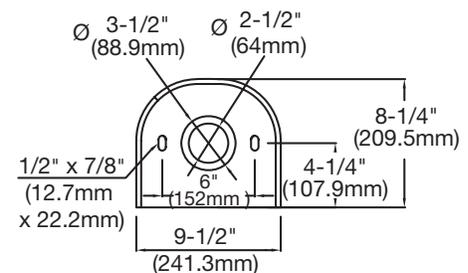

Note: All dimensions and specifications are nominal and may vary: Dimensions of 8" and greater have a tolerance of +3%. Dimensions less than 8" have a tolerance of +5%.

