

2603TWWP – EVERYDAY BATHS

inches (mm)

60 x 42 x 26 ¼ (1525 x 1070 x 665) • Fax on Demand #5064

SOAKER MODEL #2603TW

WHIRLPOOL MODEL #2603TWWP



FEATURES

- Alcove bath
- Textured tile
- Ergonomic backrest
- Integral tiling flange (3T)
- Integral skirt
- 8" wainscot
- Left or right hand drain
- Gelcoat surface
- 5-year limited warranty

Whirlpool Features:

- .75hp motor
- 6 directional hydrotherapy jets
- Color matched or clear trim
- Pneumatic on/off control
- Advanced safety suction system

OPTIONS

- Designer drain, waste & overflow

AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

COLOR & TRIM OPTIONS

Stock	Premium
Almond (C)	Black (NA)
Biscuit (C)	Mexican Sand* (NA)
Bone (C)	Sand Bar* (NA)
Linen (C)	Sterling Silver (NA)
White (C)	

C = color matched trim




NA = not applicable

* color not available for whirlpool models



2603TWWP

60 x 42 x 26 1/4 (1525 x 1070 x 665)
inches (mm)

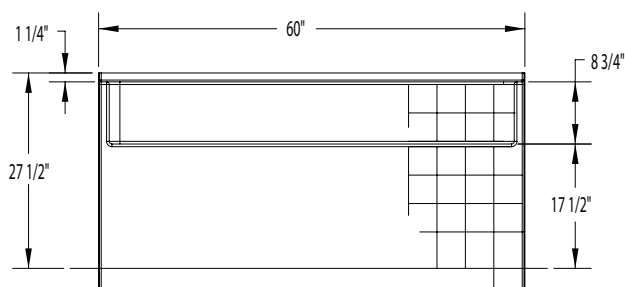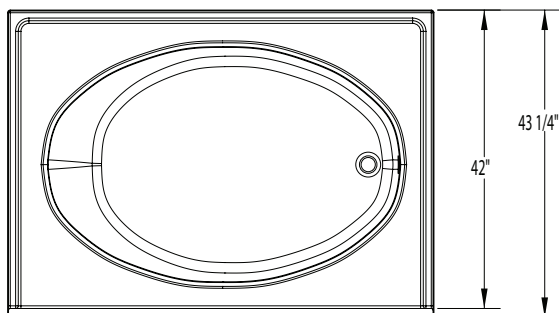

FEATURES lbs (kg) Dimensional Tolerance $\pm \frac{3}{8}$ ". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.


Model #	Material	Jets	Motor	Controls	Drain	Net Wt.	Pkg. Wt.
Soaker #2603TW	Gelcoat	-	-	-	LH or RH	80 (36)	85 (39)
Whirlpool #2603TWWP	Gelcoat	6	0.75 HP	Pneumatic	LH or RH	130 (59)	135 (61)

DIMENSIONS

Specifications	inches (mm)
Width: Overall / Net	60 (1525)
Depth: Overall / Net	43 1/4 (1100) / 42 (1070)
Height: Overall / Net	27 1/2 (700) / 26 1/4 (665)
Enclosure Opening	57 (1450)
Skirt Height	17 1/2 (445)
Drain Rough-In (from Back Wall)	21 3/4 (550)
Drain Rough-In (from Side Wall)	3 1/4 (85)
Drain: Diameter / Clearance	2 (50) / 1/2 (15)

FRAMING DIMENSIONS inches (mm)

Type	D Depth	W Width	H Height	A	B	C
Alcove	43 1/4 (1100)	60 1/8 (1525)	26 (660)	Box Out	3 1/4 (85)	21 3/4 (550)

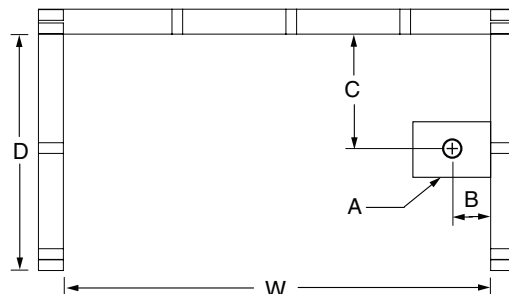

SUMP DATA

Top of Drain to Bottom of Overflow	Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
			Top	Bottom	Top	Bottom
12 1/8 (310)	67 (254)	50 (189)	51 1/8 (1300)	41 5/8 (1055)	34 1/2 (875)	29 (735)