


MODEL XB80L
VENTILATION FAN WITH LIGHT



FEATURES

- ULTRASMART™ DC Motor and Control Technology**
- DC motor for efficiency well beyond ENERGY STAR® requirements.
 - Can be used to comply with ASHRAE 62.2, LEED, ENERGY STAR® for Homes and CA Title 24.
 - Powerful operation maintained over a wide range of real-world installations (CFM ratings maintained through at least 0.25" static pressure).
 - Rated for Continuous Operation.


- ULTRASILENT™ Sound Technology**
- HVI certified, best-achievable <0.3 Sone level provides nearly silent operation for a relaxing environment.
 - State-of-the-art blower and duct outlet design smooths airflow.
 - High tech DC motor designed for nearly silent operation.

- ULTRALUCENT™ Lighting Technology**
- Two, ENERGY STAR® qualified 18 watt (max) GU24, 3500K bulbs brightly illuminate room for most any task. (bulbs included).
 - One, 4 watt (max) C7 type night-light provides night-time convenience (bulb not included).
 - Well-diffused, wide light dispersal floods room for maximum effectiveness and keeps bulbs from showing through lens.
 - Enclosed reflector for minimal light visibility through the grille.

- ULTRAQUICK™ Installation Technology**
- Unique telescoping mounting frame fits through retrofit drywall opening to allow easy installation from the room side. No attic access needed!
 - Captive screws allow for easy new construction installation.
 - Mounting frame positioning tabs provide easy vertical positioning for new construction.
 - Easy to insert and remove snap-in housing. No screws required!
 - Easy to insert and remove snap-in blower.
 - Inside or outside duct connector and knockout plate mounting provides flexibility for new construction or retrofit.

U.L. Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit (ceiling mount only).
U.L. Listed for use in insulated ceilings (Type IC).
Use only ON/OFF switch, mechanical timer or relay-switched control.
3-year warranty on product, 1-year warranty on bulbs.

DIMENSIONS (Inches)

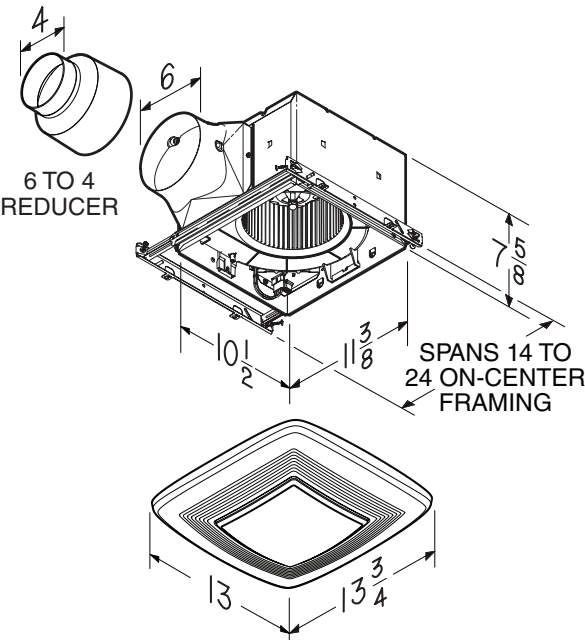

Broan-NuTone LLC Hartford, Wisconsin www.broan.com 800-558-1711

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date



PERFORMANCE SPECIFICATIONS
MODEL XB80L VENTILATION FAN WITH LIGHT

HVI PERFORMANCE

6" Duct					4" Duct				
0.1 Ps - Static Pressure (inH2O)				0.25 Ps	0.1 Ps - Static Pressure (inH2O)				0.25 Ps
Airflow (CFM)	Sound (Sones)	Power (Watts)	Efficacy (CFM/Watt)	Airflow (CFM)	Airflow (CFM)	Sound (Sones)	Power (Watts)	Efficacy (CFM/Watt)	Airflow (CFM)
80	< 0.3	6.0	13.3	80	80	0.3	7.3	10.9	80



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

ELECTRICAL
& WEIGHT

Volts	Hz	Amps*	Shipping Weight (lbs.)
120	60	0.7	13.9

* Total connected load

