

PF1500 – Calhoun Series

High-Efficiency Toilet



Product Features

- 1.28 gpf HET, high-efficiency toilet
- Gravity-fed, jetted box rim
- 2" Fully glazed trapway
- High-performance 3" flush valve
- 9" x 7" Water surface
- Close coupled tank with cover
- Quick-connect, two-bolt tank-to-bowl installation
- Brass arm lever available in chrome and white finishes
- Available in round front, elongated and ADA elongated
- Seat and supply not included
- Anti-siphon fill valve
- Sanitary bar on all bowls
- Uses 20% less water than standard low-consumption toilets

Codes and Standards

- ADA (PF1503WH)
- IAPMO/cUPC
- ASME A112.19.2 / CSA B45.1-13
- EPA WaterSense Certified
- MaP tested 1000g
- LEED Compliant

Model Numbers

PF1500WH	Round Front HET Bowl, White
PF1501WH	Elongated HET Bowl, White
PF1502FWH	Elongated, Large Footprint Bowl, White
PF1503WH	ADA Height HET Bowl, White
PF6112WH	1.28 HET Tank w/ 12" RI for PF1500 series
PF6112WHM	1.28 HET Tank w/ 12" RI for PF1500 series-color match lever
PF6110WH	1.28 HET Tank w/ 10" RI for PF1500 series
PF6114WH	1.28 HET Tank w/ 14" RI for PF1500 series
PF6112RWH	1.28 RH Tank w/ 12" RI for PF1500 series



PF1503WH/PF6112WH



PF1500 – Calhoun Series

High-Efficiency Toilet



Product Specification



The combination toilet shall be made of vitreous china. Toilet shall be 1.28 gpf (4.8 lpf). Toilet shall have 2" (5.1cm) fully glazed trapway. Toilet shall include a chrome or white trip lever. Toilet shall be less seat and supply. Toilet shall be ADA compliant (PF1503) with 17" high bowl.

	RF	EL	EL	AD
	PF1500/PF6112	PF1501/PF6112	PF1502F/PF6112	PF1503/PF6112
A	30"	30"	31-1/8"	31-1/2"
B	16-1/2"	18-1/2"	18-1/2"	18-1/2"
C	15-1/2"	15-1/2"	16-1/2"	17"
D	27"	29"	29"	29-1/4"
E	10"	9-7/8"	12"	10"
F	20-5/8"	21-3/8"	25"	21"
G	8"	8"	8"	8"
H	12"	12"	12"	12"

	PF1500/PF6110	PF1501/PF6110	PF1502F/PF6110	PF1503/PF6110
D	26-1/4"	27-7/8"	27-3/4"	28-1/8"
G	6-3/4"	6-3/4"	6-3/4"	6-3/4"
H	10"	10"	10"	10"

	PF1500/PF6114	PF1501/PF6114	PF1502F/PF6114	PF1503/PF6114
D	29-7/8"	31-3/8"	31-1/8"	31-3/8"
G	10-1/4"	10-1/4"	10-1/4"	10-1/4"
H	14"	14"	14"	14"

Note: All dimensions and specifications are nominal and may vary: Dimensions of 8" and greater have a tolerance of +3%. Dimensions less than 8" have a tolerance of +5%.

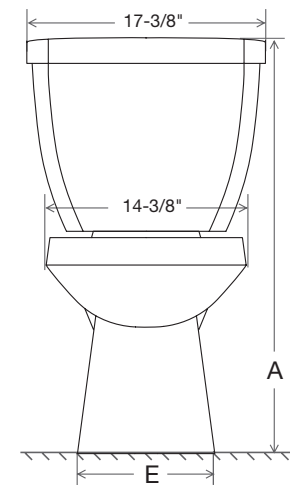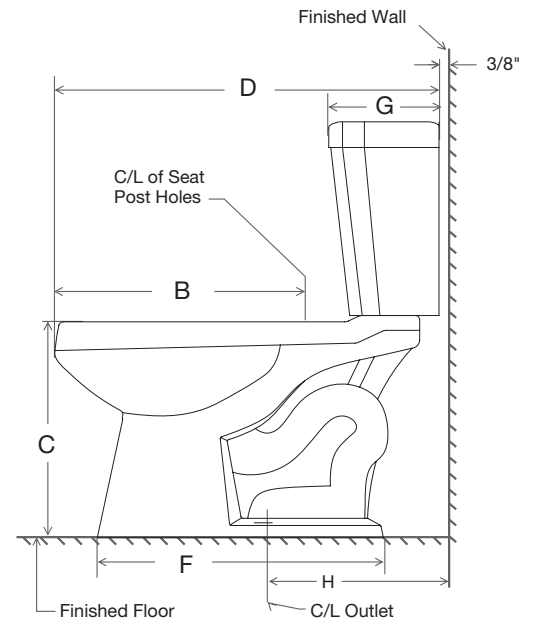

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a limited lifetime warranty on the vitreous china and a 5-year limited warranty on the parts and fittings. This product meets or exceeds ASME/ANSI A112.19.2M. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.

