

Features

- Brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- Pop-up drain with lift rod and tailpiece
- Flexible connections for easy installation
- For 8" (20.3 cm) or 16" (40.6 cm) centers
- Stationary spout
- 5" (12.7 cm) high-arch spout reach
- Available with lever handles
- 1.5 gallons (5.7 liters) per minute maximum flow rate


WIDESPREAD LAVATORY FAUCET K-8215-ZU



Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations
- EPA WaterSense®

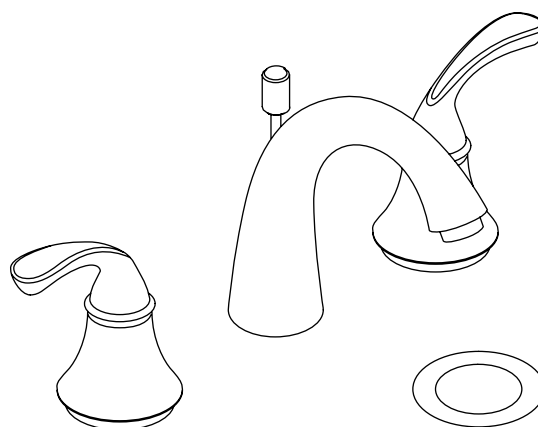

Colors/Finishes

- CP: Polished Chrome

Accessories

- NA: None applicable

Specified Model

Model	Description	Colors/Finishes
K-8215-ZU	Widespread lavatory faucet	<input type="checkbox"/> CP
Optional Accessories		
40003	Wrench for long-stemmed ceramic valve bodies	<input type="checkbox"/> NA
—	Additional flow options are available (refer to the Kohler Price Book)	<input type="checkbox"/> NA

Product Specification


The two-handle widespread lavatory faucet shall be made of brass construction with brass valve bodies. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature reversible quarter-turn washerless ceramic disc valves, flexible connections for easy installation, a 5" (12.7 cm) high-arch spout reach, and a stationary spout. Product shall be for 8" (20.3 cm) or 16" (40.6 cm) centers. Product shall feature a pop-up drain with lift rod and tailpiece. Product shall be available with lever handles. Faucet shall be Kohler Model K-8215-ZU-CP.

TABORET®

Installation Notes

Install this product according to the installation guide.

Valve inlets accommodate 1/2" OD tubing for slip joint connections.

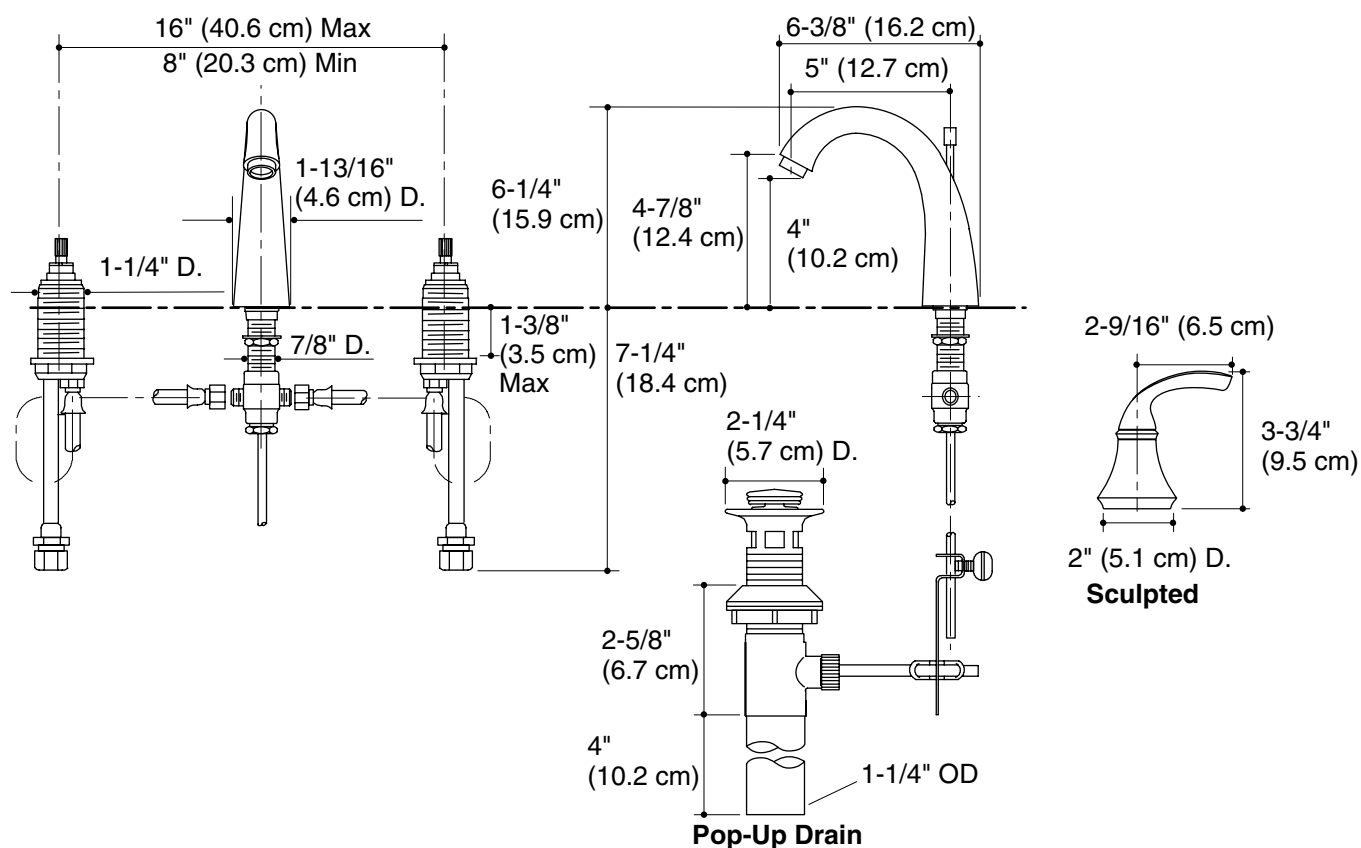

Product Diagram