



36" EURO-STYLE BOTTOM-FREEZER REFRIGERATORS

JB36SSFXRRA, JB36SSFXLRA – 36¹/₄" x 83¹/₈" x 27¹/₄"

PRODUCT DIMENSIONS

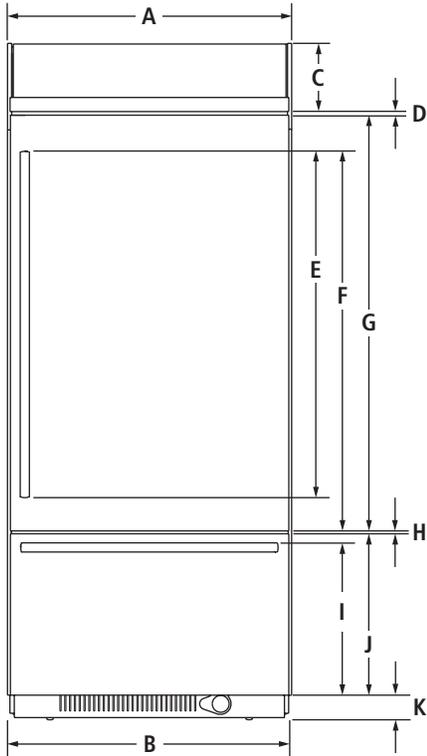

FRONT VIEW

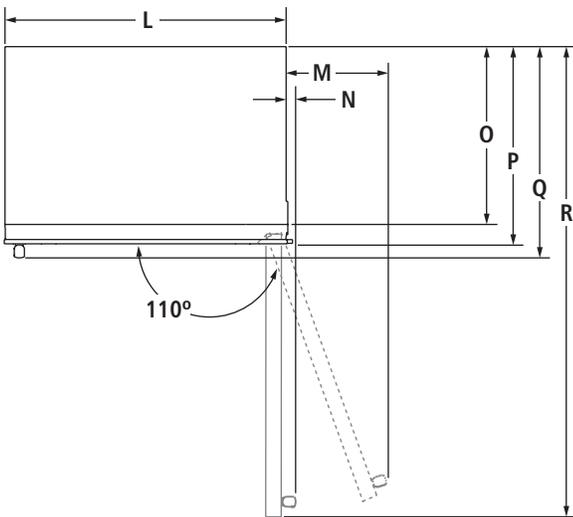


TOP VIEW

MODEL #	JB36SSFXRRA JB36SSFXLRA	
	in	cm
A	Width of door	34 ¹ / ₂ 87.6
B	Overall width	36 ¹ / ₄ 92.1
C	Height of top grille	8 ⁵ / ₈ 21.7
D	Space between door and top grille	⁵ / ₈ 1.6
E	Height of door handle	37 ³ / ₄ 95.9
F	Height to top of door handle	43 ¹ / ₂ 110.5
G	Height of door	49 ³ / ₄ 126.3
H	Space between door and drawer	³ / ₄ 2.0
I	Height to top of drawer handle	19 48.3
J	Height of drawer	20 ⁵ / ₈ 52.4
K	Height of bottom grille	3 ¹ / ₄ 8.3
L	Width of recessed refrigerator	35 88.9
M	Width from side of refrigerator to handle – door fully open 110°	13 ¹ / ₄ 33.7
N	Width from side of refrigerator to handle – door open 90°	2 ¹ / ₄ 5.7
O	Depth without door	23 58.6
P	Depth with door	25 63.6
Q	Depth with handle	27 ¹ / ₄ 69.1
R	Depth with door open 90°	59 149.8

36" EURO-STYLE BOTTOM-FREEZER REFRIGERATORS

JB36SSFARA, JB36SSFALA – 36¹/₄" x 83¹/₈" x 27¹/₄"

DIMENSIONS AS INSTALLED

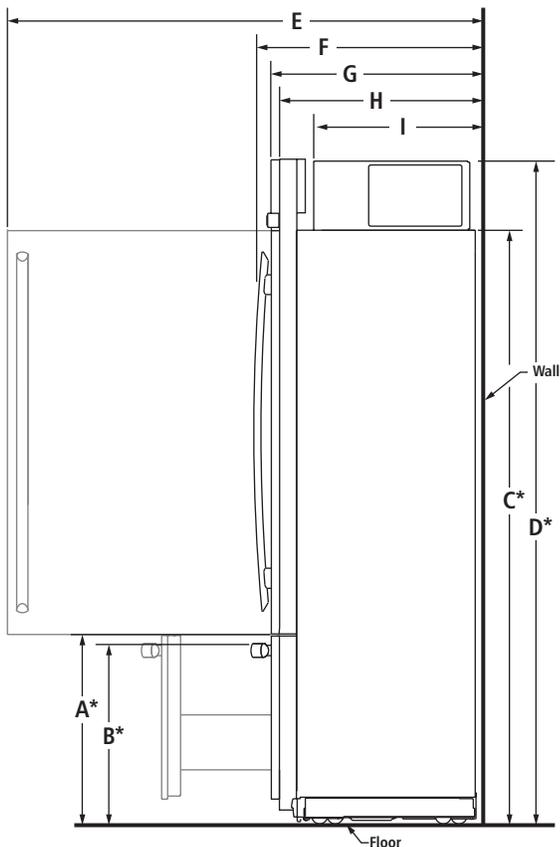

SIDE VIEW


MODEL #	JB36SSFARA JB36SSFALA	
	in	cm
A*	Height to top of drawer (min.)	23 ⁷ / ₈ 60.6
B*	Height to top of drawer handle (min.)	22 ¹ / ₈ 56.2
C*	Height to top of door (min.)	74 ³ / ₈ 189.0
D*	Height of recessed refrigerator (min.)	83 ¹ / ₈ 211.1
E	Depth with door open 90° (min.)	59 149.8
F	Depth with handle (min.)	27 ¹ / ₄ 69.1
G	Depth with door (min.)	25 63.6
H	Depth without door (min.)	23 58.6
I	Depth of compressor (min.)	20 50.8

*Add 1¹/₈" (2.9 cm) to the height dimension when leveling legs are fully extended.


36" EURO-STYLE BOTTOM-FREEZER REFRIGERATORS

JB36SSFXR, JB36SSFXL – 36¹/₄" x 83¹/₈" x 27¹/₄"

OPENING/CLEARANCE DIMENSIONS

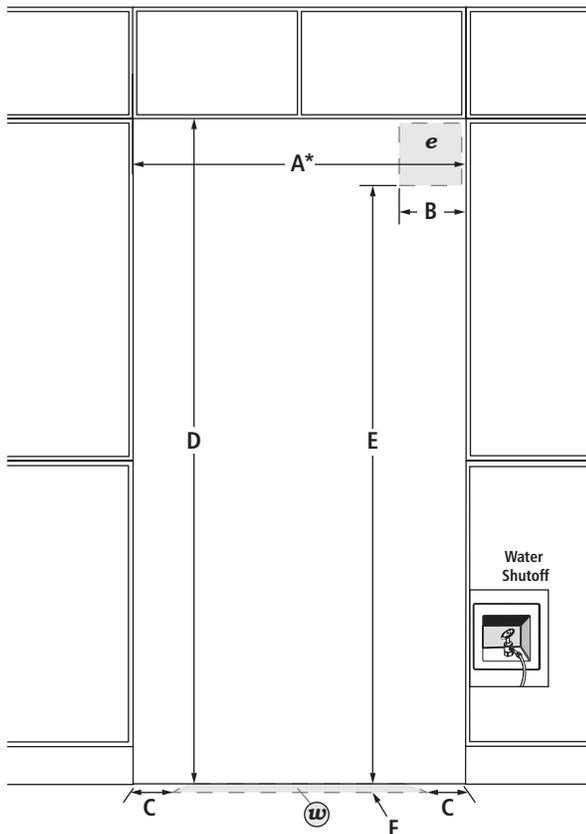

FRONT VIEW

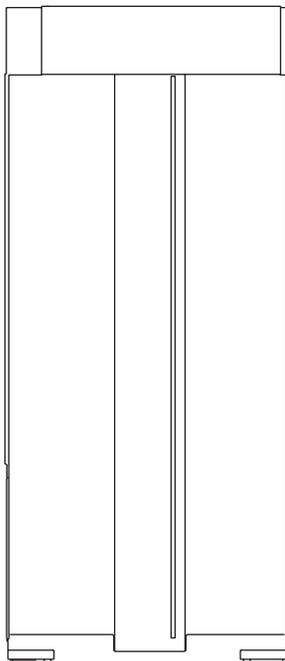

BACK VIEW

MODEL #		JB36SSFXR	
		in	cm
A*	Width (min.)	35 ¹ / ₂	90.2
B	Width of recommended electrical location	4	10.2
C	Distance from side of cabinet to recommended water connection location	6	15.2
D	Height (min.)	83 ¹ / ₂	212.1
E	Height to recommended electrical location	77	195.6
F	Depth of recommended water connection location (max.)	1	2.5
e	Recommended electrical connection location		
w	Recommended water connection location		

*Minimum width must extend behind the face of the cabinet for at least 2" (5.1 cm).

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.