


Pendant

1.0

GENERATION LIGHTING CEILING

SAVE THESE INSTRUCTIONS!

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

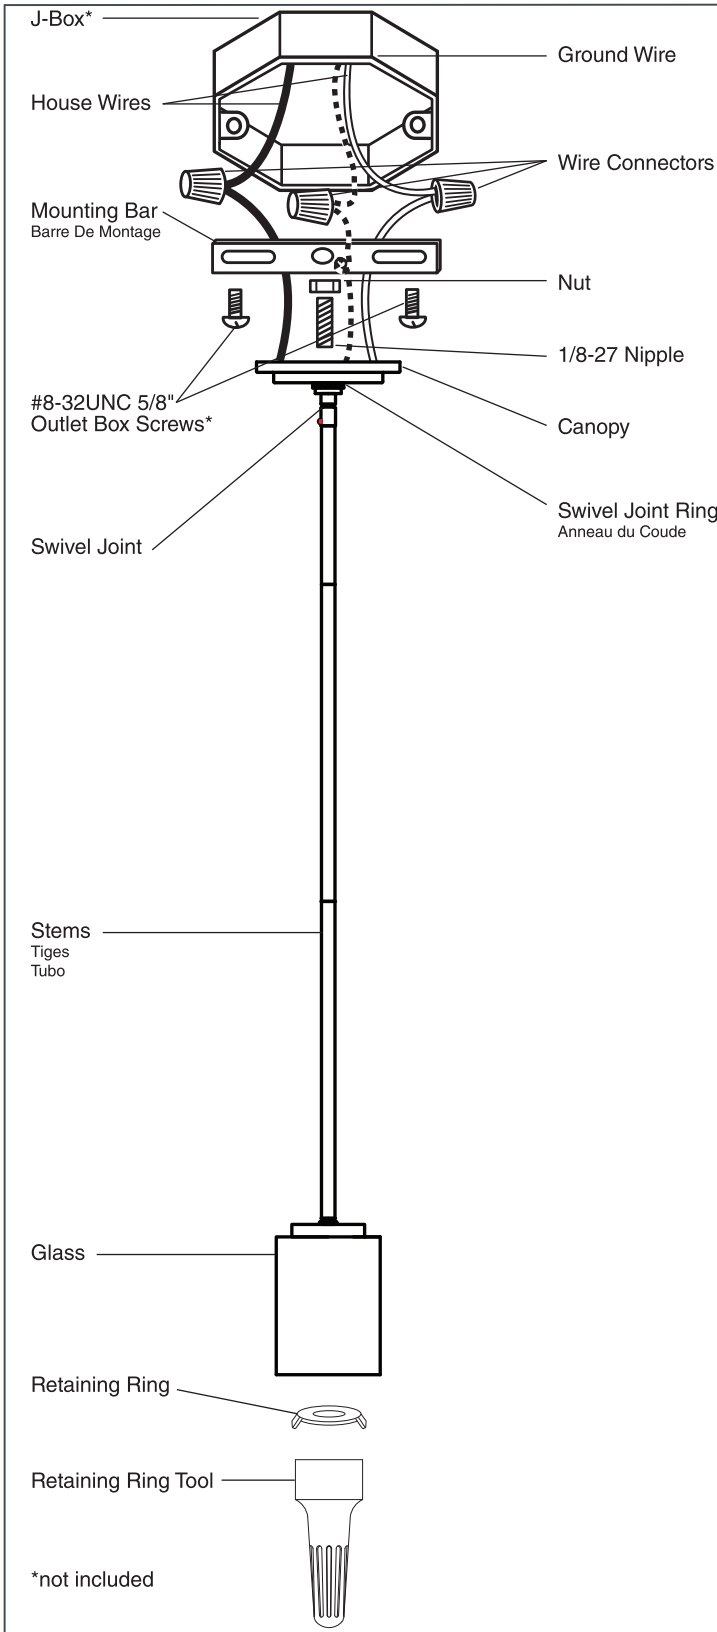

IMPORTANT SAFETY INSTRUCTIONS

- Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.
- Use of other manufacturers components will void warranty, listing and create a potential safety hazard.
- If you are unclear as to how to proceed, contact a qualified electrician.
- You don't need special tools to install this fixture.
- Be sure to follow the steps in the order given.
- Read instructions carefully.

SAVE THESE INSTRUCTIONS

Before You Begin

Carefully remove the fixture from the carton and check that all parts are included, as shown in figure 1. Be careful not to misplace any of the screws or parts which are needed to install this fixture.

Installation

Important: do not attach fixture directly to outlet box.

1. Feed fixture wires through desired amount of rods. Thread rods together to form rod assembly. Thread rod assembly into socket assembly.
2. Secure mounting bar to outlet box with outlet box screws (not supplied). Thread nipple into mounting bar so five threads are exposed and secure with nut. Attach swivel joint to nipple.
3. Slide the canopy ring and canopy, in that order, over rod assembly. Thread rod assembly into swivel joint.
4.
 - A. Use a listed wire connector to connect the fixture hot wire (black wire, or round and smooth tracer) to the supply hot wire.
 - B. Use a listed wire connector to connect the fixture common wire (white wire, or square and rigid) to the supply common wire.
 - C. Gently try to remove the wires from the connector. If you can remove the wires, carefully re-do the wiring connection.
5. **Grounding Instructions:** Connect fixture ground wire (exposed wire) to supply ground wire (bare or green wire) using supplied wire connector.

Final Assembly

Make sure no bare wires can be seen outside wire connectors.

1. After wires are connected, tuck them carefully inside outlet box and then raise the canopy against ceiling and thread the canopy ring to the swivel joint.
2. Raise glass diffuser and place around socket.
3. Raise shade to socket.
4. Secure by threading glass retaining ring onto socket.
5. Install lamp (not supplied).

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com