




# Zurn PEX® XL - Low Lead Brass 1" Barb x 1/2" FPT - QQFSC53GFX Specification Sheet

Tag \_\_\_\_\_

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

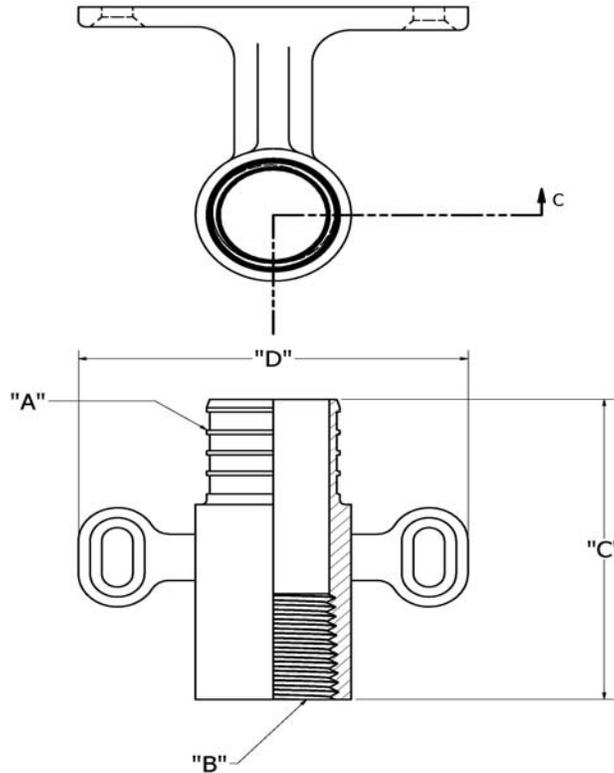

Part Number	Description	'A'	'B'	'C'	'D'
QQFSC53GFX	1" Barb x 1/2" NPT	1" Barb	1/2" NPT - 14	2.27" [57.7]	2.50" [63.5]

**Engineering Specification:** Zurn PEX® XL-Low Lead Brass 1" Barb x 1/2" NPT. The QQFSC53GFX is used to connect 1" Zurn PEX tubing to a sprinkler in multipurpose piping systems. Manufactured from EcoBrass®. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 130 PSI at 120°F (fire protection rating), 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, ASTM F1807, and UL 1821.

#### Accessories

- QCLP5X 1" QuickClamp® Crimp Ring
- QCR5X 1" Copper Crimp Ring

Rev. 0	Date: 09/09/10	CN. No. _
Dwg. No. QFSC53GX	Prod. No. QQFSC53GFX	