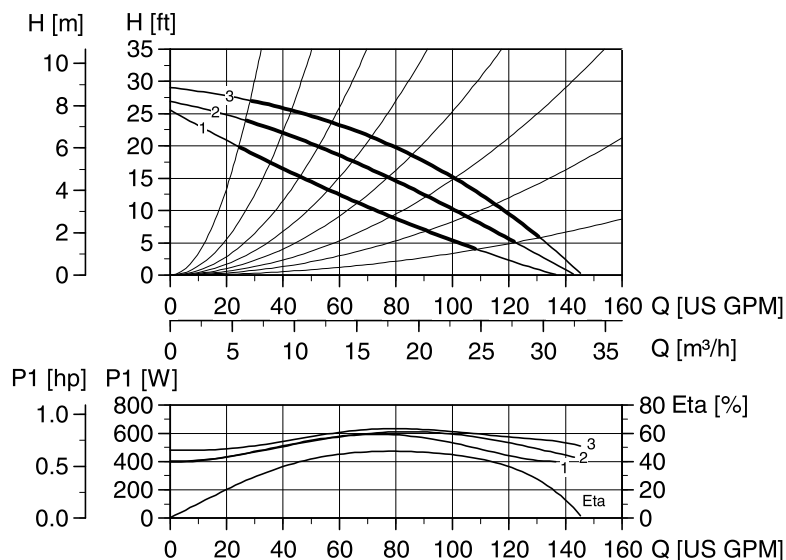
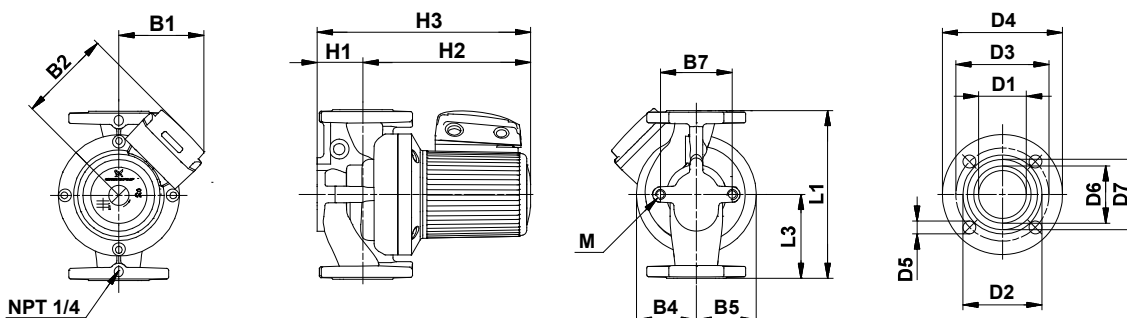


UPS 53-55/57, 1 ph, 115 V, 230 V, 60 Hz


Flow range:	20 - 150 gpm
Head range:	1 - 30 ft
Motor:	4-pole 0.75 Hp
Max. liquid temp (Open):	+140 °F
Max. liquid temp.:	+248 °F
Min. liquid temp.:	+32 °F
Max. system pressure:	145 psi
Net wt:	46.7 lbs (21.2 kg)
Gross wt.:	54.2 lbs (24.6 kg)
Shipping volume:	2.10 ft ³ (0.06 m ³)
Net wt. bronze:	52.2 lbs (23.7 kg)
Gross wt. bronze:	59.7 lbs (27.1 kg)
Shipping volume bronze:	2.10 ft ³ (0.06 m ³)

Note: ETA is calculated as wire-to-water efficiency.


Dimensions

Model		L1	L3	B1	B2	B4	B5	B7	H1	H2	H3	D1	D2	D3	D4	D5	D6	D7	M
UPS 53-55/57	[in]	11.88	5.94	5.31	5.56	3.75	2.94	4.75	2.94	9.88	12.86	2.06	4.19	5.00	6.00	0.63	3.50	4.00	
	[mm]	302	151	135	141	95	75	121	75	251	327	52	106	127	152	16	89	102	M12

Product numbers

Model type	Product number		Voltage [V]
	Cast Iron	Bronze	
UPS 53-55/57 (1 ph)	96654373	96654392	115
	96654374	96654393	230

Connections

Flange size	Flange type
2.0", 2.5", 3.0" non ANSI 4 bolt w/ (4) 0.63" dia. holes	GF 53

Electrical data

Speed	Max amps [A]		P Max [Watts]	Start amps [A]	
	115V	230V		115V	230V
3	5.85	2.95	630	14.60	7.30
2	5.80	2.85	613	14.48	7.18
1	5.70	2.80	600	14.23	7.05