



UPS 75-69/2, 3 ph, 208-230 V, 460 V, 575 V★, 60 Hz

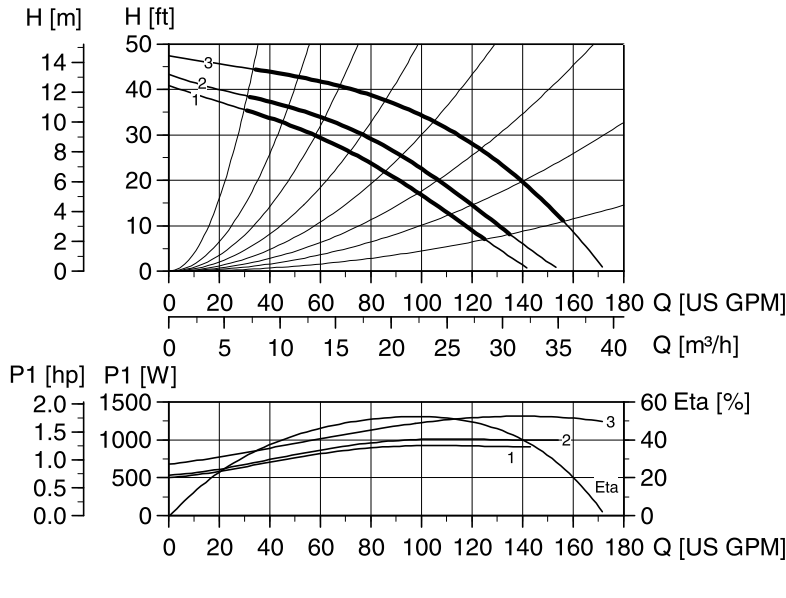

Flow range:	20 - 170 gpm
Head range:	1 - 46 ft
Motor:	2-pole 1.25 Hp
Max. liquid temp (Open):	+140 °F
Max. liquid temp.:	+248 °F
Min. liquid temp.:	+32 °F
Max. system pressure:	145 psi
Net wt:	53.6 lbs (24.3 kg)
Gross wt.:	65.7 lbs (29.8 kg)
Shipping volume:	3.50 ft³ (0.098 m³)
Net wt. bronze:	68.3 lbs (31.0 kg)
Gross wt. bronze:	80.5 lbs (36.5 kg)
Shipping volume bronze:	3.50 ft³ (0.098 m³)

Note: ETA is calculated as wire-to-water efficiency.

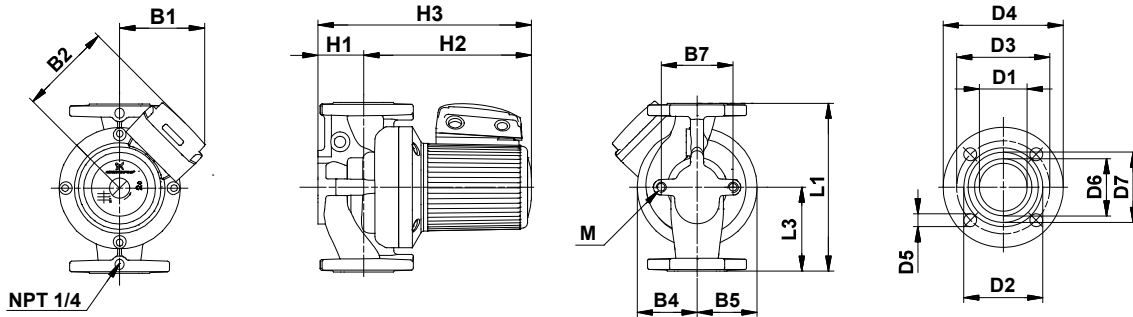

Dimensions

Model		L1	L3	B1	B2	B4	B5	B7	H1	H2	H3	D1	D2	D3	D4	D5	D6	D7	M
UPS 75-69/2	[in]	14.25	7.13	5.69	6.68	3.94	3.94	4.50	2.94	10.81	13.78	2.94	4.31	6.00	7.50	0.75	6.50	4.00	
	[mm]	362	181	145	170	100	100	114	75	275	350	75	109	152	191	19	165	102	M12

Product numbers

Model type	Product number		Voltage [V]
	Cast Iron	Bronze	
UPS 75-69/2 (3 ph)	96654379	96654398	208-230
	96654390	96654399	460
	96654391	96654400	575★

Connections

Flange size	Flange type
3" ANSI 125# R.F.	GF80

Electrical data

Speed	Max amps [A]			P Max [Watts]	Start amps [A]		
	208-230V	460V	575V★		208-230V	460V	575V★
3	4.00	2.00	1.60	1300	22.80	11.40	9.12
2	3.00	1.50	1.20	1000	17.10	8.55	6.84
1	2.75	▲	▲	950	15.68	▲	▲

▲ All 3-phase, 460V and 575V pumps are 2-speed only.
★ Canada only.