CODE NUMBER

3250385

DESCRIPTION

1.6 gpf, Polished Chrome Finish, Fixture Connection , Single Flush, G2 Exposed Sensor Water Closet Flushometer.

DETAILS

- Flush Volume: 1.6 gpf (6.0 Lpf)
- Finish: Polished Chrome (CP)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet

FEATURES

- PERMEX® Synthetic Rubber Dual Filtered Flex Tube Diaphragm designed for improved life and reduced maintenance
- ADA Compliant Electronic Single Flush Line Powered Infrared Sensor or Automatic "No Hands" operation
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Latching Solenoid Operator
- Engineered Metal Cover with replaceable Lens Window
- User friendly three (3) second Flush Delay
- Courtesy Flush® Override Button
- Line Powered with 6 VAC Step Down Transformer
- Infrared Sensor Range Adjustment Screw
- Initial Set-up Range Indicator Light (first 10 minutes)
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Free Spinning, Vandal Resistant Stop Cap
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker Flush Connection with One-piece Bottom Hex Coupling Nut
- Spud Coupling and Flange for 1⅝" Top Spud
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange with Set Screw
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID™ Technology
- Diaphragm, Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine resistance

COMPLIANCES & CERTIFICATIONS

(ADA Compliant, BAA Compliant, cUPC Certified, UL Certified)

DOWNLOADS

- ECOS Single Flush HW Flushometer and Retrofit
- ECOS HW Repair and Maintenance Guide
- G2 Repair and Maintenance Guide
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the G2 111 HW product? View the general spec sheet with all options.

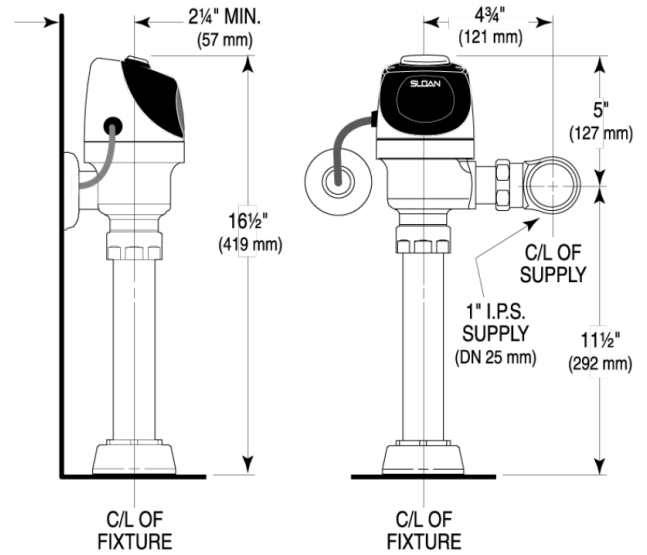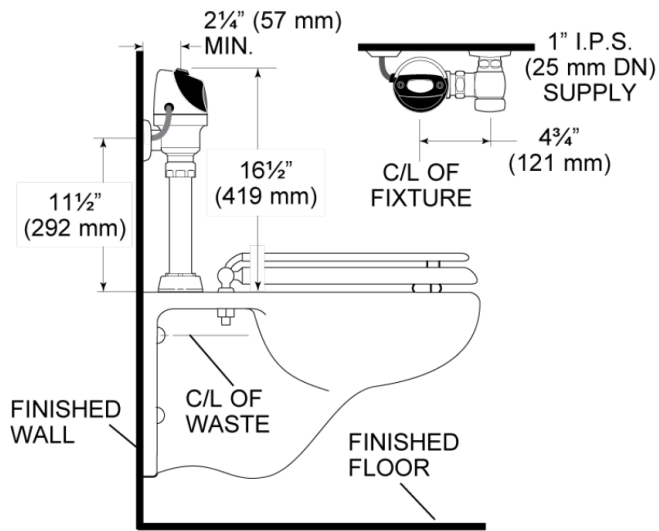Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.

ROUGH-IN

2¼" (57 mm) MIN.

1" I.P.S. (25 mm DN) SUPPLY

4¾" (121 mm)

C/L OF FIXTURE

11½" (292 mm)

16½" (419 mm)

FINISHED WALL

C/L OF WASTE

FINISHED FLOOR

2¼" MIN. (57 mm)

16½" (419 mm)

C/L OF FIXTURE

4¾" (121 mm)

5" (127 mm)

C/L OF SUPPLY

1" I.P.S. SUPPLY (DN 25 mm)

11½" (292 mm)

C/L OF FIXTURE