


# SUBMITTAL DATA SHEET

## NL Ball Style Meter Stop – 76100MWQ


Q CTS Compression x Meter



DRAWING MAY NOT RESEMBLE ACTUAL VALVE CONFIGURATION

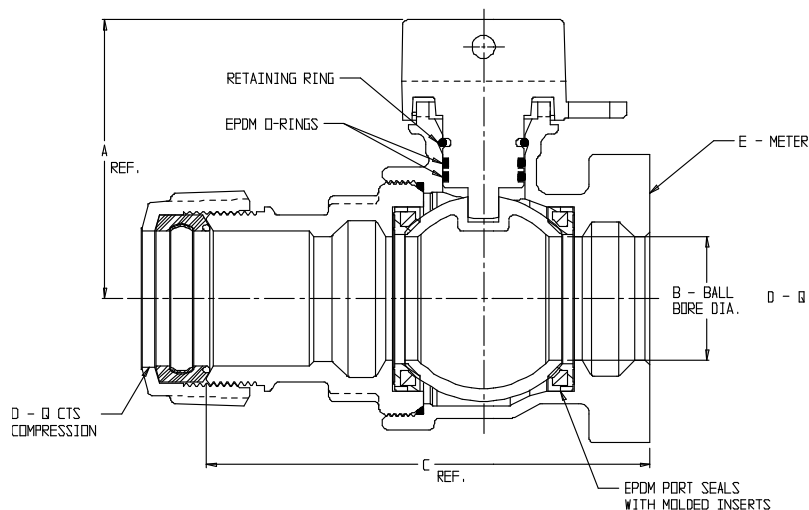

| MODEL    | SIZE  | A    | B    | C    | D     | E          |
|----------|-------|------|------|------|-------|------------|
| 76100MWQ | 1 1/2 | 3.40 | 1.50 | 5.40 | 1 1/2 | 1 1/2      |
| 76100MWQ | 2     | 3.71 | 2.00 | 6.55 | 2     | 1 1/2 OR 2 |

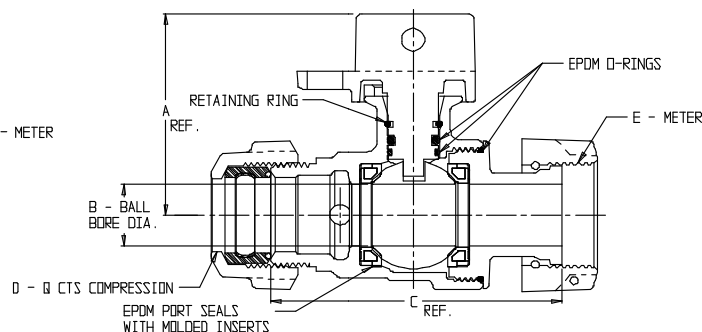

| MODEL    | SIZE                   | A    | B    | C    | D   | E              |
|----------|------------------------|------|------|------|-----|----------------|
| 76100MWQ | 3/4 X 5/8 X 5/8        | 2.31 | .63  | 3.28 | 3/4 | 5/8            |
| 76100MWQ | 3/4 X 3/4 X 5/8        | 2.42 | .75  | 3.67 | 3/4 | 5/8            |
| 76100MWQ | 1 X 3/4 X 5/8          | 2.42 | .75  | 3.71 | 1   | 5/8            |
| 76100MWQ | 3/4 X 5/8 X 3/4 X 3.56 | 2.31 | .63  | 3.56 | 3/4 | 5/8 X 3/4, 3/4 |
| 76100MWQ | 3/4 X 5/8 X 3/4 X 3.75 | 2.31 | .63  | 3.75 | 3/4 | 5/8 X 3/4, 3/4 |
| 76100MWQ | 3/4 X 5/8 X 3/4 X 3.88 | 2.31 | .63  | 3.88 | 3/4 | 5/8 X 3/4, 3/4 |
| 76100MWQ | 3/4 X 5/8 X 3/4        | 2.31 | .63  | 3.30 | 3/4 | 5/8 X 3/4, 3/4 |
| 76100MWQ | 3/4                    | 2.42 | .75  | 3.51 | 3/4 | 5/8 X 3/4, 3/4 |
| 76100MWQ | 1 X 5/8 X 3/4          | 2.31 | .63  | 4.22 | 1   | 5/8 X 3/4, 3/4 |
| 76100MWQ | 1 X 3/4 X 3/4          | 2.42 | .75  | 3.55 | 1   | 5/8 X 3/4, 3/4 |
| 76100MWQ | 1 X 3/4 X 1            | 2.42 | .75  | 3.65 | 1   | 1              |
| 76100MWQ | 1                      | 2.64 | 1.00 | 4.47 | 1   | 1              |
| 76100MWQ | 1 X 4.72               | 2.64 | 1.00 | 4.72 | 1   | 1              |

### SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Rated for 300 PSIG water pressure
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections



**A.Y. McDonald Mfg. Co.**  
P.O. Box 508  
Dubuque, IA 52004-508

**Toll Free: 1-800-292-2737**  
**Fax: 1-800-832-9296**  
**Hours: 7:00 a.m. – 5:00 p.m., CST**

[sales@aymcdonald.com](mailto:sales@aymcdonald.com)  
[www.aymcdonald.com](http://www.aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**