


MAINGUARD #7500 4" BLOW-OFF

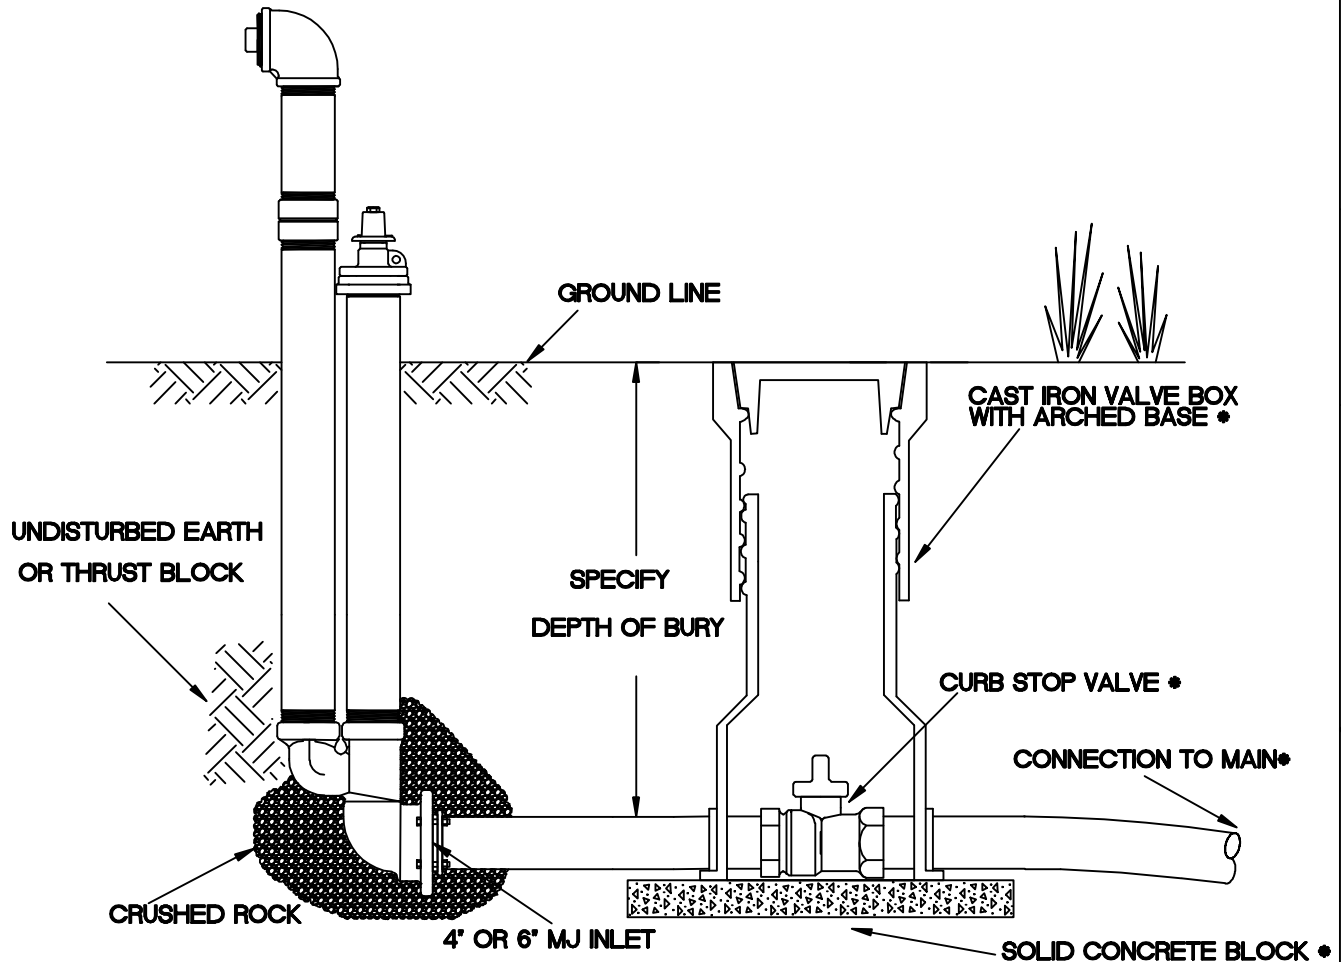

BLOW-OFFS SHALL BE NON-FREEZING, SELF DRAINING TYPE WITH A _____' DEPTH OF BURY. BLOW-OFFS WILL BE FURNISHED WITH A 4' OR 6' MJ INLET, A NON-TURNING OPERATING ROD AND SHALL OPEN TO THE LEFT. THE OPERATING DRIVE MECHANISM SHALL BE OF BRONZE-TO-BRONZE DESIGN WITH AN ALUMINUM PLUNGER AND BE SERVICEABLE FROM ABOVE GRADE WITH NO DIGGING. UNITS SHALL OPERATE WITH A STANDARD 2' GATE VALVE WRENCH. WHEN OPEN, VALVE SHALL BE 100% UNOBSTRUCTED AND DRAIN HOLE SHALL BE COVERED. THE OUTLET SHALL BE 4" FIP WITH PLUG AND EXTEND A MINIMUM OF 12' ABOVE THE GROUND, AS MANUFACTURED BY KUPFERLE FOUNDRY CO., ST. LOUIS, MO. MODEL #7500, OR APPROVED EQUAL


• - BY OTHERS

DATE	REVISION

THIS DRAWING IS THE PROPERTY OF THE KUPFERLE FOUNDRY COMPANY. IT IS NOT TO BE USED OR DUPLICATED WITHOUT PERMISSION OF THE OWNER.	
#7500 ECLIPSE BLOW-OFF HYDRANT	SHEET OF

DRAWN	F.M.
APPROVED	
DATE	2-5-13
MAT'L	

ECLIPSE
Since 1867



KUPFERLE FOUNDRY COMPANY

2511 NORTH 9TH STREET, ST. LOUIS, MO 63102
314-231-8738 800-231-3990 FAX 314-231-2820
<http://www.hydrants.com>