


## INTEGRAL POWER EXHAUST FOR ECONOMIZER (FIELD INSTALLED ONLY)

**AXRX-BGF04C—RKPN- 3-5 Ton [10.6-17.6 kW] Models**  
208/230 V, 1PH and 3PH, 60 Hz

**AXRX-BGF04D—RKPN 3-5 Ton [10.6-17.6 kW] Models**  
460 V, 3PH, 60 Hz

**AXRX-BGF04Y—RKPN 3-5 Ton [10.6-17.6 kW] Models**  
575V, 3PH, 60 Hz

- For **Honeywell** economizer.
- Downflow or horizontal applications.
- Requires separate 208-230 volt – 1 PH power supply with disconnect or requires separate 460V - 1 PH power supply with disconnect.
- Adjustable switch on economizer, factory preset to energize power exhaust at 95% outside air position.
- Polarized plug connects power exhaust relay to economizer.

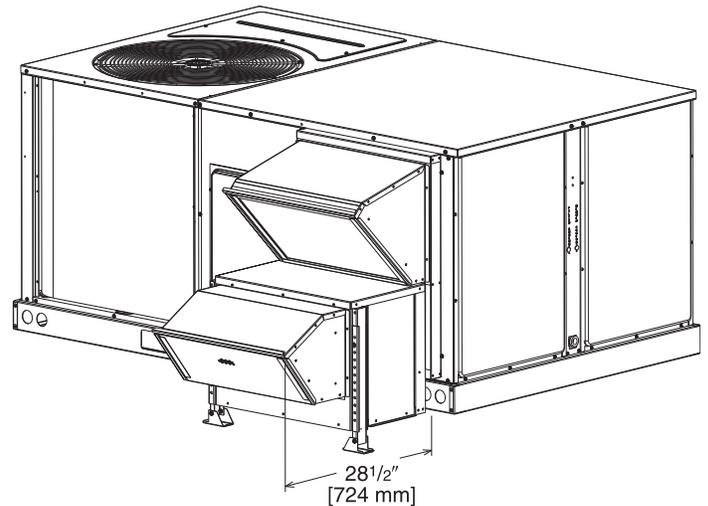

## POWER EXHAUST KIT FOR AXRD-01REC(-) ECONOMIZERS

Model No.	No. of Fans	Volts	Phase	Watts (ea.)	High Speed		FLA (ea.)	LRA (ea.)
					CFM ①	RPM		
AXRX-BGF04C	1	208-230	1	1000	2500	1725	4.4	23.7
AXRX-BGF04D	1	460	1	800	2370	1620	1.8	4.1
AXRX-BGF04Y	1	575	1	800	2370	1620	1.5	3.3

① CFM is at 0" W.C. external static pressure.



## FRESH AIR DAMPER

**RKPN 3-5 Ton [10.6-17.6 kW] Models**

**RKQN 3-5 Ton [10.6-17.6 kW] Models**

AXRF-FBA1 (Manual)

AXRF-FBB1 (Motorized)

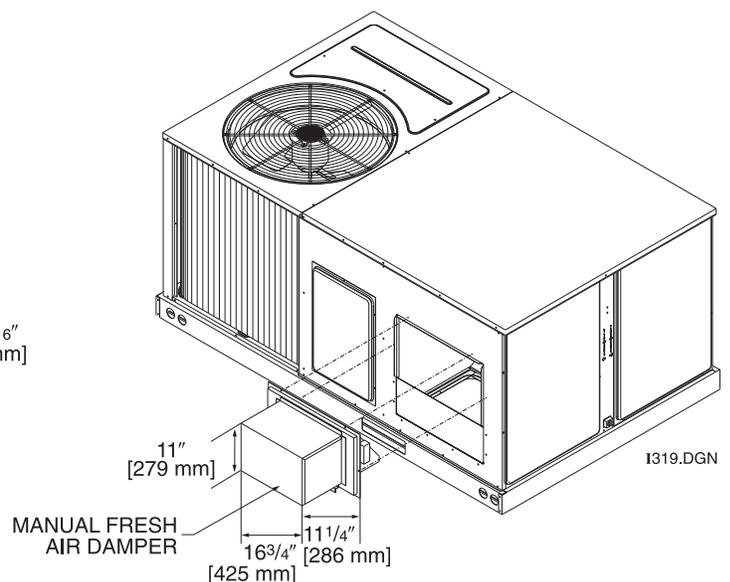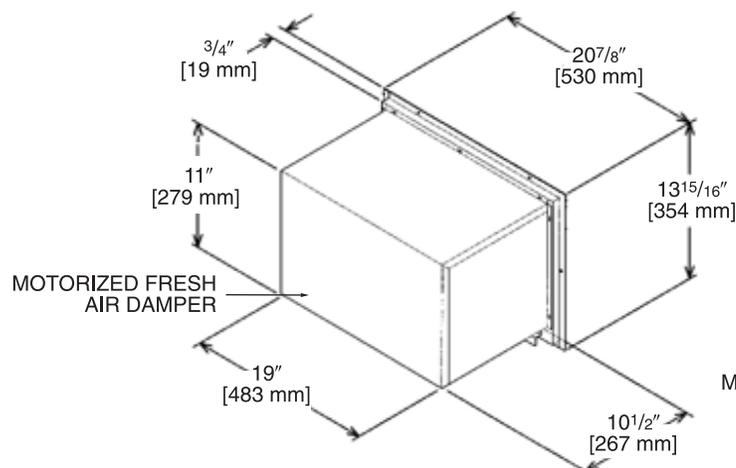

[ ] Designates Metric Conversions