

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:


Contractor:

G2PS14X 1/4 Turn Push Connect Straight Stop - Compression Outlet

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop.

Design Features:

- Compatible with PEX, copper, and CPVC.
- Pre-inserted tube stiffener is "installation ready" for a faster connection
- Compact machined one-piece body design
- Fast, reliable, secure
- Smooth 1/4 turn operation
- 100% leak tested

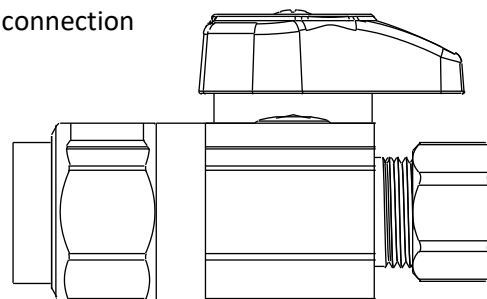

Operating Specifications:

Temperature: 40° - 160° F

Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS


Body	Brass, plated
Stem Barrel	TPE
Stem Shaft	Glass-filled polypropylene
Stem O-ring	EPDM
Gripper Ring	Stainless steel
Push connect O-ring	EPDM
Tube Stiffener	POM
Removal Collet	Glass-filled nylon
Handle	ABS, plated or zinc die cast, plated
Screw	Steel, zinc plated
Compression Nut & Sleeve	Brass

PART DIMENSIONS (Inches)

Model	DIM. A	DIM. B
G2PS14X	1.03	2.45

Part Listing:

- ☐ G2PS14X C 1/2" nom push connect x 3/8" OD compression, chrome plated

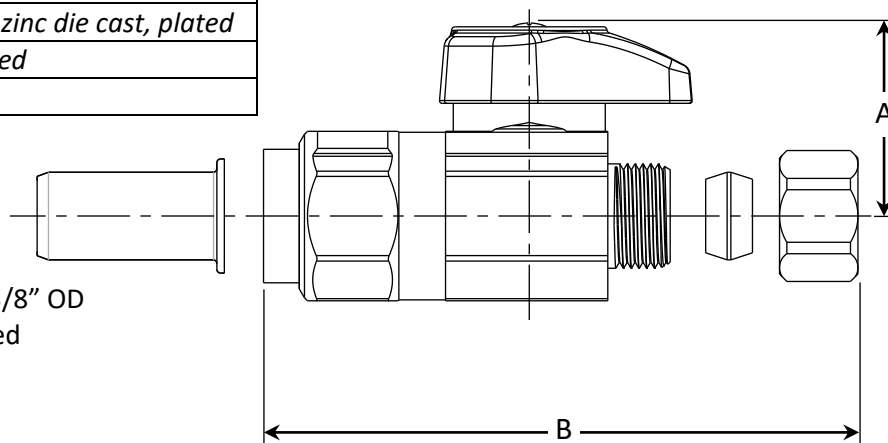

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.93 G2PS14X 1/4 Turn Push Connect Straight Stop - Comp Outlet REV 3.20

BrassCraft®

©2020 Brasscraft Manufacturing Company