

# PFSH304G SHOWER HEAD



## Product Features

- Brass and ABS construction
- 1/2" connection
- 3-Function showerhead  
(Full spray, massage, spray+massage)
- Max. flow rate 1.5 gpm (5.7 L/min) at 80 psi



## Codes and Certifications



- Certified to ASME A112.18.1 / CSA B125.1
- cUPC/ CSA listed
- EPA WaterSense certified



**PFSH304GCP**

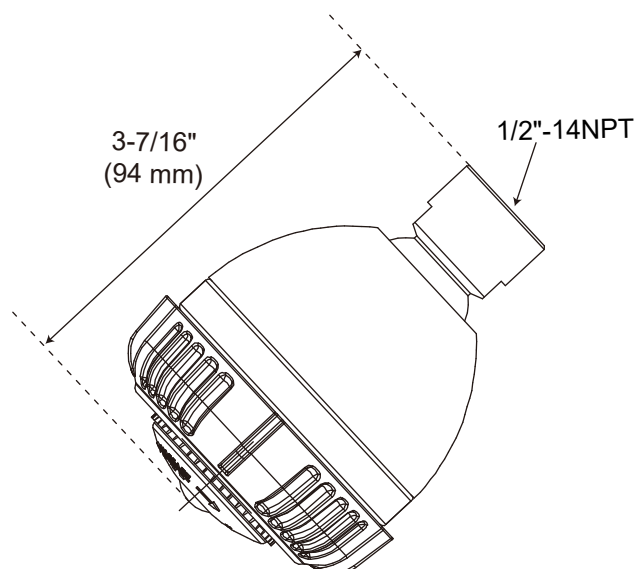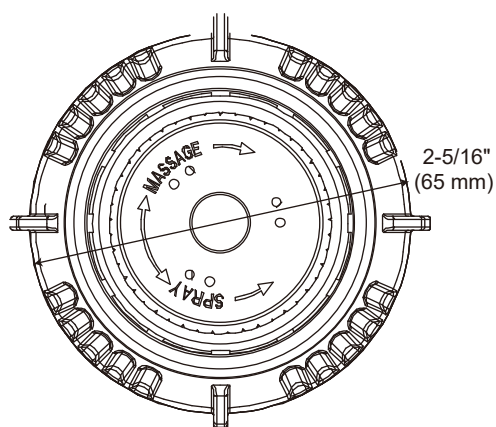

For detailed warranty information, visit [ferguson.com/proflo-faucet-warranty](https://ferguson.com/proflo-faucet-warranty).