



Bellwether®
5.5' BubbleMassage™ Bath
K-860-H2

Features

- Integral flange.
- Right drain.
- Integral apron.
- Integral lumbar support.
- 66" (1676 mm) x 32" (813 mm) x 16-1/2" (419 mm)

Material

- Cast iron with Safeguard® finish.

Hydrotherapy

- Six fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Built-in 1500 W heater.
- Lighted keypad control.

Installation

- Alcove

Required Accessories

K- 9696 Whirlpool 6-Jet Trim Kit

Recommended Accessories

K- 1703 Whirlpool Remote Control
K- 37380 30" Rough-in Cable Bath Drain
K- 37383 30" Rough-in Cable Bath Drain
K- 7259 Clearflo Bath Drain
K- 9497 2-1/2" Keypad Trim



ADA

Codes/Standards

ASME A112.19.1/CSA B45.2
ASME A112.19.7/CSA B45.10
ASTM F462
UL 1795
CSA C22.2 No. 218.2
ADA
ICC/ANSI A117.1
CARB P2



KOHLER® Lifetime Limited Warranty for Cast Iron Components

See website for detailed warranty information.


Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|--|----|---------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 47 | Almond |
|  | NY | Dune |
|  | G9 | Sandbar |

No change in measurement if connected with drain illustrated. (K-7259)

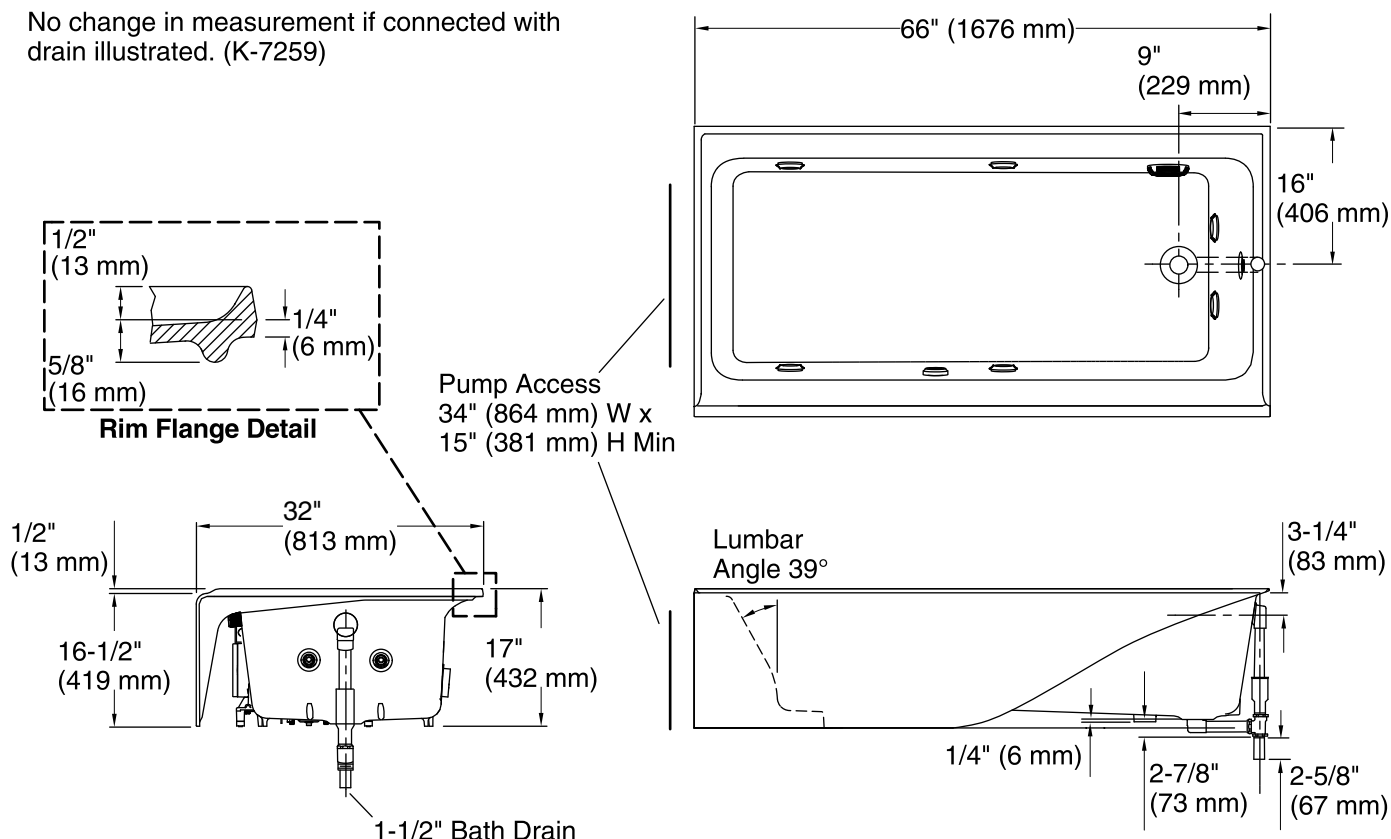

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heater: 240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove
Drain location: Right
Basin area, bottom: 50-3/4" x 20-5/16" (1289 mm x 516 mm)
Basin area, top: 58-7/16" x 22-5/8" (1484 mm x 575 mm)
Weight: 470 lbs (213.2 kg)
Minimum floor load: 61.6 lbs/ft² (300.8 kg/m²)
Water depth: 11-11/16" (297 mm)
Water capacity: 49 gal (185.5 L)
Electrical component rating: Pump: 240 V, 11 A, 50/60 Hz
Heater: 240 V, 6 A, 1500 W
Pump speed: Variable

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

ADA compliant when installed to the specific requirements of these regulations.