

Sentinel Mark II® Anti-Scald Balanced Pressure Exposed Shower

FEATURES:

- Brass body construction
- (2) 1/2" -14 NPTF inlets
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves
- Brass lever handle
- Adjustable temperature limit stop to control maximum temperature setting
- Supports back-to-back installation
- Vandal-resistant
- Included shower head: S-2272-E2 2.0 GPM (7.6 L/min) flow rate
- Galvanized steel gooseneck with supporting strap

SHOWER OPTIONS:

- LH: Less shower head


STANDARDS:

- ASSE 1016 certified
- ASME A112.18.1/CSA B125.1 certified
- WaterSense certified (S-2272-E2 showerhead)

WARRANTY:

Visit www.speakman.com for full product warranty information

- 5 Year Limited Warranty (commercial)
- 5 Year Limited Warranty (residential)

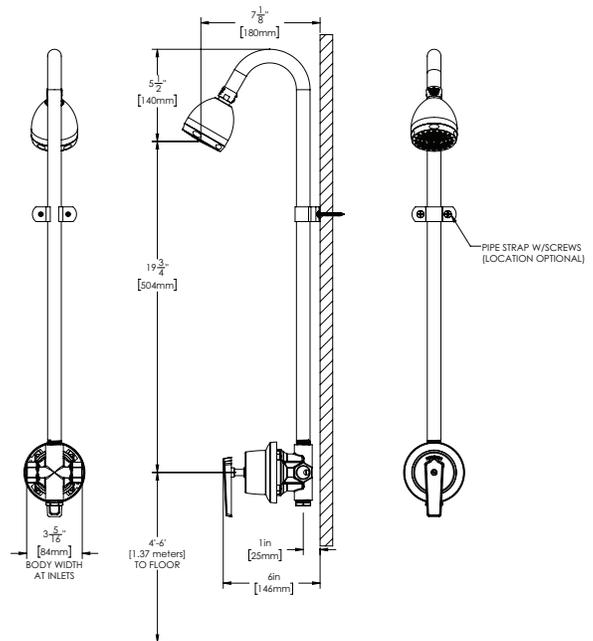

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 01-JUNE 2018