

Schedule 40 Fittings Technical Schedule 40 Fittings Dimensions & Information



Injection Molded Dimension References:

- G** = (LAYING LENGTH) Intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; $\pm 1/32$ inch.
- H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses; $\pm 1/32$ inch.
- J** = Intersection of center lines to bottom of socket/thread; 45° elbows; $\pm 1/32$ inch


- L** = Overall length of fittings; $\pm 1/16$ inch.
- M** = Outside diameter of socket/thread hub; $\pm 1/16$ inch.
- N** = Socket bottom to socket bottom; couplings; $\pm 1/16$ inch.
- W** = Height of cap; $\pm 1/16$ inch.

Fabricated Dimension References:

- G** = (LAYING LENGTH) Intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; $\pm 1/4$ inch; 14" & larger $\pm 1/2$ inch.
- H** = Intersection of center lines to face of fitting; 90° elbows $\pm 1/4$ inch, 14" & larger $\pm 3/4$ inch; wyes $\pm 1/2$ inch; tees, crosses $\pm 1/4$ inch; 14" larger $\pm 1/2$ inch.
- J** = Intersection of center lines to bottom of socket/thread; 45° elbows; $\pm 1/4$ inch; 14" & larger $\pm 1/2$ inch.


- L** = Overall length of fittings; $\pm 1/2$ inch.; wyes ± 1 inch; 14" & larger ± 1 inch.
- M** = Outside diameter of socket/thread hub; $\pm 1/4$ inch.
- N** = Socket bottom to socket bottom; couplings; $\pm 1/2$ inch.
- W** = Height of cap; $\pm 1/4$ inch.

Typical Fabricated Dimension References

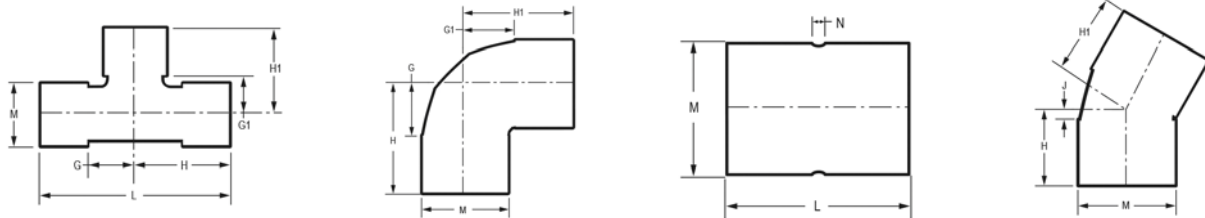

Tee

Socket x Socket x Socket




Part Number	Size	G	G1	H	H1	L	M	Approx. Wt. (Lbs.)
401-003	3/8	3/8	3/8	1- 1/8	1- 1/8	2- 1/4	31/32	.03
401-005	1/2	1/2	1/2	1- 1/4	1- 1/4	2- 1/2	1- 3/32	.06
401-007	3/4	9/16	9/16	1- 9/16	1- 9/16	3- 1/8	1- 5/16	.09
401-010	1	11/16	11/16	1- 3/4	1- 3/4	3- 1/2	1- 5/8	.15
401-012	1-1/4	7/8	7/8	2- 1/8	2- 1/8	4- 1/4	2	.25
401-015	1-1/2	1-1/8	1-1/8	2-3/8	2-3/8	4-3/4	2- 1/4	.33
401-020	2	1- 3/8	1- 3/8	2- 3/4	2- 3/4	5- 1/2	2- 3/4	.50
401-025	2-1/2	1-21/32	1-21/32	3-13/32	3-13/32	6-13/16	3-11/32	.96
401-030	3	1-15/16	1-15/16	3-27/32	3-27/32	7-11/16	4	1.44
401-040	4	2-13/32	2-13/32	4- 7/16	4- 7/16	8- 7/8	5- 1/32	2.34
401-050	5	3	3	6	6	12	6- 5/32	4.58
401-060	6	3- 5/8	3- 5/8	6-21/32	6-21/32	13- 5/16	7- 9/32	5.89
401-080	8	4- 1/2	4- 1/2	8-17/32	8-17/32	17- 1/16	9- 3/8	11.57
401-100	10	5-13/16	5-13/16	10-27/32	10-27/32	21-11/16	11-21/32	24.00
401-100F*	10	9- 7/8	9- 3/8	15- 1/8	14- 5/8	30- 1/4	11- 1/2	36.41
401-120	12	6-27/32	6-27/32	12-27/32	12-27/32	25-11/16	13- 3/4	37.29



Schedule 40 Fittings Technical
Schedule 40 Fittings Dimensions & Information

Reducer Bushing - Special Reinforced Flush Style


Mipt X SR Fipt - Stainless Steel Collar



Part Number	Size	L	N	Approx. Wt. (Lbs.)
439-209SR	1-1/2X1/2	1-11/32	19/32	.12
439-210SR	1-1/2X3/4	1-11/32	19/32	.12
439-247SR	2X1/2	1-3/8	21/32	.17
439-248SR	2X3/4	1- 3/8	5/8	.18
439-249SR	2X1	1- 3/8	15/32	.19
439-420SR	4X2	2- 1/8	1- 1/8	.86

Cap

Socket



Part Number	Size	M	W	Approx. Wt. (Lbs.)
447-003	3/8	7/8	1	.01
447-005	1/2	1- 3/32	1- 1/16	.02
447-007	3/4	1- 5/16	1-5/16	.03
447-010	1	1-19/32	1-5/8	.06
447-012	1-1/4	1-31/32	1- 3/4	.09
447-015	1-1/2	2- 1/4	1-29/32	.11
447-020	2	2-23/32	2- 1/32	.17
447-025	2-1/2	3- 5/16	2- 9/16	.32
447-030	3	4	3-3/8	.49
447-040	4	5-1/32	3-13/32	.77
447-045F*	4-1/2	5- 7/16	3- 5/8	.88
447-050	5	6- 1/8	4-11/16	1.42
447-060	6	7- 1/4	5-1/2	2.50
447-080	8	9-3/8	6-31/32	4.59
447-100F*	10	11-13/16	5- 1/4	5.70
447-120F*	12	13- 7/8	6- 7/8	8.09
447-140F*	14	15	7- 3/8	10.21
447-160F*	16	17- 1/16	9	14.03
447-180F*	18	19- 1/8	9	18.92
447-200F*	20	21- 3/16	12- 1/4	29.85
447-240F*	24	25- 5/16	14- 1/8	41.68

* Fabricated