



Schedule 80 PVC Technical Schedule 80 Fittings

Injection Molded Dimension References:

- G** = (LAYING LENGTH) Intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.
- H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.
- J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch


- L** = Overall length of fittings; ± 1/16 inch.
- M** = Outside diameter of socket/thread hub; ± 1/16 inch.
- N** = Socket bottom to socket bottom; couplings; ± 1/16 inch.
- W** = Height of cap; ± 1/16 inch.

Fabricated Dimension References:

- G** = (LAYING LENGTH) Intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/4 inch; 14" & larger ± 1/2 inch.
- H** = Intersection of center lines to face of fitting; 90° elbows ± 1/4 inch, 14" & larger ± 3/4 inch; wyes ± 1/2 inch; tees, crosses ± 1/4 inch; 14" larger ± 1/2 inch.
- J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/4 inch; 14" & larger ± 1/2 inch.


- L** = Overall length of fittings; ± 1/2 inch.; wyes ± 1 inch; 14" & larger ± 1 inch.
- M** = Outside diameter of socket/thread hub; ± 1/4 inch.
- N** = Socket bottom to socket bottom; couplings; ± 1/2 inch.
- W** = Height of cap; ± 1/4 inch.

Typical Fabricated Dimension References

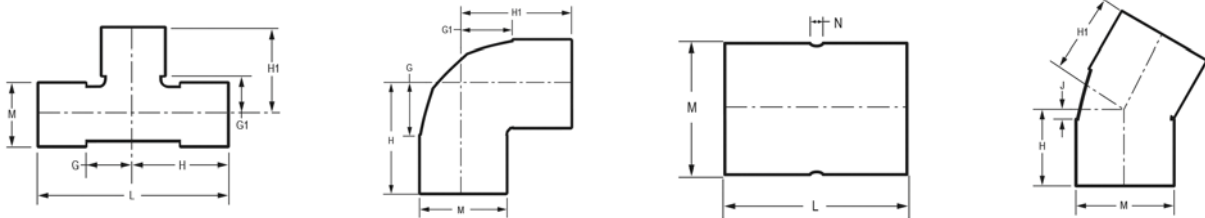

Tee

Socket x Socket x Socket



Part Number	Size	G	G1	H	H1	L	M	Approx. Wt. (Lbs.)
801-002	1/4	11/32	11/32	31/32	31/32	1-31/32	27/32	.03
801-003	3/8	15/32	15/32	1- 1/4	1- 1/4	2- 1/2	31/32	.06
801-005	1/2	19/32	19/32	1-15/32	1-15/32	2-15/16	1- 3/16	.10
801-007	3/4	11/16	11/16	1-11/16	1-11/16	3- 3/8	1-13/32	.15
801-010	1	7/8	7/8	2	2	4	1-23/32	.25
801-012	1-1/4	1- 1/32	1- 1/32	2- 9/32	2- 9/32	4-9/16	2- 3/32	.39
801-015	1-1/2	1- 3/16	1- 3/16	2- 9/16	2- 9/16	5- 1/8	2- 3/8	.51
801-020	2	1-7/16	1-7/16	2-15/16	2-15/16	5-7/8	2- 7/8	.79
801-025	2-1/2	1- 3/4	1- 3/4	3- 1/2	3- 1/2	7-1/32	3-1/2	1.46
801-030	3	2- 1/16	2- 1/16	3-31/32	3-31/32	7-15/16	4- 5/32	2.14
801-040	4	2-15/32	2-15/32	4- 3/4	4- 3/4	9-15/32	5- 1/4	3.51
801-050	5	3- 5/32	3- 5/32	5-13/16	5-13/16	11-5/8	6-13/32	5.80
801-050F*	5	5- 1/2	5- 1/2	8- 1/2	8- 1/2	17	6- 5/16	13.25
801-060	6	3-25/32	3-25/32	6-25/32	6-25/32	13-19/32	7-9/16	9.51
801-080	8	4-7/8	4-7/8	8- 7/8	8- 7/8	17-23/32	9-23/32	21.23
801-080F*	8	7- 5/8	7- 5/8	11- 7/8	11- 7/8	23- 3/4	9- 5/8	24.14