# **GENERAC**<sup>®</sup>

#### **XG SERIES Commercial/Residential Portable Generators**

Model 5802-2 UPC: 696471058024


(EPA/49-ST)

## **Features**

- Generac's OHVI® V-Twin Engine incorporates full pressure lubrication with automotive style spin-on oil filter for longer engine life.
- Covered Outlets provide protection from the environment and rugged working conditions.
- Low-Oil Pressure Shutdown safeguards engine from damage.
- PowerBar® monitors power usage.
- Hour Meter tracks maintenance intervals.
- Heavy-duty, never flat wheels for reliable portability.
- Illuminated control panel for improved visibility.
- Full-wrap, heavy-duty frame tubing for durability and strength.
- User-friendly design has conveniently placed engine controls for simple operation and easy start-up.
- TRUE POWER™ Technology provides clean, stable power ideal for sensitive electronics, tools and appliances.
- Cold Weather Valve reduces "icing" during cold weather operation.



#### AC Rated Output Running Watts 10000 AC Maximum Output Starting Watts 12500

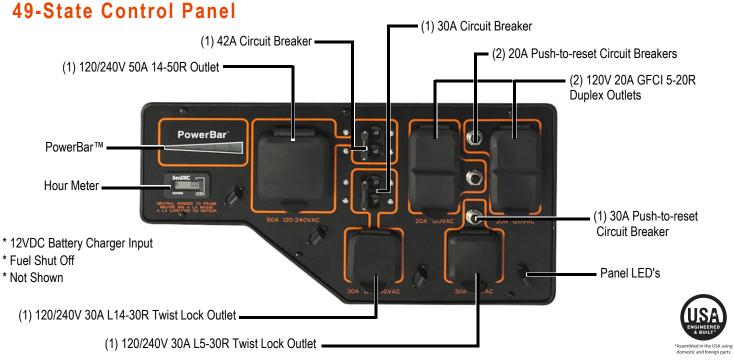

### **49-State Control Panel**

XG10000E



# XG10000E

# Specifications

XG10000	000	
XG10000		
XG1000	<b>00</b>	
XG1000		
XG100(		
XG100		
XG10(		
XG10		1
XG10		
Х С		
УĢ		
9 X		
X		
×		
$\times$		4
$\times$	$\mathbf{v}$	1
	►∶∢	


2 of 2

Product Series	XG10000E
Model (Configuration)	5802-2 (EPA/49-State)
AC Rated Output Running Watts	10000
AC Maximum Output Motor Starting Watts	12500
Rated AC Voltage	120/240 VAC
Rated AC Frequency	60 Hz
Rated 120/240 VAC Amperage	83.3/41.7
Engine Displacement	530cc
Engine Type	OHVI
Engine RPM	3600
Total Harmonic Distortion	<5%
Recommended Oil	10W-30 / SAE 30
Oil Capacity qt (L)	w/ Filter Change: 1.8 (1.7) w/o Filter Change: 1.5 (1.4)
Lubrication Method	Oil Pump
Automatic Voltage Regulation (AVR)	Yes
Choke Location	On Engine
Fuel Shut Off	On Control Panel

Starting Method	Electric
Battery Included	Yes
Battery Type	Lead Acid (12VDC, 18AH)
Battery Part No.	0H1663
Battery Dimensions	7.13" x 2.95" x 6.54"
Battery Wall Charger Adapter	Included
Low Oil Shutdown	Low Pressure
Neutral Bonded to Ground	Yes
Start Switch Type	On/Off/Start
Switch Location	On Engine
Fuel Gauge	Built-in Tank
Fuel Tank Capacity Gal (L)	10 (38)
Run Time at 50% (Hours)	10
Handle Style	Folding
Wheel Type	10" Semi-Solid Wheels
Maintenance Kit	Included
Warranty- Residential	2 Year
Warranty- Commercial	1 Year

# **Dimensions and Weights**

Length in (mm)	31.2 (792)
Width in (mm)	29.5 (749)
Height in (mm)	31.3 (793)
Extended Length in (mm)	50 (1270)
Carton Length in (mm)	34 (864)
Carton Width in (mm)	25.5 (641)
Carton Height in (mm)	33 (838)
Unit Weight Ibs (kg)	300 (136)
Shipping Weight Ibs (kg)	324 (147)

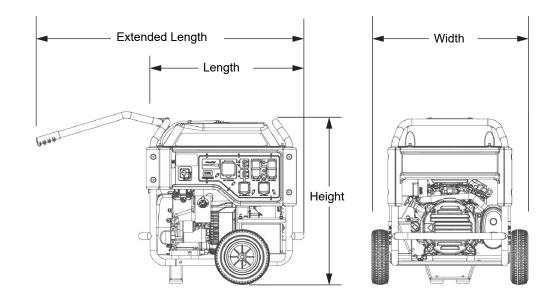



Generac Power Systems, Inc. • P.O. Box 8, Waukesha, WI 53187 • generac.com ©2019 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Part No. 0196470-D 08/19/19